



RICH 2013


8th International Workshop on Ring Imaging Cherenkov Detectors Shonan, Kanagawa, Japan

# CHERENKOV LIGHT IMAGING IN HIGH ENERGY AND NUCLEAR PHYSICS

Jochen Schwiening




GSI Helmholtzzentrum für Schwerionenforschung GmbH




## “Cherenkov Light Imaging in High Energy and Nuclear Physics”

What aspects should/will I try to cover in this review?

- Recent/current and future RICH systems for accelerator experiments...
- ...at large facilities – CERN, GSI, KEK, JLab, etc. ...
- ...in nuclear physics, hadron physics, particle physics...
- ...with a glance at the significance of enabling technologies...
- ...in 35 minutes or less.



photon detectors




CLAS12



ALICE






# SCOPE OF REVIEW

Many exciting RICH systems are outside the scope of this review:


- Neutrino detectors underground or in natural water/ice;
- Imaging air Cherenkov telescopes.

Will be reviewed by **Razmik Mirzoyan** Wednesday afternoon

“Cherenkov light imaging in Astroparticle Physics”



PIERRE AUGER OBSERVATORY



Tunka-133




SNO



KM3NeT



ICECUBE SOUTH POLE NEUTRINO OBSERVATORY



## BASIC CHERENKOV THEORY

## TYPES OF CHERENKOV COUNTERS

## RICH DETECTOR COMPONENTS

RADIATORS


PHOTON DETECTORS

## IMAGING PRINCIPLES

## EXAMPLES OF RICH COUNTERS


THE PAST: 80S TO TODAY

FUTURE RICH SYSTEMS

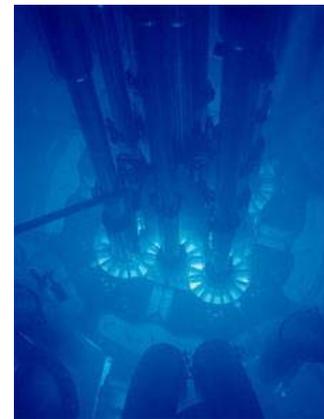


Pretty much following basic structure of our recent review article  
“*Cherenkov Counters*”, B. Ratcliff & J. Schwiening,

in “*Handbook of Particle Detection and Imaging*,” Claus Grupen, Irene Buvat (eds.), Springer-Verlag Berlin Heidelberg 2011



# CHERENKOV RADIATION

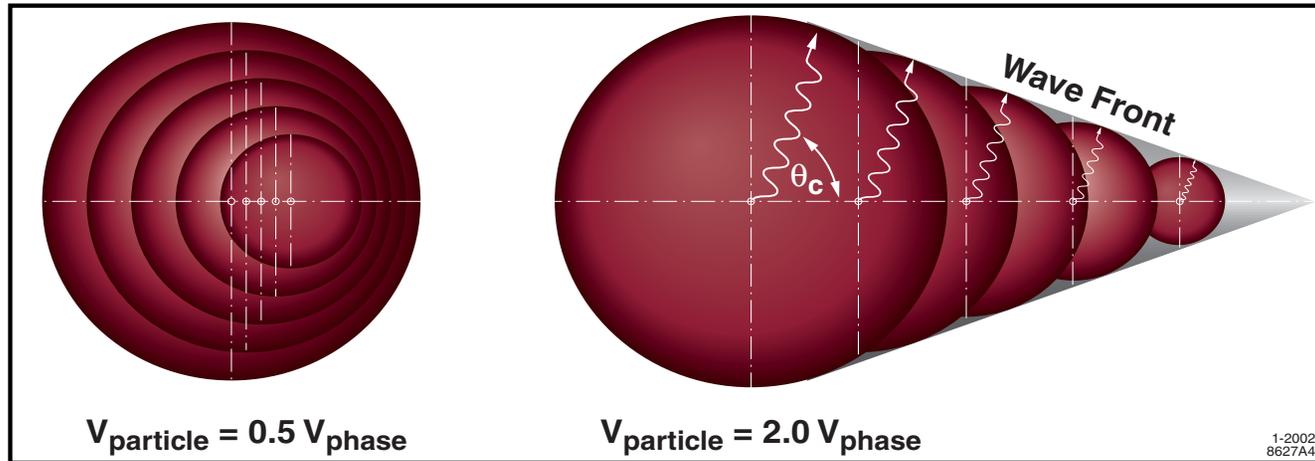

Threshold:


$$\beta_{\text{thresh}} = \frac{v_{\text{thresh}}}{c} = \frac{1}{n(\lambda)}$$

Production angle:

$$\cos \theta_c = \frac{1}{\beta n(\lambda)}$$

Number of photons:




$$N_{\text{photons}} = L \frac{\alpha^2 z^2}{r_e m_e c^2} \int \sin^2 \theta_c(E) dE$$



Cherenkov light produced equally distributed  
over photon energies, proportional  $1/\lambda^2$   
→ eery blue light seen in nuclear reactors


For a given medium, refractive index  $n$ ,  
there is a threshold for light production at  $\beta = 1/n$

- Particles with  $\beta < 1/n$  produce no light
- Particles with  $\beta > 1/n$  produce light

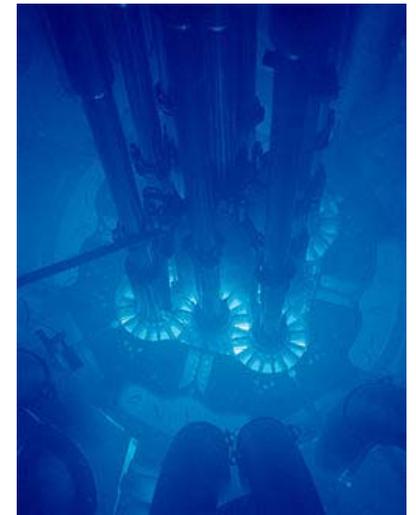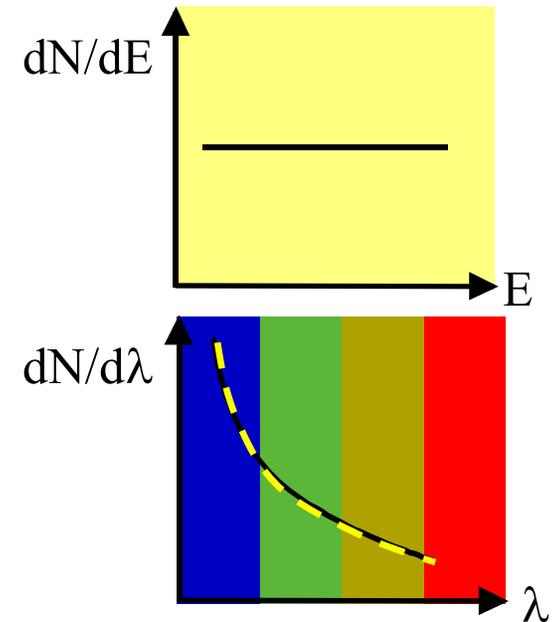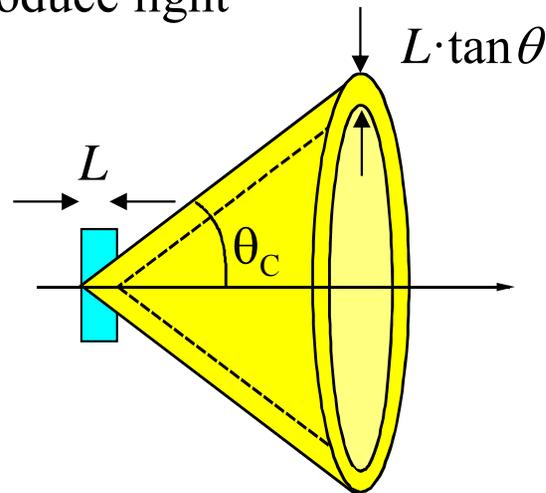


# CHERENKOV LIGHT DETECTION

Everything is strongly linked with the choice of the photo converter

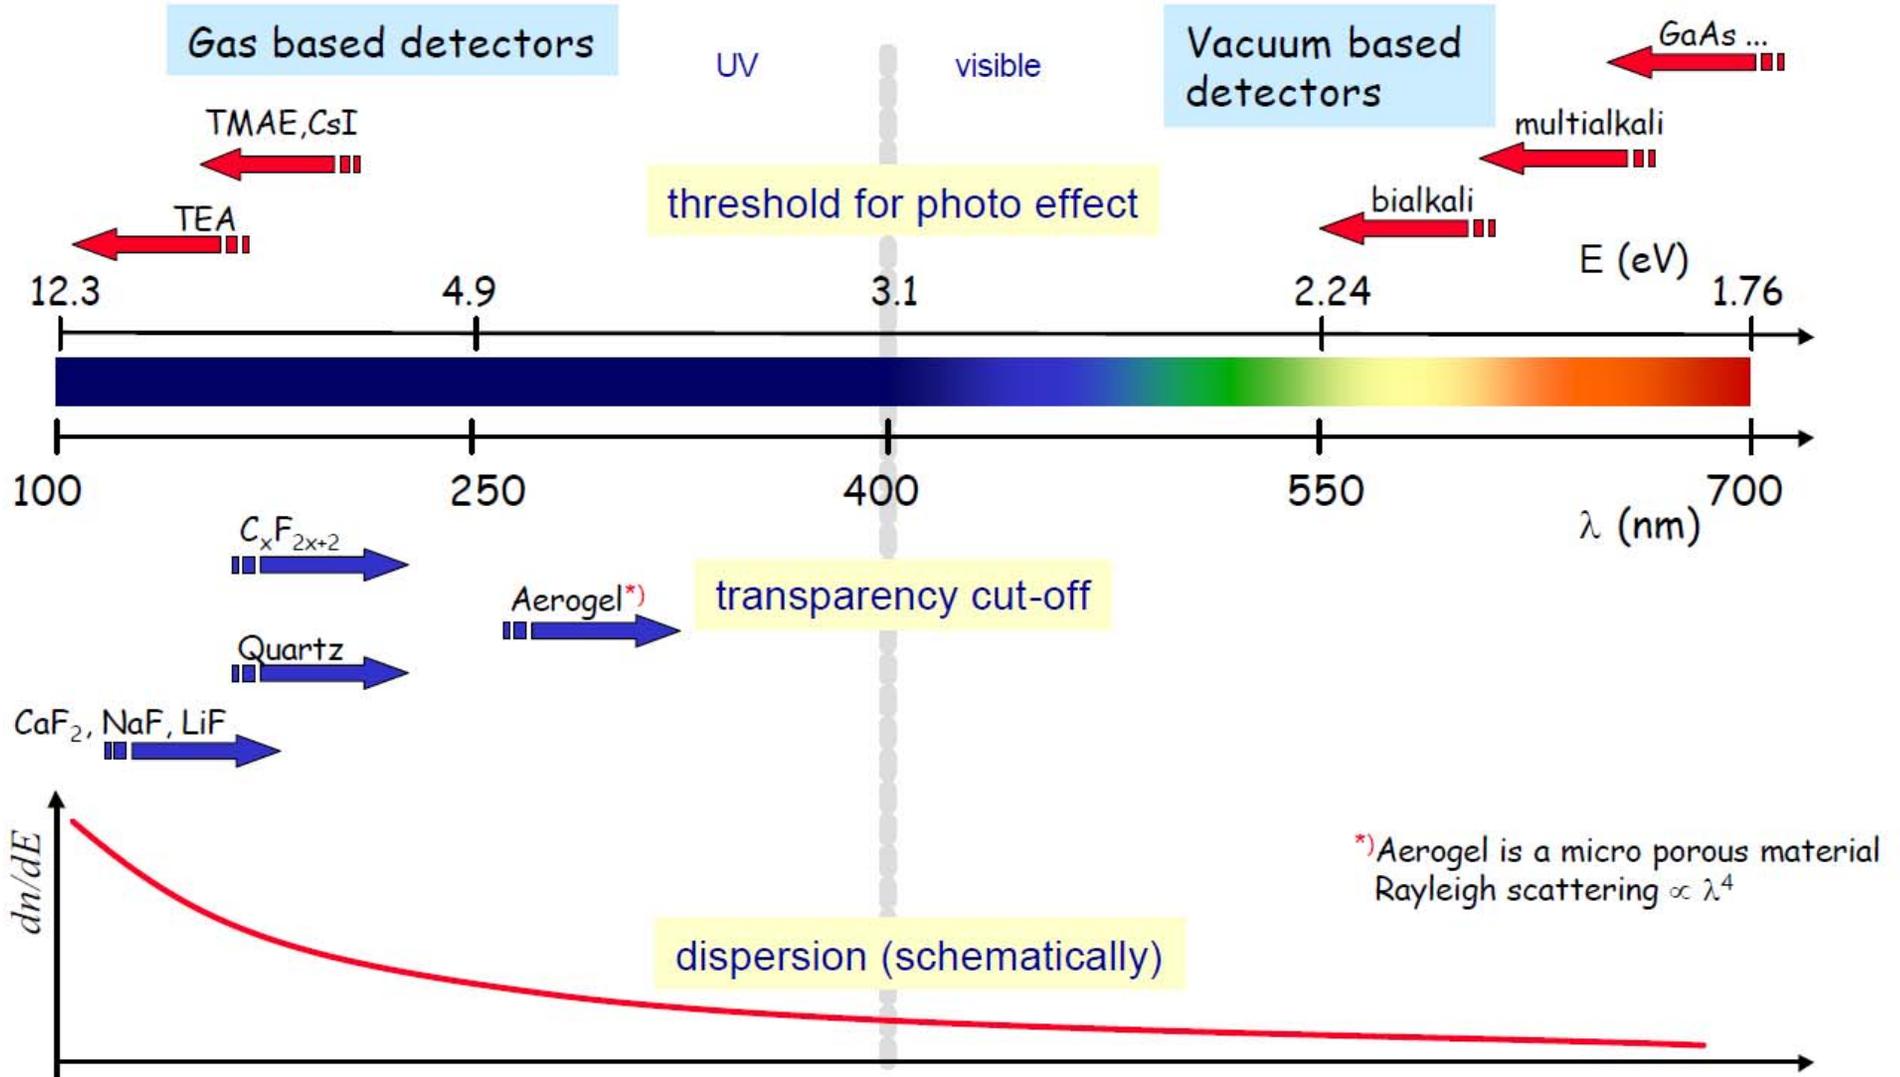


Topical Seminar on the Legacy of LEP and SLC, Siena, 8-11 Oct. 2001, Christian Joram




## Cherenkov radiation: attractive properties for particle detectors

- Existence of a **threshold velocity**;
- **Number of photons** related to particle velocity;
- **Emission angle** related to particle velocity;
- Angle and photon yield depend on particle charge  $Z$ .

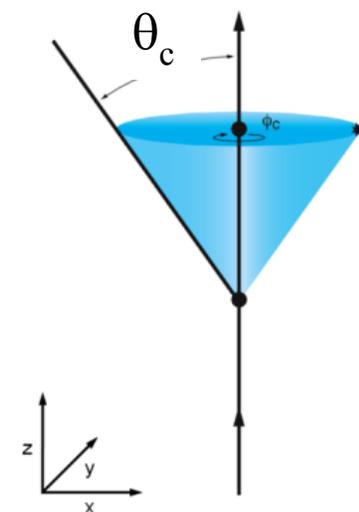

## Main Cherenkov detector concepts in particle physics:

- Select material with refractive index  $n$  where particle type A produces Cherenkov light, particle type B does not  $\rightarrow$  **threshold counter**
- Select material with refractive index  $n$  where multiple Cherenkov photons are detected for most particle species, image Cherenkov ring, precisely measure Cherenkov angle  $\rightarrow$  **Ring Imaging Cherenkov counter (RICH)**
- Compare ring image with expected image for  $e/\mu/\pi/K/p$  (likelihood test) or calculate mass from track  $\beta$  using independent momentum measurement (B field, tracking).



After a few days I realized:

- Jürgen Engelfried gave this talk in a much nicer way at RICH 2010.

- I have nothing original to add.

→ I needed a new outline!

Fundamentals of Ring Imaging  
Recent Developments  
Summary

**Cherenkov Light Imaging  
Fundamentals and recent Developments**

Jürgen Engelfried

Instituto de Física  
Universidad Autónoma de San Luis Potosí  
Mexico

7th International Workshop on  
Ring Imaging Cherenkov detectors  
May 2-7, 2010, Cassis, France








Jürgen Engelfried Cherenkov Light Imaging 1/59



## BRIEF INTRODUCTION TO RICH COUNTERS

## COMPREHENSIVE OVERVIEW OF SUBMITTED PAPERS


## CONCLUSIONS AND OUTLOOK

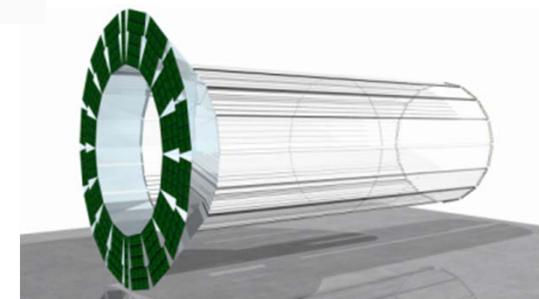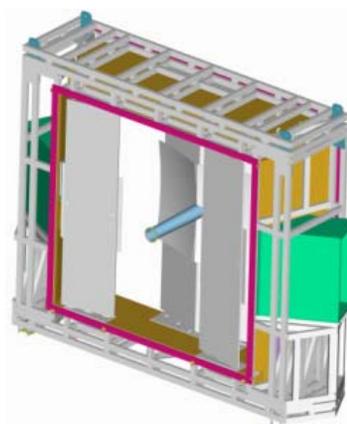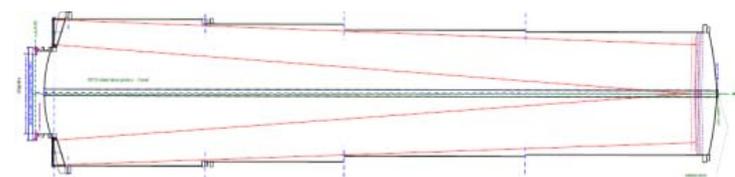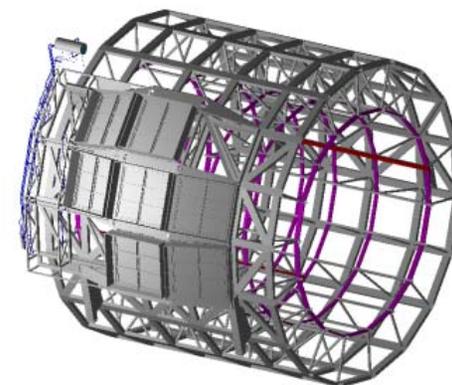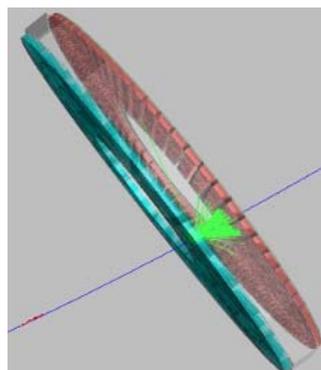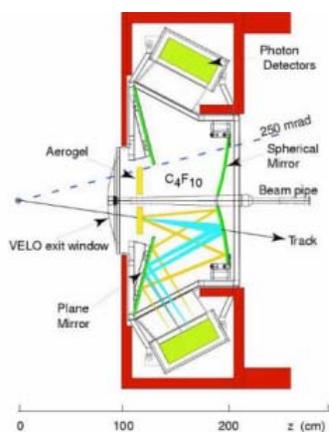

# SCOPE OF REVIEW

List of contributions:

- 54 abstracts within scope of this review,
- 28 talks on RICH systems, photon detectors, technical advances, prototyping.

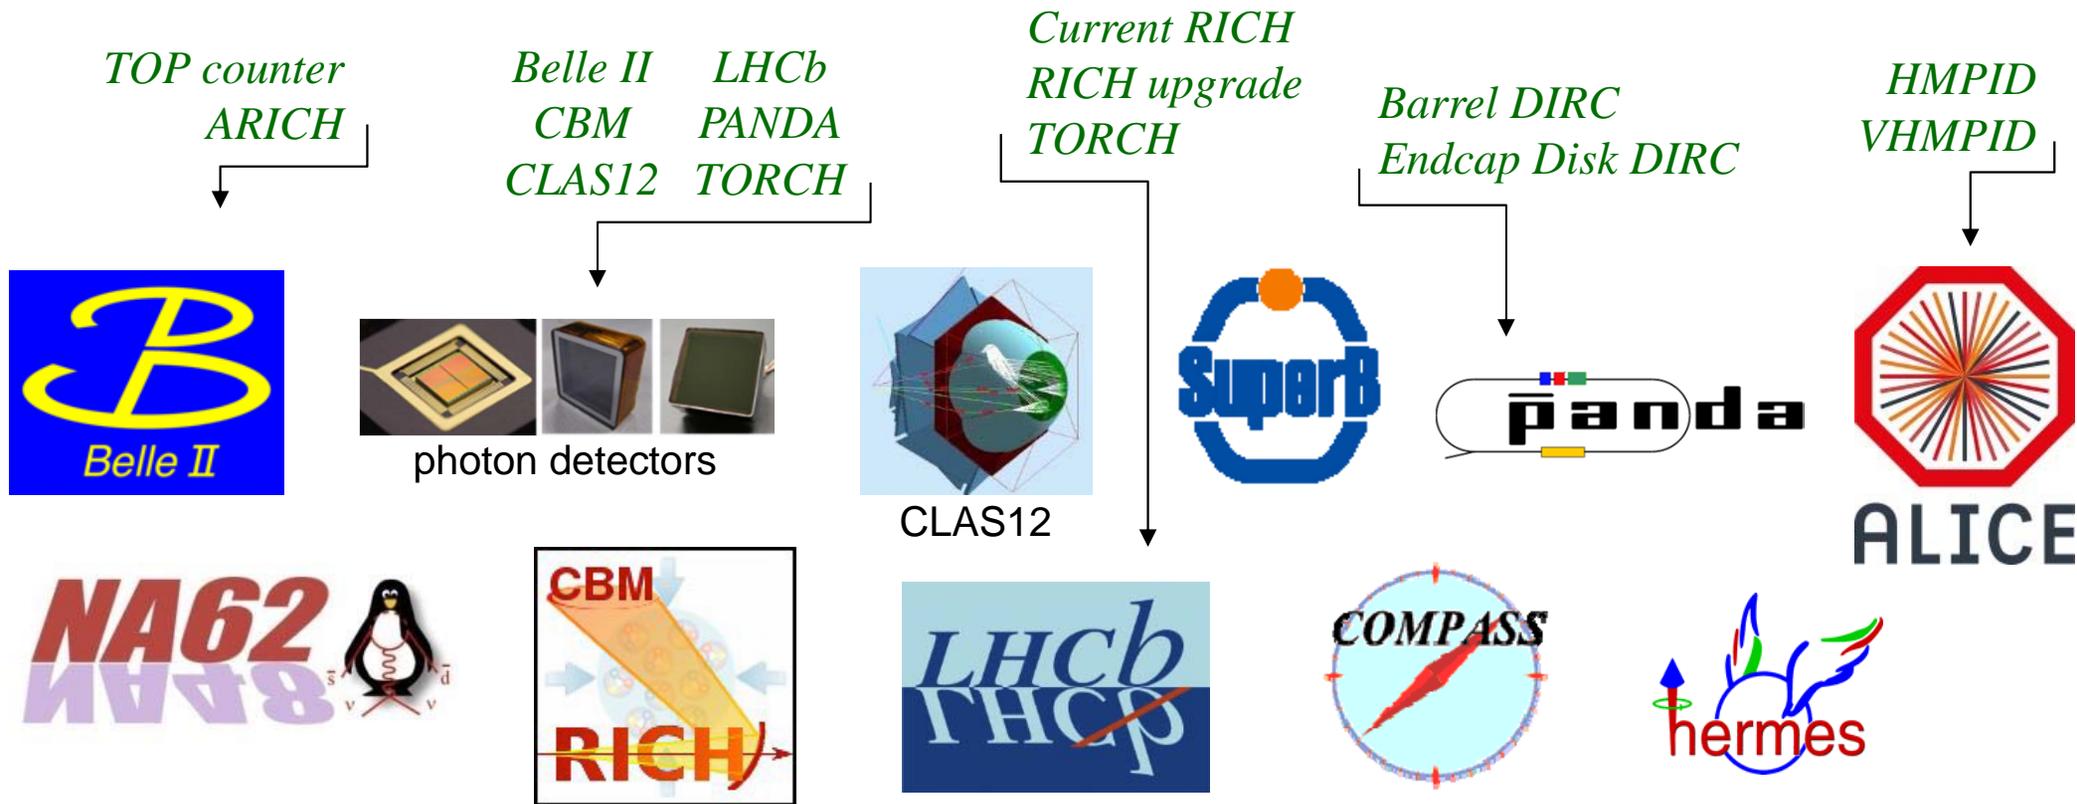




# SCOPE OF REVIEW

## List of contributions:

- 54 abstracts within scope of this review,
- 28 talks on RICH systems, photon detectors, technical advances, prototyping.
- Leaderboard: Belle II (13), LHCb (7), PANDA (6), CBM (4), ALICE (3).

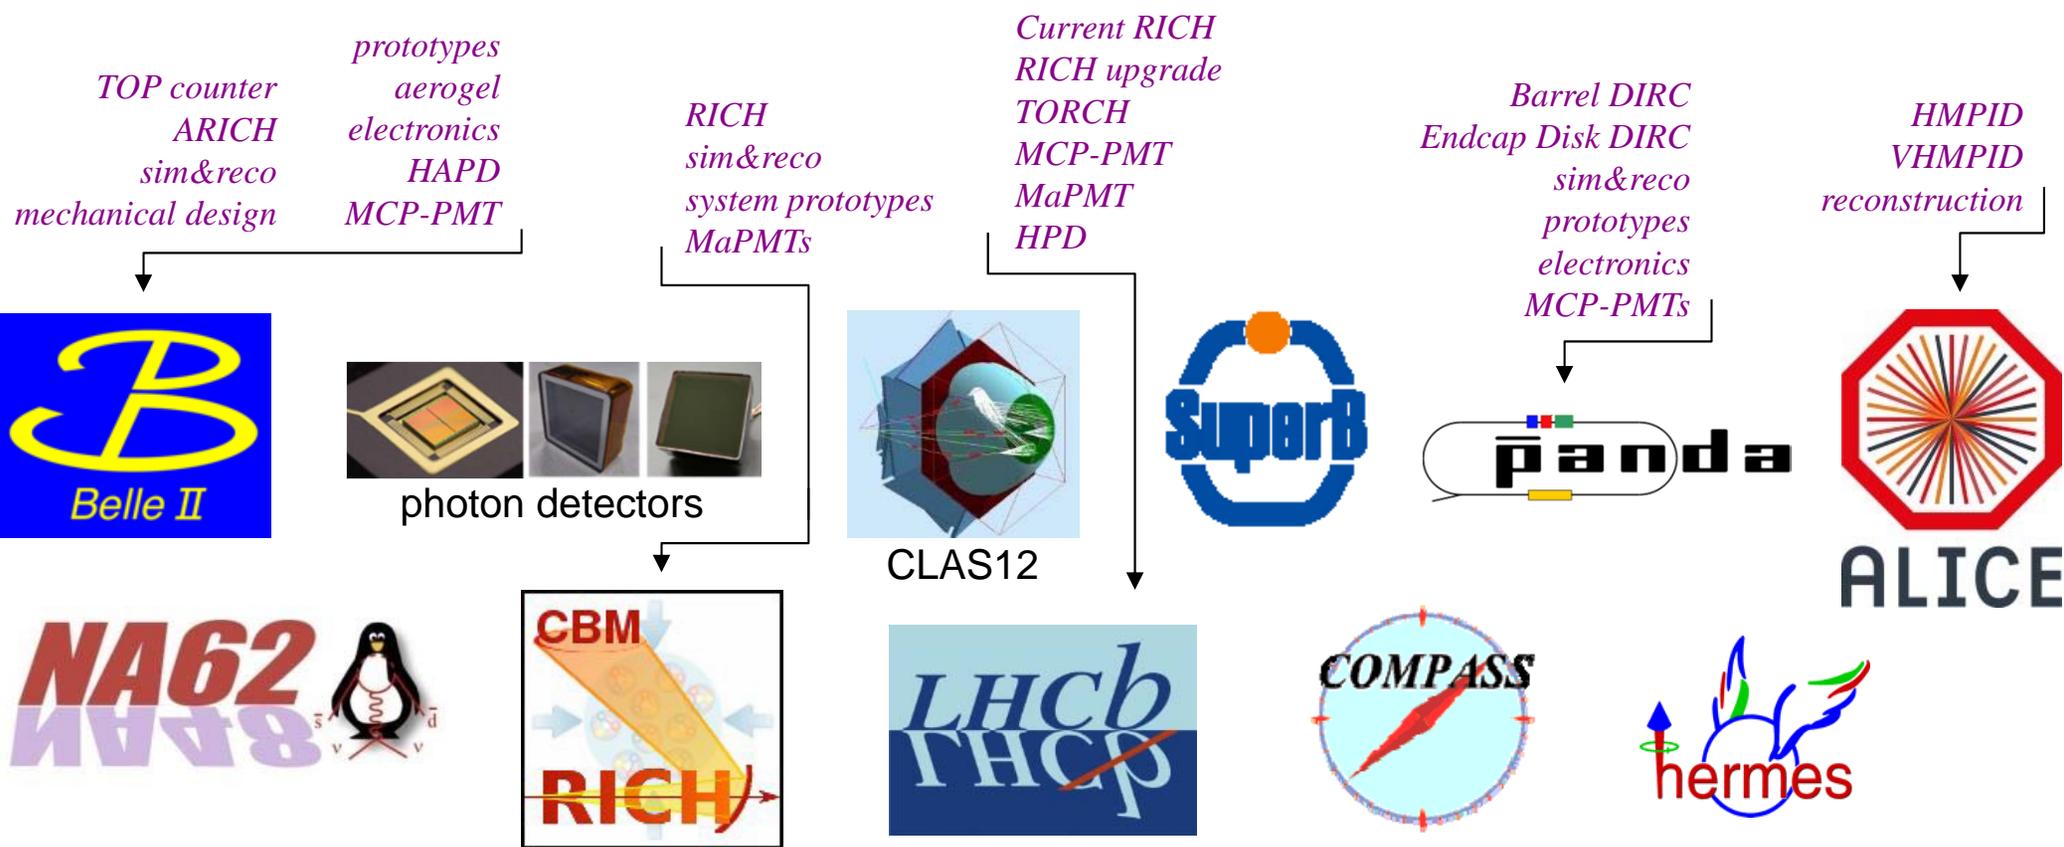




## List of contributions:


- 54 abstracts within scope of this review,
- 28 talks on RICH systems, photon detectors, technical advances, prototyping,
- Lead

This would leave me with:

- 39 seconds per abstract
- 75 seconds per talk.

→ I needed a new outline! (again)













## BRIEF INTRODUCTION

## FEW SELECTED RICH SYSTEM EXAMPLES

## TRENDS AND TECHNOLOGY ADVANCES

## CONCLUSION

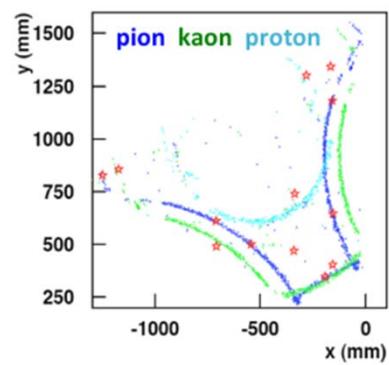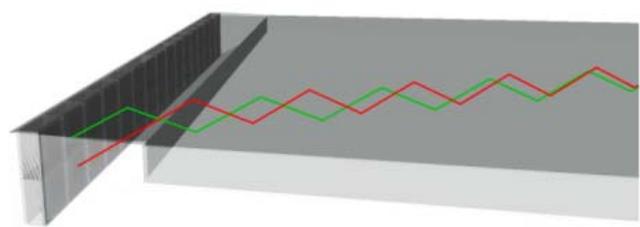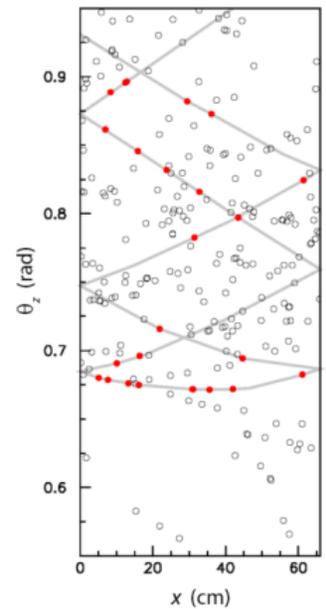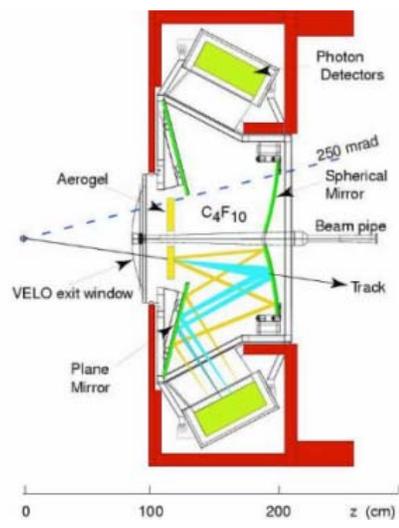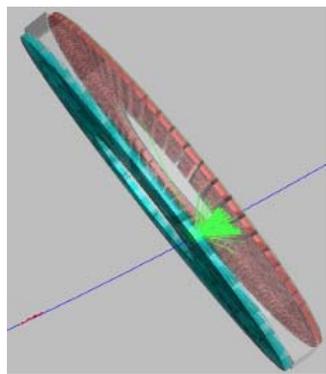



## BRIEF INTRODUCTION

## FEW SELECTED RICH SYSTEM EXAMPLES


## TRENDS AND TECHNOLOGY ADVANCES

## CONCLUSION

I have to pick and choose systems/technologies – the picture will be completed by reviews

- *Status and perspectives of gaseous photon detectors*, A. Di Mauro – Tue 8:30
- *Status and perspectives of solid state photon detectors*, G. Collazuol – Tue 9:10
- *Status and perspectives of vacuum-based photon detectors*, O. Siegmund – Tue 10:20
- *Optical components for Cherenkov light imaging devices*, J. Va'vra – Wed 8:30
- *Use of RICH detectors for physics*, S. Stone – Thu 15:50

and the other talks today...



# SESSION OVERVIEW

*The RICH Detector of the NA62 Experiment at CERN, M. Piccini, Mon 10:30*

*TOP counter for particle identification at Belle II experiment, K. Inami, Mon 10:55*

*The PANDA Barrel DIRC Detector, M. Hoek, Mon 11:20*

*The LHCb RICH system; detector description and operation, A. Papanestis, Mon 14:00*

*ALICE-HMPID performance during the LHC run period 2010-2013, G. de Cataldo, Mon 14:25*

*The large-area hybrid-optics CLAS12 RICH detector, M. Contalbrigo, Mon 14:50*

*Aerogel RICH counter for the Belle II forward PID, S. Nishida, Mon 15:15*

*Tests of FARICH prototype with fine photon position detection, E.A. Kravchenko, Mon 16:10*

*R&D on high momentum particle identification with a pressurized Cherenkov radiator, M. Weber, Mon 16:35*


*Development of an Endcap DIRC for PANDA, O. Merle, Mon 17:00*

*The CBM RICH project, C. Pauly, Mon 17:25*

*Upgrade of LHCb RICH Detectors, S. Easo, Mon 18:10*

*Results from the FDIRC prototype, D. Roberts, Mon 18:35*

*TORCH - a Cherenkov based Time-of-Flight detector, M. van Dijk, Mon 19:00*



## Future RICH Systems with Aerogel Radiators

**Belle II** Forward RICH (focusing, 2 layers)

**CLAS12** (compact hybrid optics)

**FARICH** R&D (focusing, multi-layers, possible use in ALICE, Super Tau-Charm, PANDA)



## Future RICH Systems using Solid Radiators


**Belle II** TOP (barrel, plate geometry, very fast timing)

**PANDA** Barrel DIRC (barrel, bar or plate, fast timing)

**PANDA** Endcap Disk DIRC (endcap, segmented disk, fast timing, focusing lightguide)

**TORCH** (LHCb upgrade) (forward detector, plate, fast timing, focusing lightguide)





My apologies to the current and new RICH systems with gaseous radiators.

Four talks will discuss the future systems in the sessions today (*few slides in appendix*).




PID	$\mu/\pi$	$e/\pi$	$\pi/K, K/p$
Radiator	Neon	CO <sub>2</sub>	C <sub>4</sub> F <sub>8</sub> O
Momentum	15...35 GeV/c	<10 GeV/c	5...25 GeV/c
Photon detector	HPK R7400U-03	HPK H8500	CsI-MWPC
Timeline	Commissioning 2014	Installation 2017	Proposed (2017/18)

*The RICH Detector of the NA62 Experiment at CERN, M. Piccini, Mon 10:30*

*ALICE-HMPID performance during the LHC run period 2010-2013, G. de Cataldo, Mon 14:25*

*R&D on high momentum particle identification with a pressurized Cherenkov radiator, M. Weber, Mon 16:35*

*The CBM RICH project, C. Pauly, Mon 17:25*




Next generation of aerogel RICHes will profit from past experience (HERMES, Belle, LHCb) and major technological advances in

## Aerogel quality

- improved clarity
- fine tuning of refractive index
- large tiles

## Photon detection





- small pixels
- fast timing

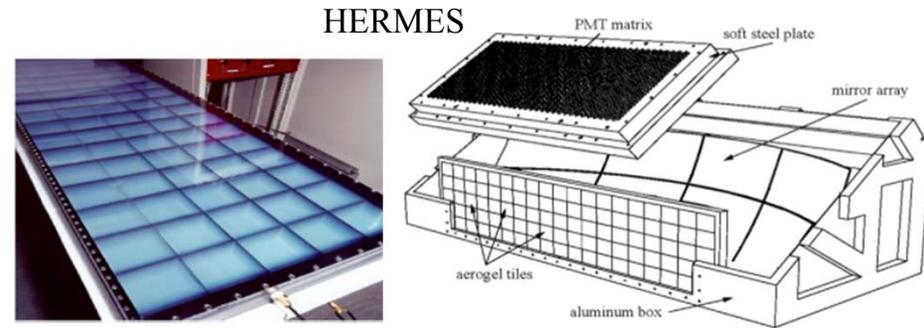


BelleII



FARICH

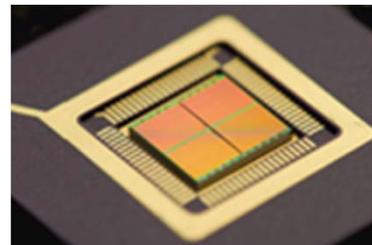
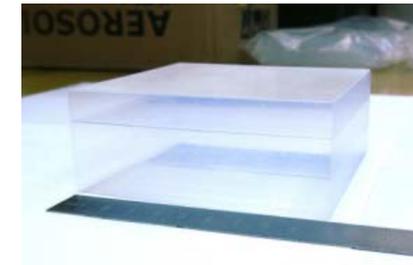





Significant improvement in clarity and maximum size of aerogel tiles  
(minimize photon loss in bulk and on edges of tile)

Pinhole drying method further improves transmission  
but currently yield of crack-free tiles still low

Hydrophobic aerogels can be precision-cut using water jet.

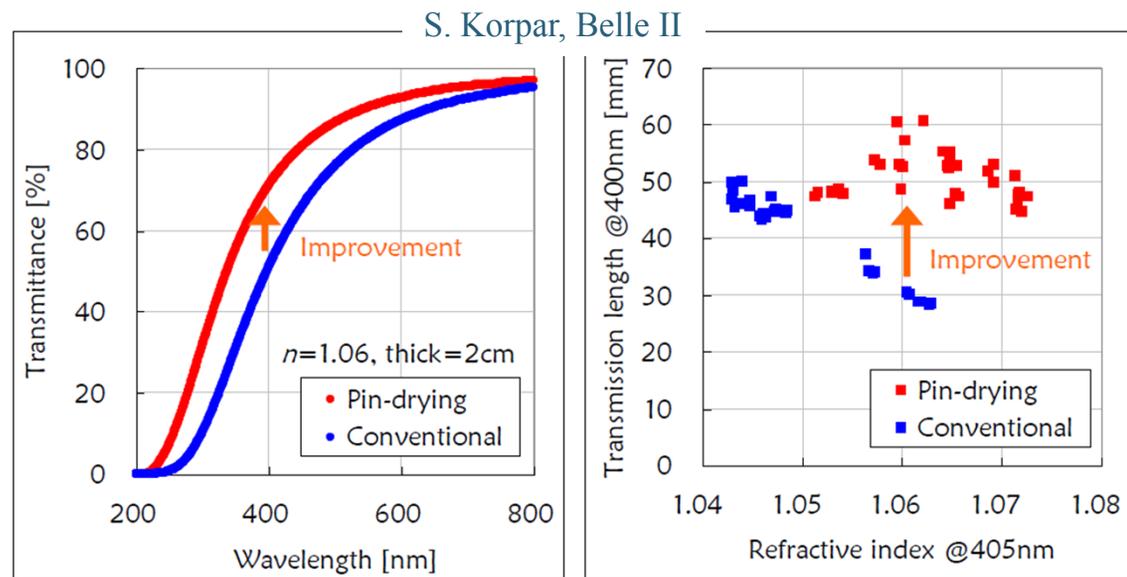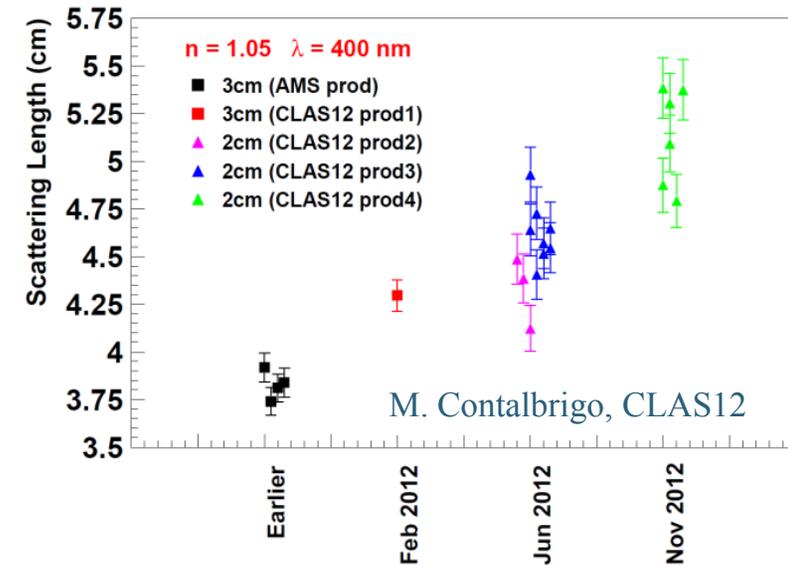



➤ M. Contalbrigo, Mon 14:50

**CLAS12 RICH** goal:  $4\sigma$   $\pi/K$  separation for 3...8GeV/c




Complex optical paths possible due to improved aerogel transparency.

Direct photons from 2cm tile, detected on MaPMT array:

best resolution (smaller angles, high-momentum tracks)

Reflected photons from 6cm tile, reflected from spherical mirror and planar mirror, passing twice through 2cm aerogel before detection on same MaPMT array:  
still good resolution and photon yield.

→ compact optics, smaller total MaPMT area needed.

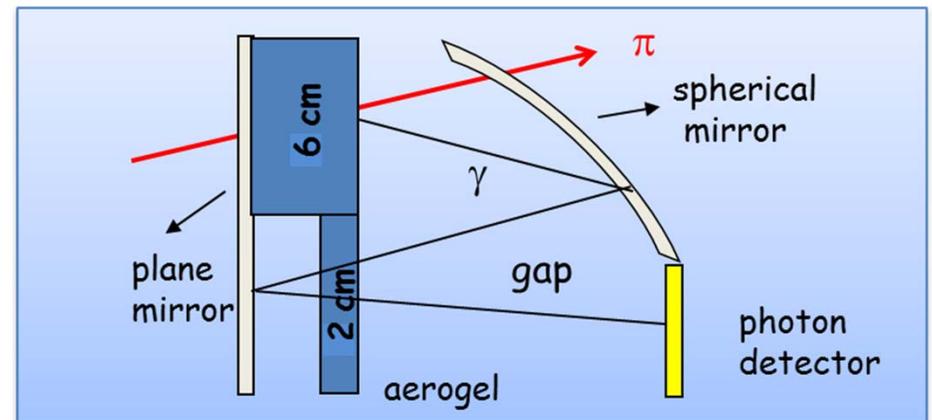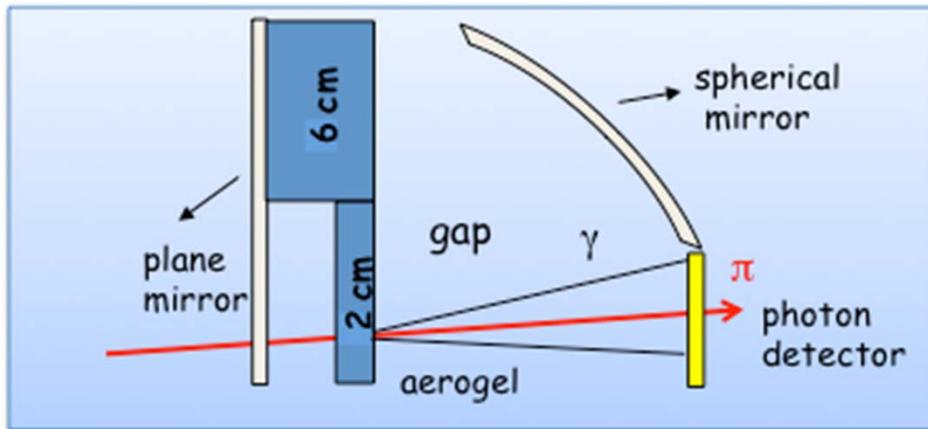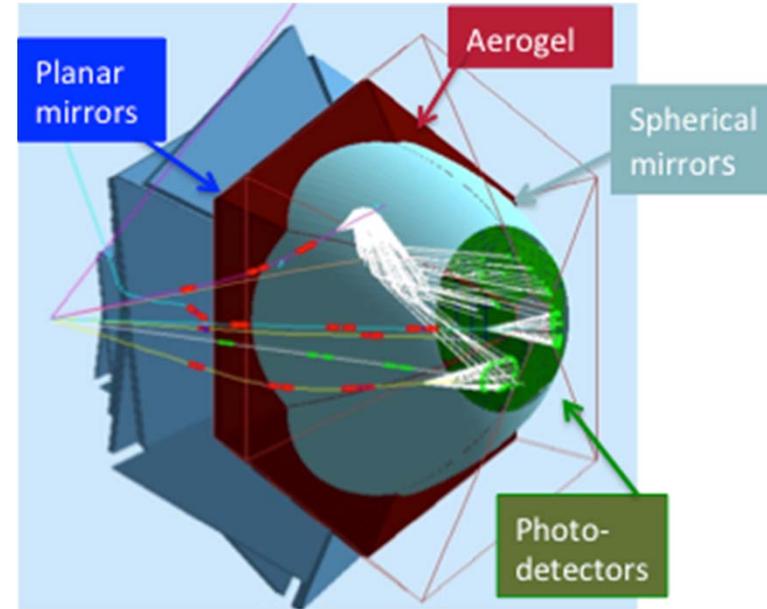





➤ M. Contalbrigo, Mon 14:50

**CLAS12 RICH** prototype in test beam at CERN,  
 measure direct paths and focused/reflected paths  
 (incl. 2cm aerogel absorber).


Clean rings for both scenarios.

For direct path: 13 photons per track and good  $\pi/K$  separation  
 up to maximum CLAS12 momenta.

direct photon path configuration

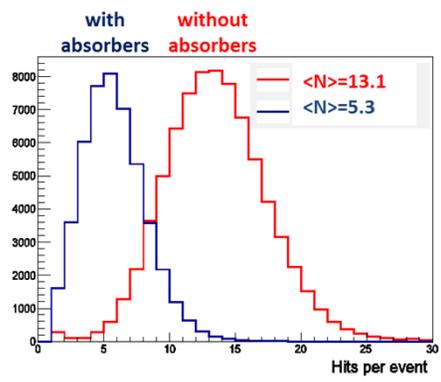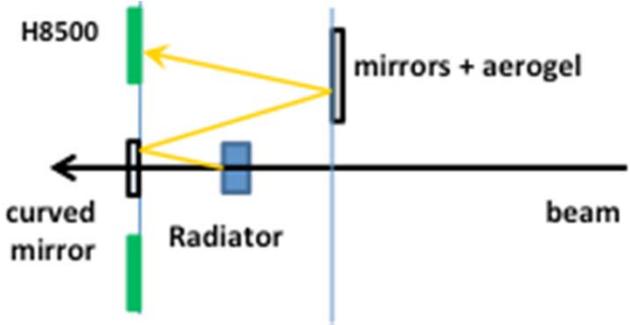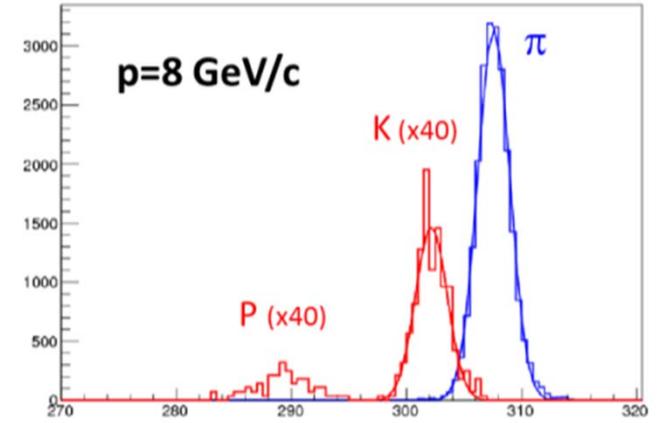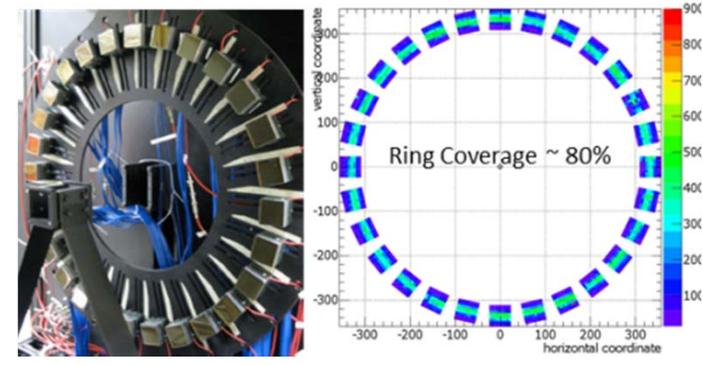

For reflected path: still reasonable  
 photon yield and resolution.



To increase light yield **combine two aerogel tiles**

with refractive index  $n_1, n_2$

Choice of imaging strategy

tiles with refractive index  $n_1 = n_2$

→ ring twice the thickness as single tile, poor resolution

tiles with refractive index  $n_1 < n_2$

→ photons from the two tiles are imaged to same radius


“**focusing** aerogel”


tiles with refractive index  $n_1 > n_2$

→ photons from the two tiles can be cleanly separated

“Focusing aerogel” improves Cherenkov angle resolution

without loss in photon yield. (*NIM A548 (2005) 383, NIMA 565 (2006) 457*)

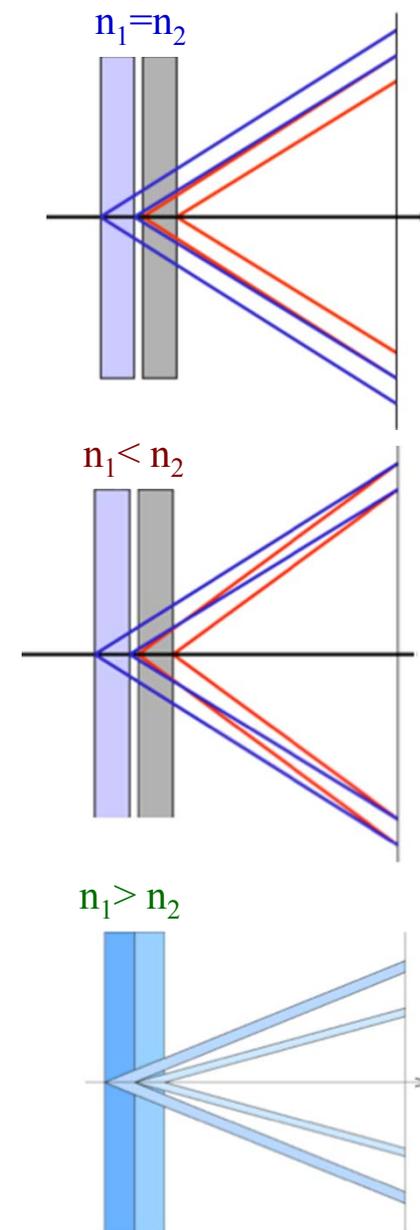



# AEROGEL RICHES – BELLE II

S. Nishida, Mon 15:15

**Belle II ARICH** goal:  $4\sigma$   $\pi/K$  separation for 1...3.5GeV/c

Recent prototype in particle beam at DESY in 2013




(HAPD readout):

8.6 photons per track,

15.4mrad single photon resolution.

Meets Belle II PID requirements.

Full ARICH system installation planned for spring 2015.

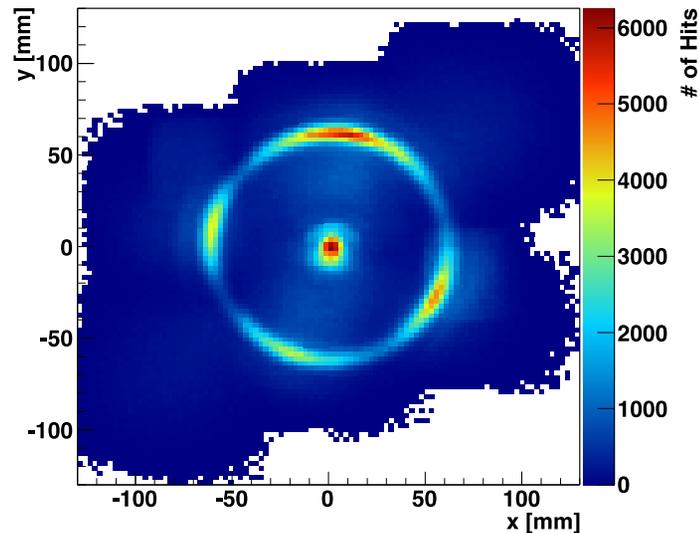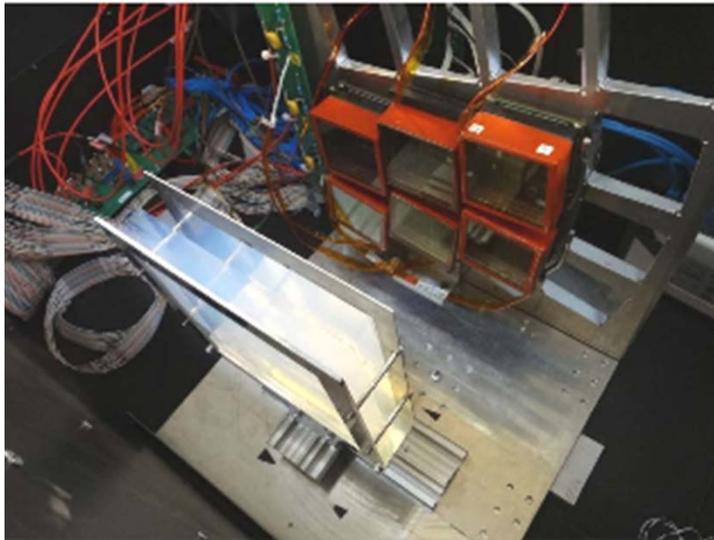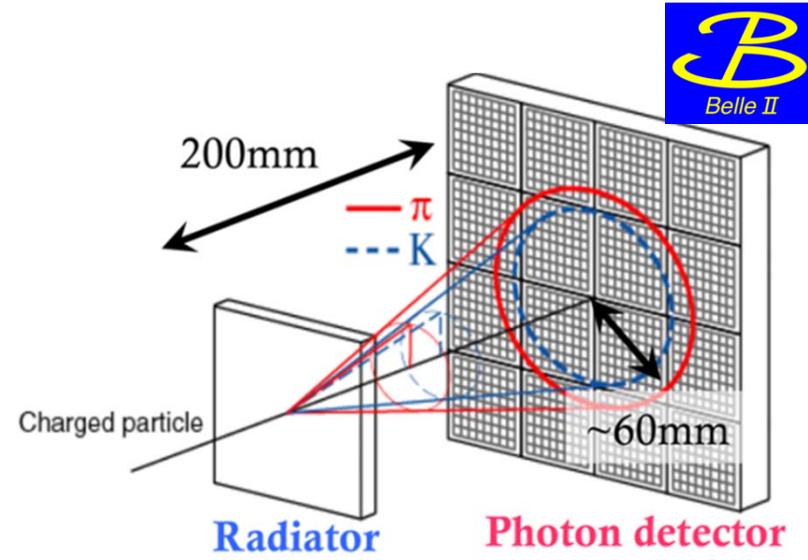

$$n_1 = 1.045$$

$$n_2 = 1.055$$



➤ E.A. Kravchenko, Mon 16:10

## FARICH prototype in CERN test beam

4-layer aerogel ( $n_{\max}=1.046$ , thickness 37.5mm)

dSiPM matrix readout

20 x 20 cm<sup>2</sup> Philips DPC3200-22-44

3x3 modules = 6x6 tiles = 24x24 dies = 48x48 pixels in total



14 photons per track,


48ps single photon timing,

3.8 $\sigma$   $\pi$ /K separation at 6 GeV/c.

Technology may have potential for  $\pi$ /K PID  
up to 10GeV/c

Possible candidate for PANDA Forward RICH,  
Super Tau-Charm, ALICE VHMPID.

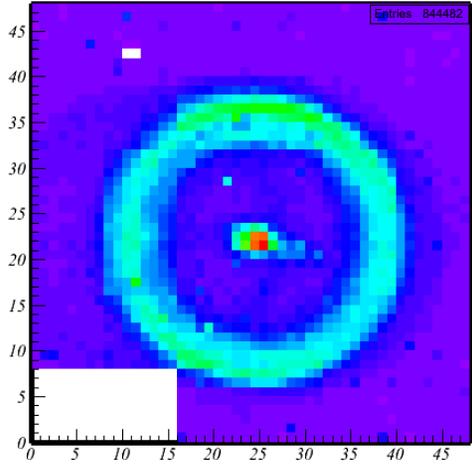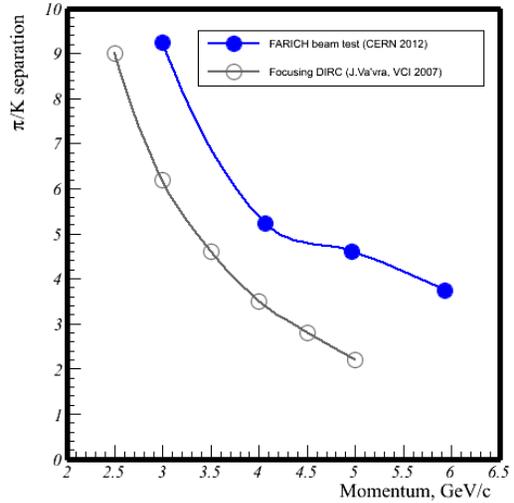




# FUSED SILICA RICHES

Next generation of RICHes with fused silica radiators will follow in the footsteps of successful BABAR-DIRC, making use of technological advances in


## Photon detection

- small pixels
- fast timing
- long lifetime

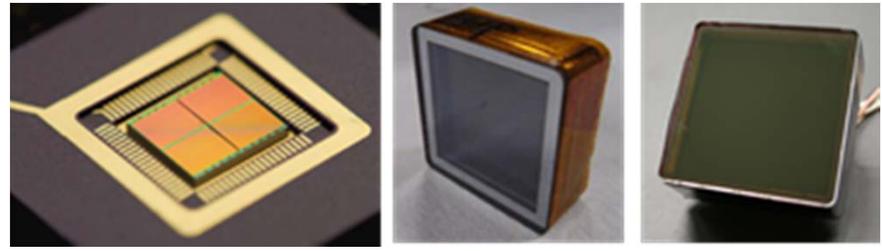


## Focusing optics

PANDA



TORCH






FDIRC



## Time imaging

Belle II

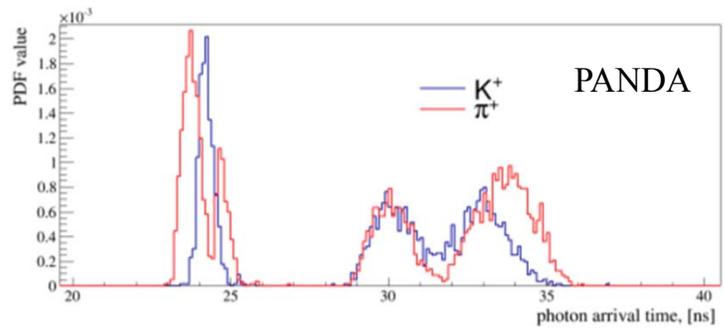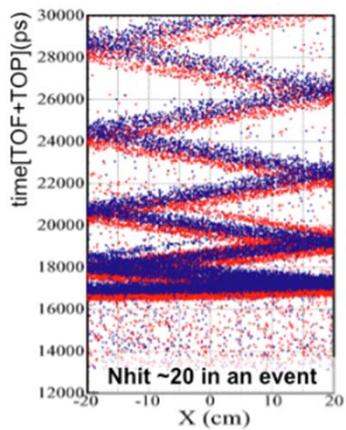





## Detection of Internally Reflected Cherenkov Light

Used for the first (and, so far, only) time in BABAR as primary hadronic particle ID system, flavor tagging,  $\pi/K$  ID to 4GeV/c.



- 1992: first publication of DIRC concept<sup>§</sup>.
- 1993-1996: progression of prototypes and DIRC R&D.
- Nov 1994: decision in favor of DIRC for hadronic PID for BABAR.
- Nov 1998: installed part of DIRC; start of cosmic ray run, commissioning run.
- April 1999: BABAR moves into beam line, added 4 more bar boxes.
- Nov 1999: all 12 bar boxes installed, start of first physics run.
- April 2008: last event recorded with BABAR.
- Oct 2013: call for proposals for reuse of BABAR DIRC radiator bars.

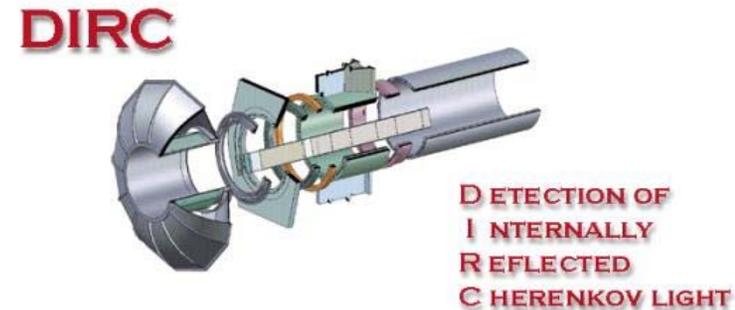


<sup>§</sup>B. Ratcliff, SLAC-PUB-6047 (Jan. 1993)






- **Charged particle** traversing radiator with refractive index  $n$  with  $\beta = v/c > 1/n$  emits **Cherenkov photons** on cone with half opening angle  $\cos \theta_c = 1/\beta n(\lambda)$ .
- For  $n > \sqrt{2}$  some photons are always **totally internally reflected** for  $\beta \approx 1$  tracks.
- **Radiator and light guide**: bar, plate, or disk made from **Synthetic Fused Silica** (“Quartz”) or fused quartz or acrylic glass or ...
- Magnitude of Cherenkov angle conserved during internal reflections (provided optical surfaces are square, parallel, highly polished)
- Mirror attached to one bar end, reflects photon back to readout end.

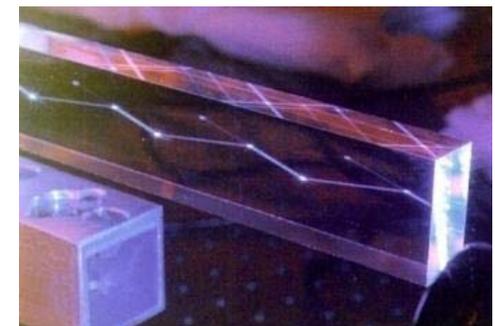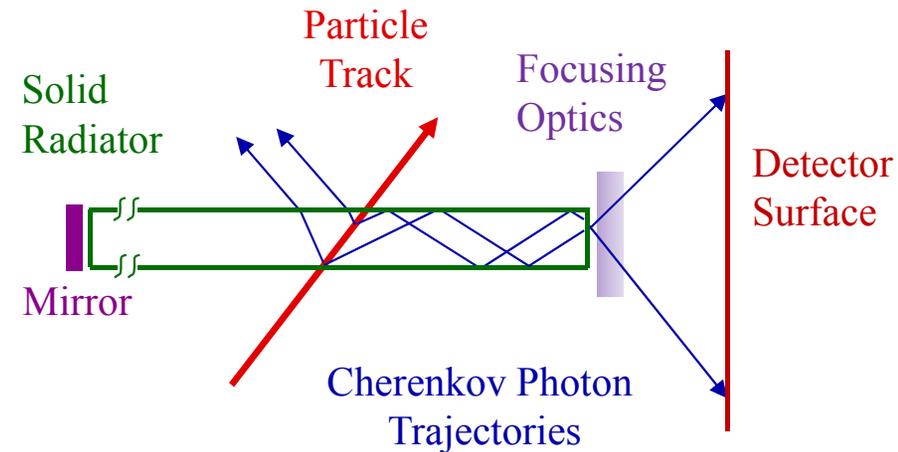




- Photons exit radiator via optional **focusing optics** into **expansion region**, detected on **photon detector array**.
- DIRC is intrinsically a **3-D device**, measuring: **x, y, and time** of Cherenkov photons, defining  $\theta_c$ ,  $\phi_c$ ,  $t_{\text{propagation}}$ .
- **Ultimate deliverable for DIRC: PID likelihoods.**  
Calculate likelihood for observed hit pattern (in detector space or in Cherenkov space) to be produced by  $e/\mu/\pi/K/p$  plus event/track background.

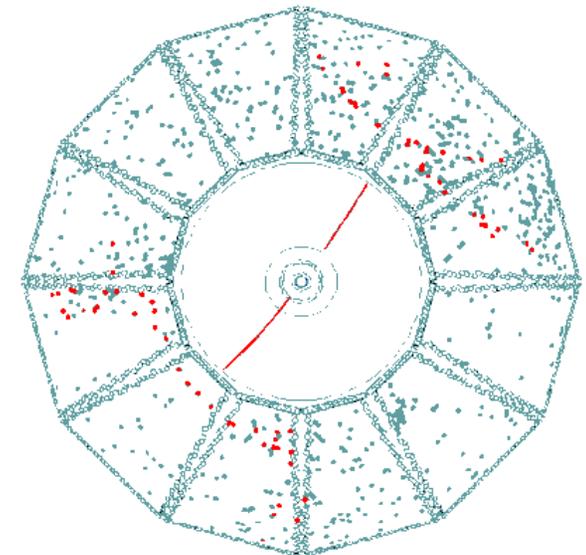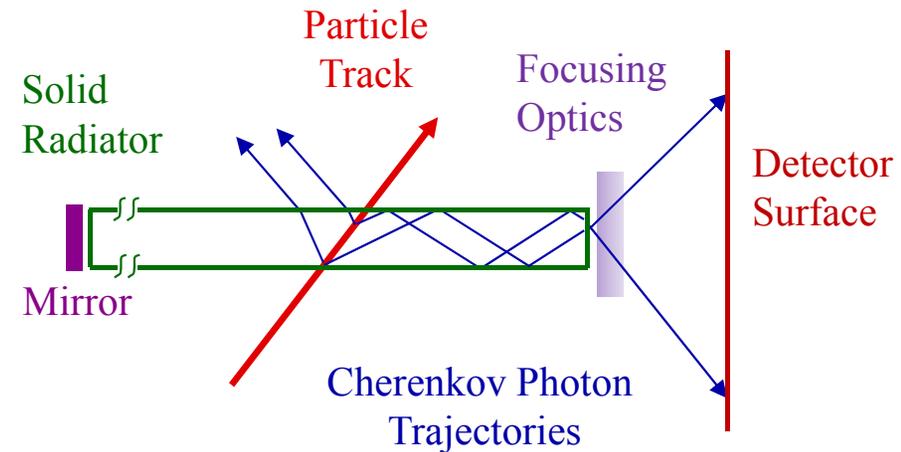



# BABAR DIRC COMPONENTS

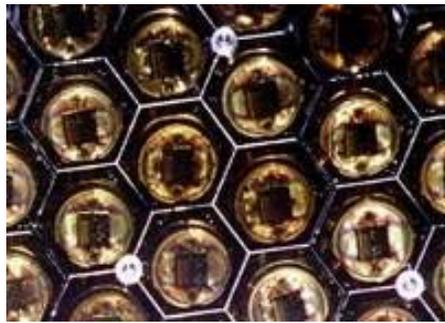

## Photon detectors:

~11,000 standard 1" PMTs  
with light concentrators

## Expansion volume:


Large tank with ~6,000 liters ultra-pure water


## Radiators:

144 long bars, made of 576 short bars  
synthetic fused silica  
5A rms polish, square, sharp corners

**Bar box:** 12 bar boxes in BABAR  
12 long (4.9m) bars per box  
150 $\mu$ m air gap between bars  
dry nitrogen flow




**Long bar:** 4 short (1.225m) bars  
Mirror on forward end  
Wedge on readout end

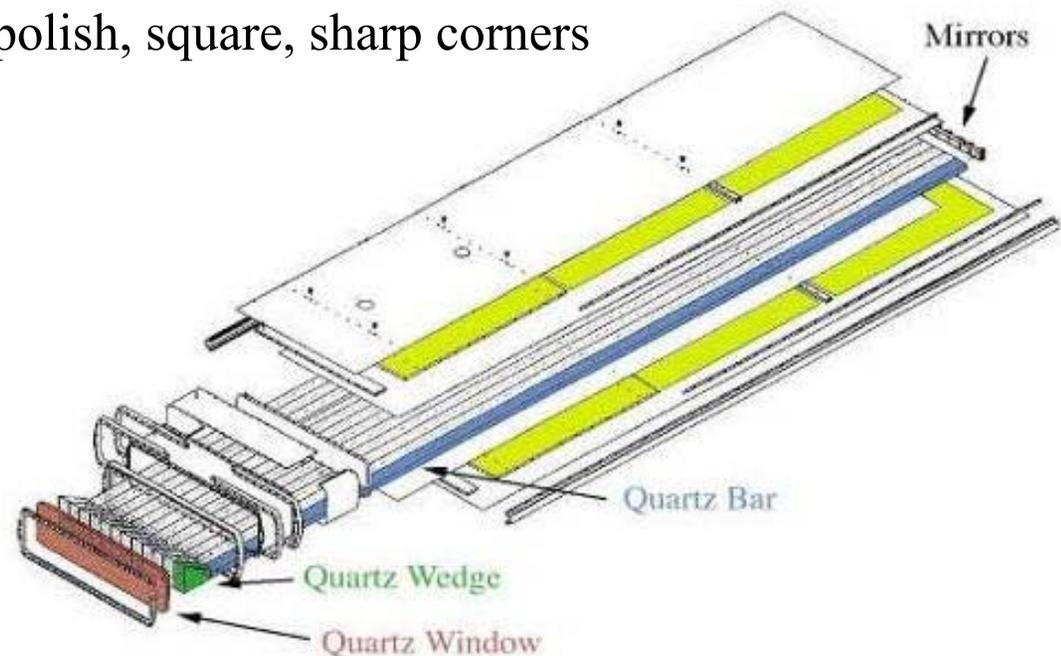




# BABAR DIRC PERFORMANCE

Single photon timing resolution	1.7ns
Single photon Cherenkov angle resolution	~10mrad
Photon yield	20-60 photons per track
Track Cherenkov angle resolution	2.4mrad (di-muons)
$\pi/K$ separation power	4.3 $\sigma$ @ 3GeV/c, ~3 $\sigma$ @ 4GeV/c

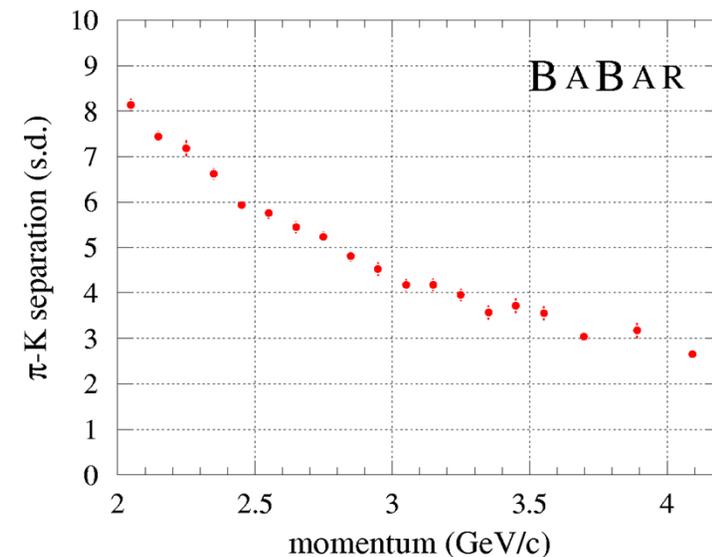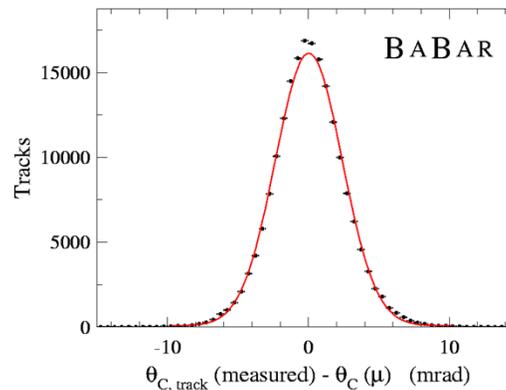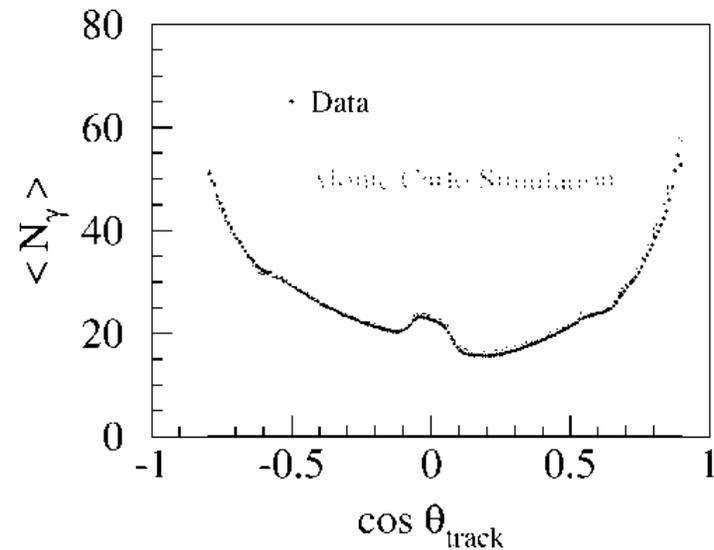

Excellent performance: very reliable, robust, easy to operate,  
significant in almost all BABAR physics results.



As early as 2000 R&D efforts underway to improve future DIRCs.

- Make DIRC less sensitive to background
  - decrease size of expansion volume;
  - use photon detectors with smaller pixels and faster timing;
  - place photon detector inside magnetic field.
- Investigate alternative radiator shapes (plates, disks)
- Push DIRC  $\pi/K$  separation by improving single-photon  $\theta_C$  resolution

BABAR-DIRC Cherenkov angle resolution: 9.6 mrad per photon → 2.4 mrad per track

Limited in BABAR by:


- size of bar image ~4.1 mrad ----->
- size of PMT pixel ~5.5 mrad ----->
- chromaticity ( $n=n(\lambda)$ ) ~5.4 mrad ----->

Could be improved for future DIRCs via:


- focusing optics
- smaller pixel size
- better time resolution

SUPERB,  
BELLE II &  
PANDA

9.6 mrad -----> 4-5 mrad per photon → < 1.5-2 mrad per track




$$N_\sigma \approx \frac{(m_1^2 - m_2^2)}{(2p^2 \sqrt{n^2 - 1} \sigma[\theta_c(\text{tot})])}. \quad (\text{For momenta well above threshold.})$$

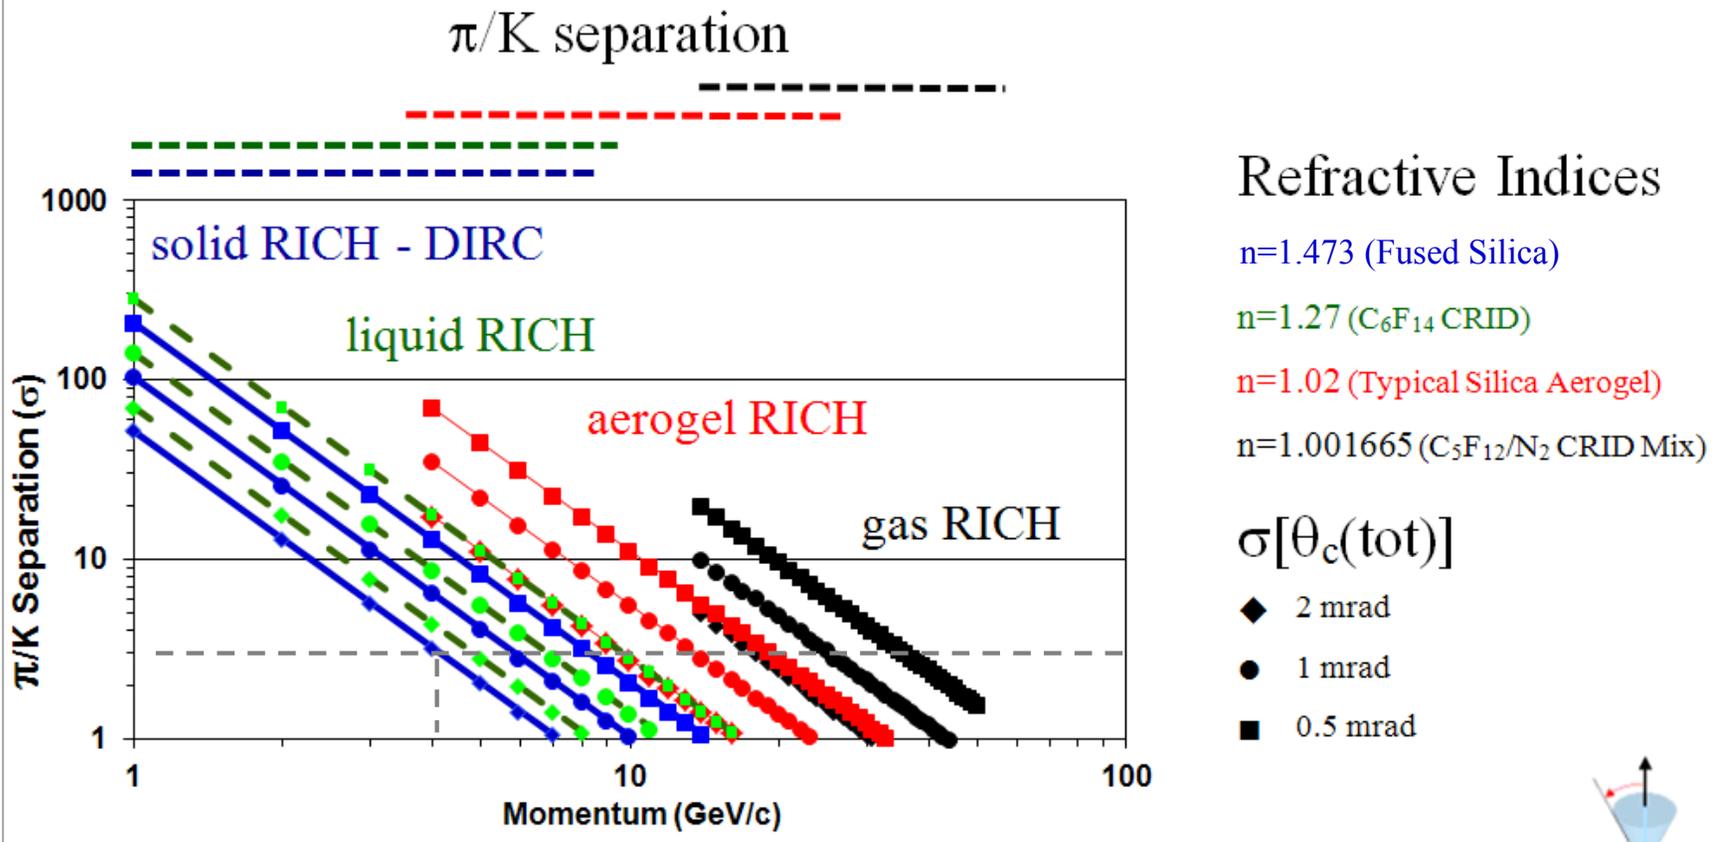

DIRC provides good  $\pi/K$  separation potential significantly beyond 4 GeV/c.  
 Large refractive index limits effective momentum range to below 10 GeV/c.


*based on  
 B. Ratcliff  
 RICH2002*



- Single 3.7m-long BABAR-DIRC bar, compact, oil-filled expansion volume, focusing mirror (CRID), array of H-8500/H-9500 MaPMTs and Planacon 85011 MCP-PMTs, fast readout electronics (both CAMAC and early BLAB).
- Photon yield consistent with BABAR DIRC.
- Demonstrated that the chromatic error of  $\theta_C$  can be corrected using fast timing. (Shown at RICH 2007.)
- Single-photon  $\theta_C$  resolution 5.5 – 7 mrad after chromatic correction for long paths (consistent with G4 simulation).
- **Successful proof of principle for Focusing DIRC.**
- **Basis for SuperB FDIRC design.**



*J. Benitez, I. Bedajane, D.W.G.S. Leith, G. Mazaheri,  
B. Ratcliff, K. Suzuki, J. Schwiening, J. Uher,  
L.L. Ruckman, G. Varner, and J. Va'vra,  
SLAC-PUB 12236 & 12803, NIMA 595 (2008) 104*



## Focusing DIRC (FDIRC):

Intended as barrel PID system for SuperB detector in Italy.

Important constraint:

BABAR DIRC bar boxes to be reused, readout outside magnetic field.


Expected much higher backgrounds at  $10^{36}/\text{cm}^2 \cdot \text{s}$  (100 times BABAR luminosity)


→ decrease size of expansion volume (main source of background in BABAR DIRC).

Design based on R&D at SLAC; **new optics** (replace tank with 12 cameras) **and electronics**

**Complete redesign of the photon camera** (SLAC-PUB-14282)

- True 3D imaging using:
  - 25× smaller volume of the photon camera
  - 10× better timing resolution to detect single photons
- Optical design based entirely on solid fused silica to avoid water or oil as optical medium
- Array of MaPMTs (H8500) for photon detection.

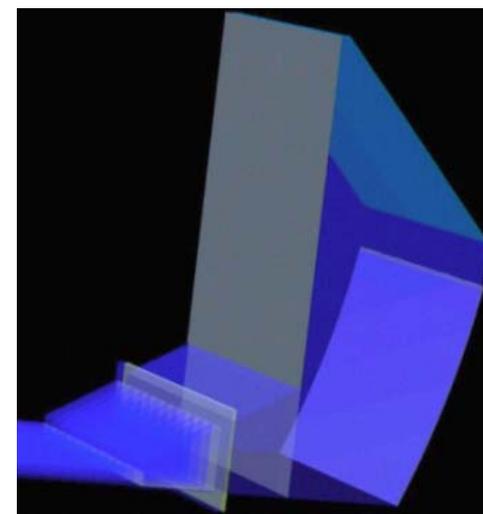



➤ D. Roberts, Mon 18:35

In spite of unfortunate fate of SuperB project,

FDIRC R&D still ongoing.


Prototype in cosmic ray telescope (CRT) at SLAC.


Complete BABAR-DIRC bar box (12 4.9m-long bars)  
with new optics attached.

New readout electronics, fast start counter.

3D tracking of hardened cosmic muons ( $> 2\text{GeV}/c$ ).


Improved simulation and reconstruction to deal with  
focusing & planar mirrors and with complex  
photon reflection paths in camera block.

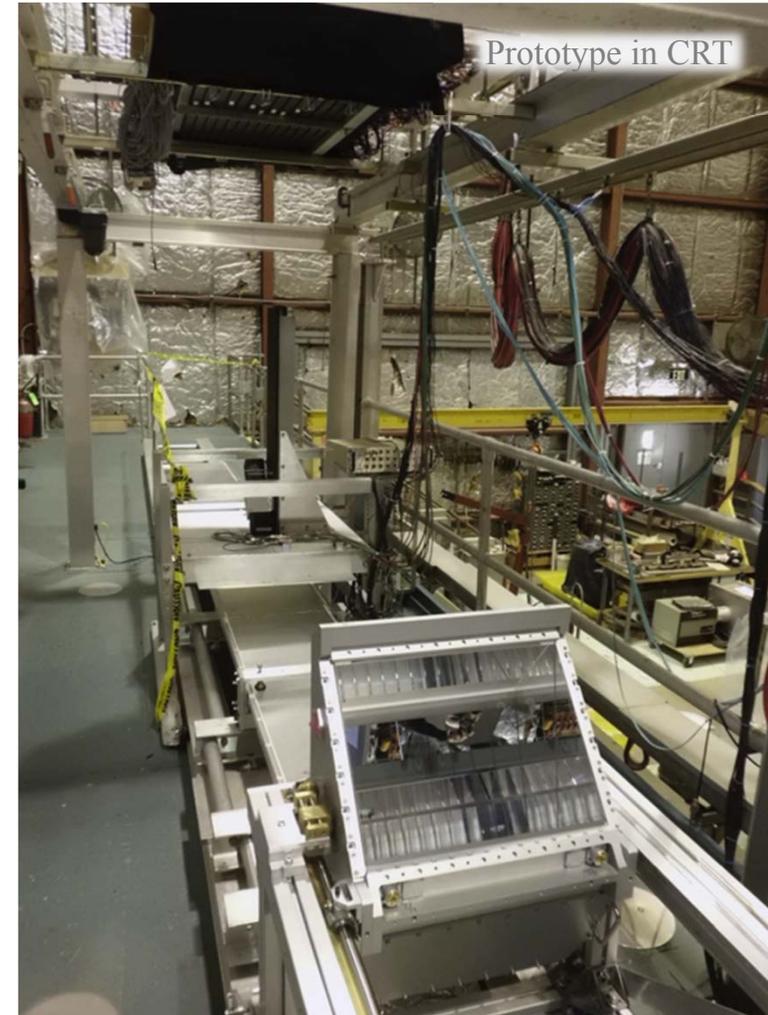




# FDIRC

New photon camera is added to BABAR bar box

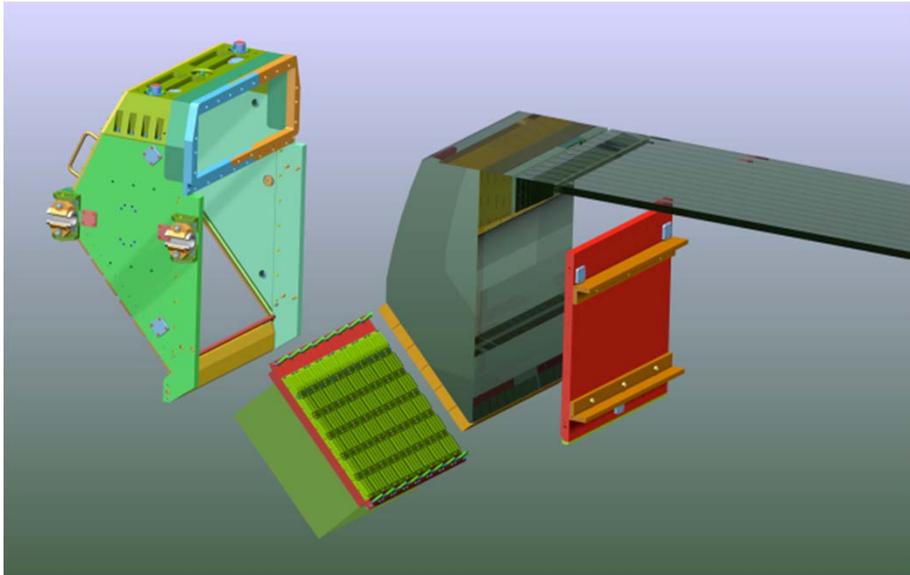

New photon camera

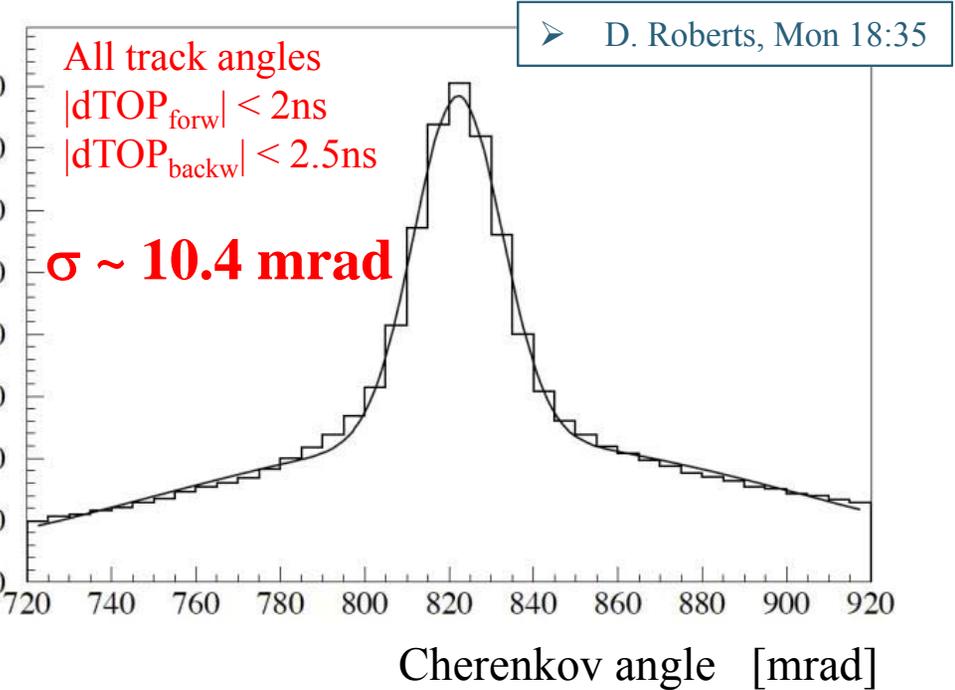


Electronics




Measured Cherenkov angle resolution (10.4mrad) with hard muons ( $>2\text{GeV}$ ) in cosmic ray telescope with 3D tracks and real DIRC bar box.

Slide: J. Va'vra





➤ D. Roberts, Mon 18:35

## Chromatic correction using 3D tracks and real bar box in CRT.

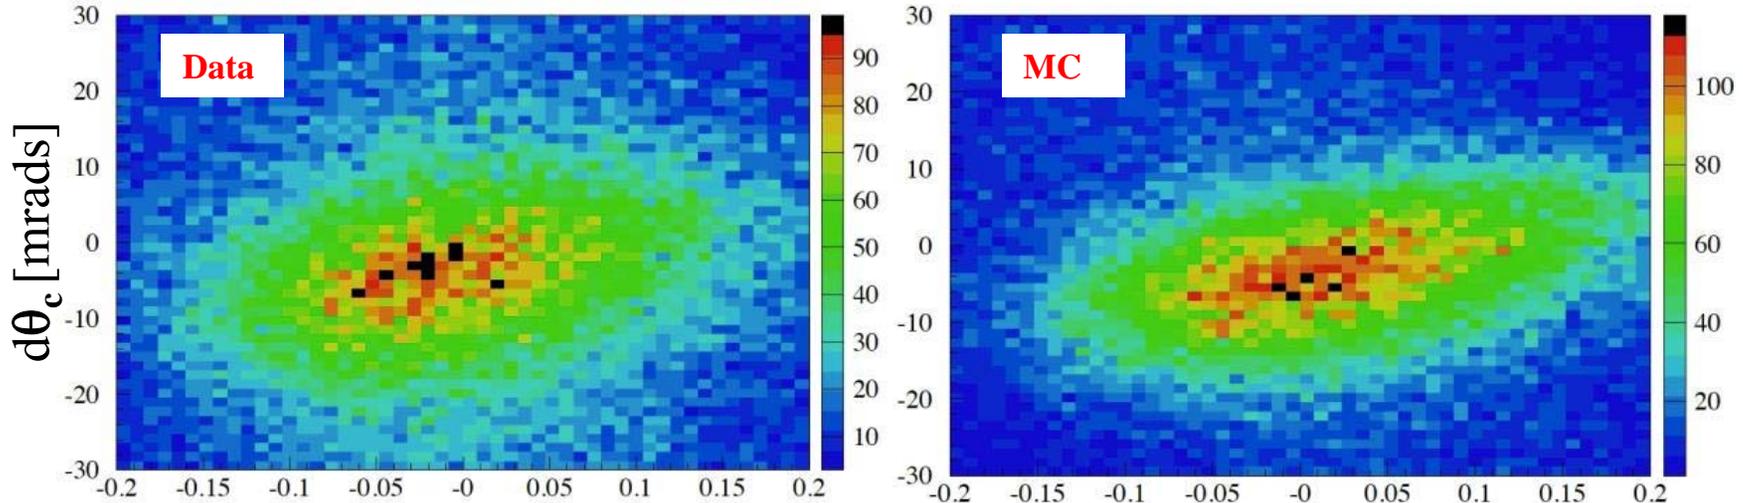

Backward photons,  
long paths

$$dTOP/L_{path} = (TOP_{measured} - TOP_{expected})/L_{path}$$

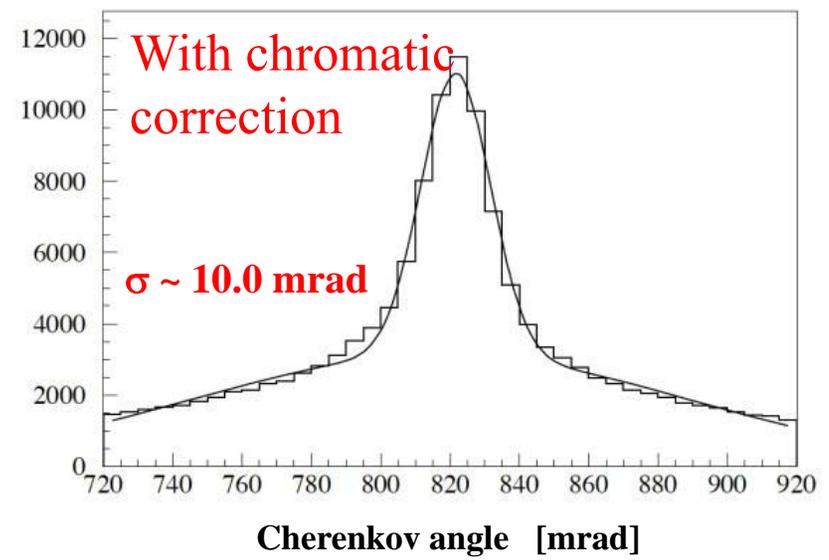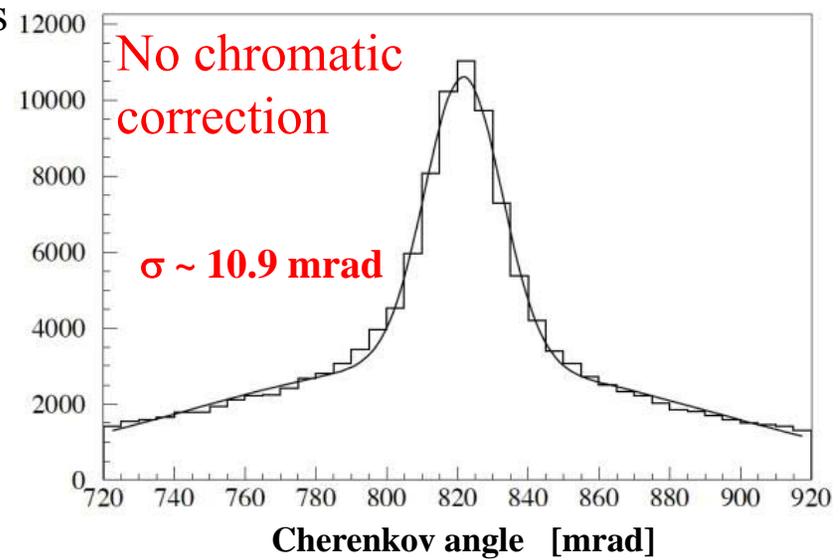

Use correlation from data to correct  $\theta_c$  by time. We gain about  $\sim 0.8$  mrad. MC expects a gain of  $\sim 1$  mrad. We hope to further improve this correction by improving timing resolution.

Slide: J. Va'vra



## PANDA: two DIRC detectors

- Barrel DIRC

PID goal:  $3\sigma$   $\pi/K$  separation for  $p < 3.5$  GeV/c.

➤ M. Hoek, Mon 11:20


- Endcap Disk DIRC

PID goal:  $3\sigma$   $\pi/K$  separation for  $p < 4$  GeV/c.

➤ O. Merle, Mon 17:00


PANDA detector environment:

- very limited space in barrel and endcap,  
EM calorimeters just outside both DIRCs.
- trigger-less DAQ with average interaction rate 20MHz.

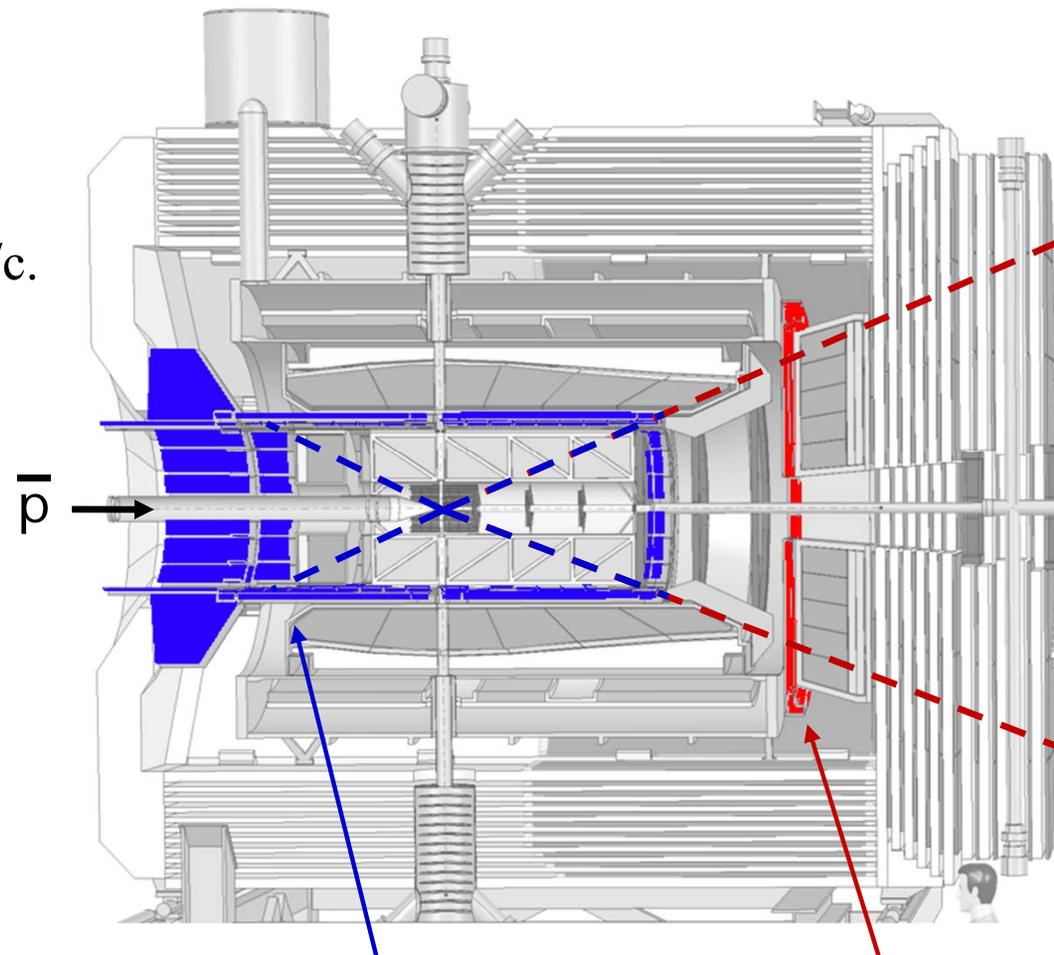

Barrel DIRC  
(22° - 140°)


Endcap Disk DIRC  
(5° - 22°)



➤ M. Hoek, Mon 11:20

**Baseline design:** based on BABAR DIRC with key improvements


- Barrel radius  $\sim 48$  cm; expansion volume depth: 30 cm.
- 80 narrow radiator bars, synthetic fused silica  
17mm (T)  $\times$  32mm (W)  $\times$  2400mm (L).
- **Focusing optics:** lens system.
- **Compact photon detector:**  
30 cm oil-filled expansion volume  
 $\sim 15,000$  channels of MCP-PMTs  
in 1T B field.
- **Fast photon detection:**  
fast TDC plus ADC (or ToT) electronics.
- **Expected performance:**  
Single photon Cherenkov angle resolution: 8-10 mrad.  
Number of photoelectrons for  $\beta \approx 1$  track: at least 20.

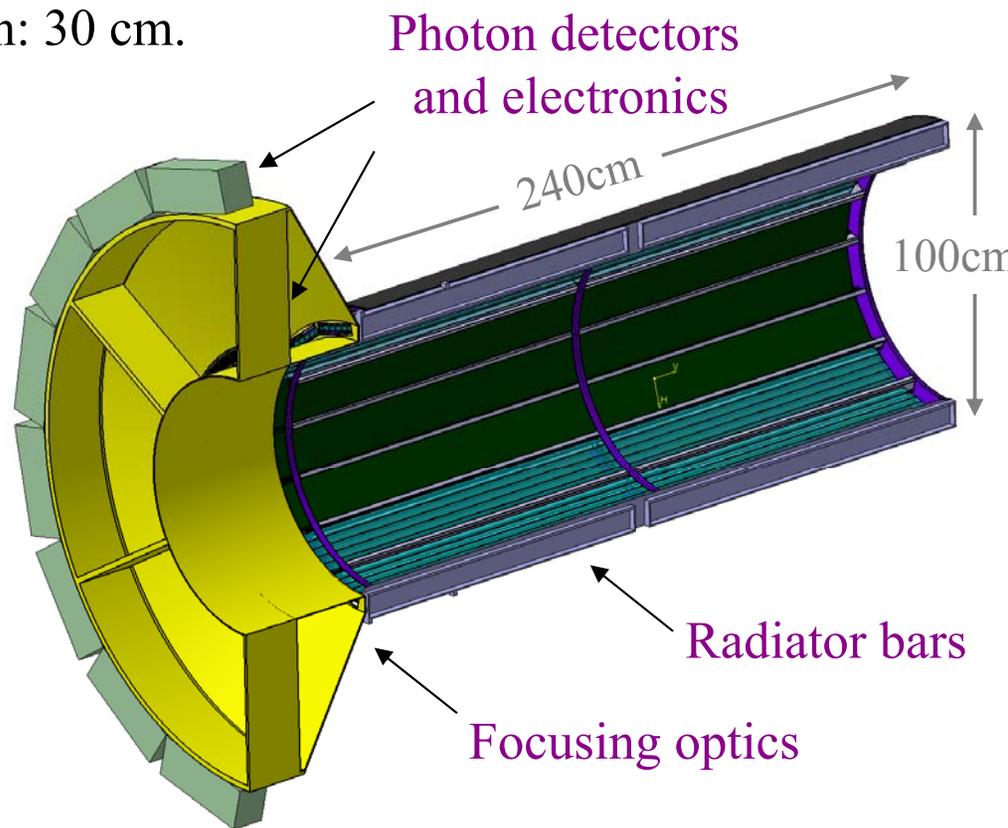

*Finalize design in 2014,  
TDR by end-2014  
Installation in PANDA 2017.*




➤ Posters by R. Dzhygadlo and C. Schwarz

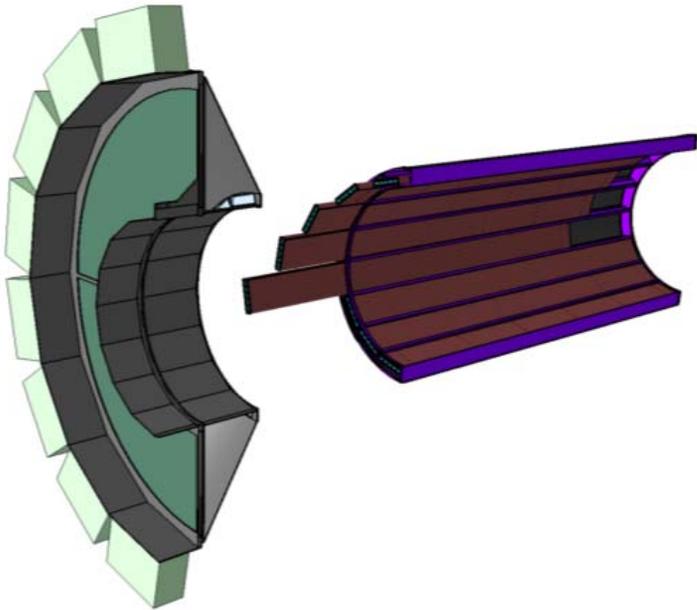

## Modular mechanical design.


Bar boxes slide into slots, can be installed/removed as required (similar to BABAR DIRC).

Expansion volume detaches for access to bar boxes and tracking detectors.

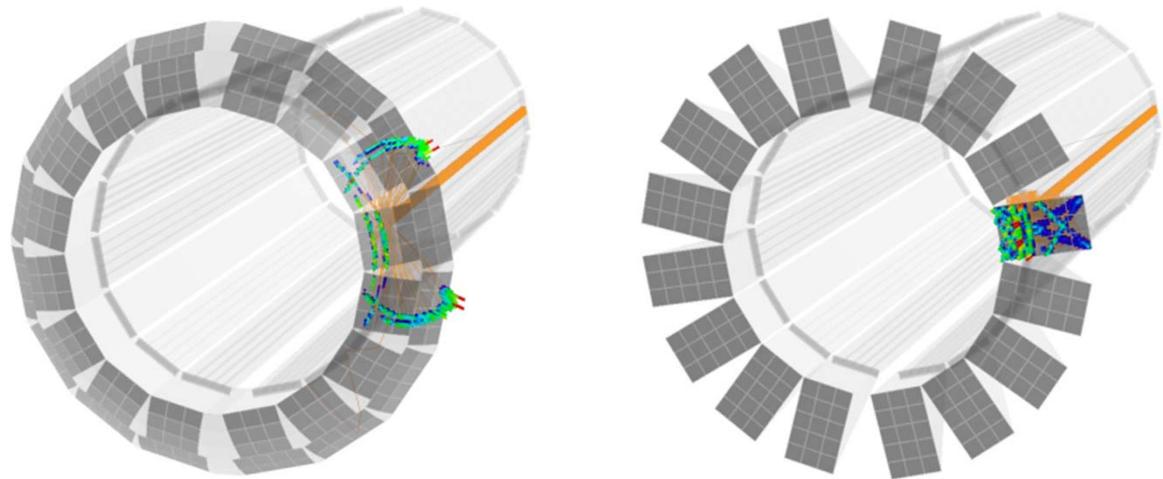

## Still considering several design options

- wide plates (16cm) instead of narrow bars  
→ substantial cost saving potential
- solid fused silica prism instead of oil tank  
→ improved optical quality, easier maintenance
- possible use of small focusing mirror at bar end instead of lens (similar to Belle II TOP)
- curved or inclined focal plane



# PANDA BARREL DIRC

Main technical challenges:

## Production of radiator bars/plates

Notoriously difficult and expensive (see BABAR, Belle II)

→ prototype production (30 pieces so far) with optical companies in Europe, US, Japan.

## Selection of photon detector

Want <100ps single photon timing with high PDE in 1T field

High PANDA interaction rate: ~200kHz/cm<sup>2</sup> hit rate.



→ MCP-PMTs very attractive option.


But: 5C/cm<sup>2</sup> total anode charge over 10 year running (@10<sup>6</sup> gain).

Potential show-stopper at time of last RICH conference.

➤ M. Hoek, Mon 11:20

Prototype bars/plate

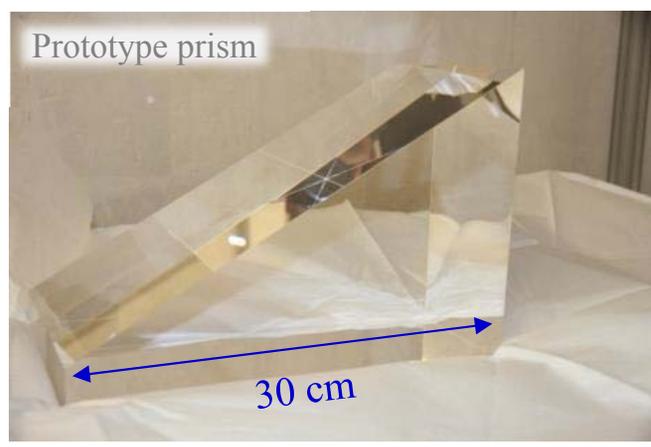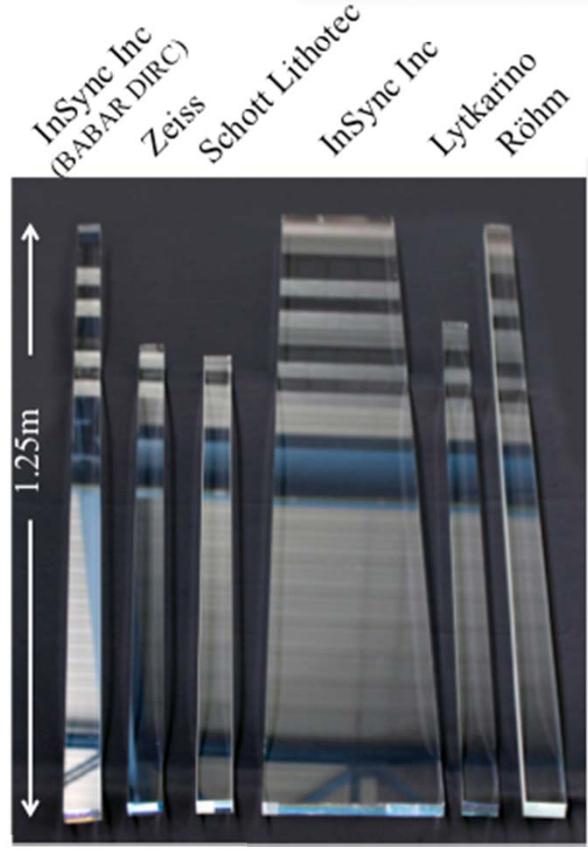





- A. Lehmann, Tue 17:40
- K. Matsuoka, Tue 18:30


Deterioration of photocathode due to ion backflow.

State of the art in 2011: QE drops by 50% after 0.1-0.3C/cm<sup>2</sup> (2-3 months PANDA)

Numerous approaches tried by manufacturers to extending lifetime


- improved vacuum/electron scrubbing;
- improved ceramic/potting;
- thin aluminum foil between MCPs or between photocathode and first MCP;
- special coating on photocathode;
- Atomic Layer Deposition.

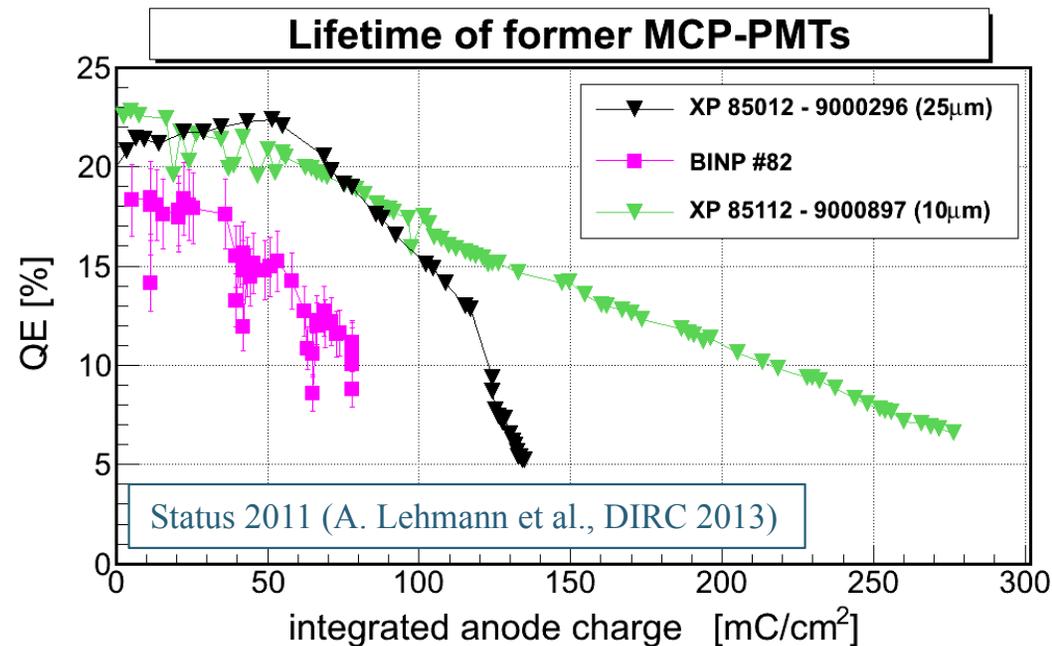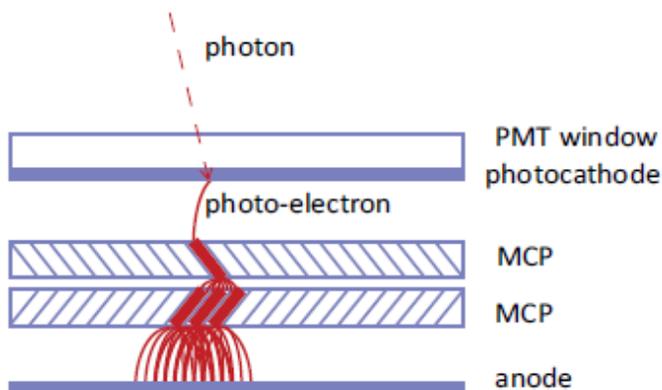




# MCP-PMT AGEING

- A. Lehmann, Tue 17:40
- K. Matsuoka, Tue 18:30

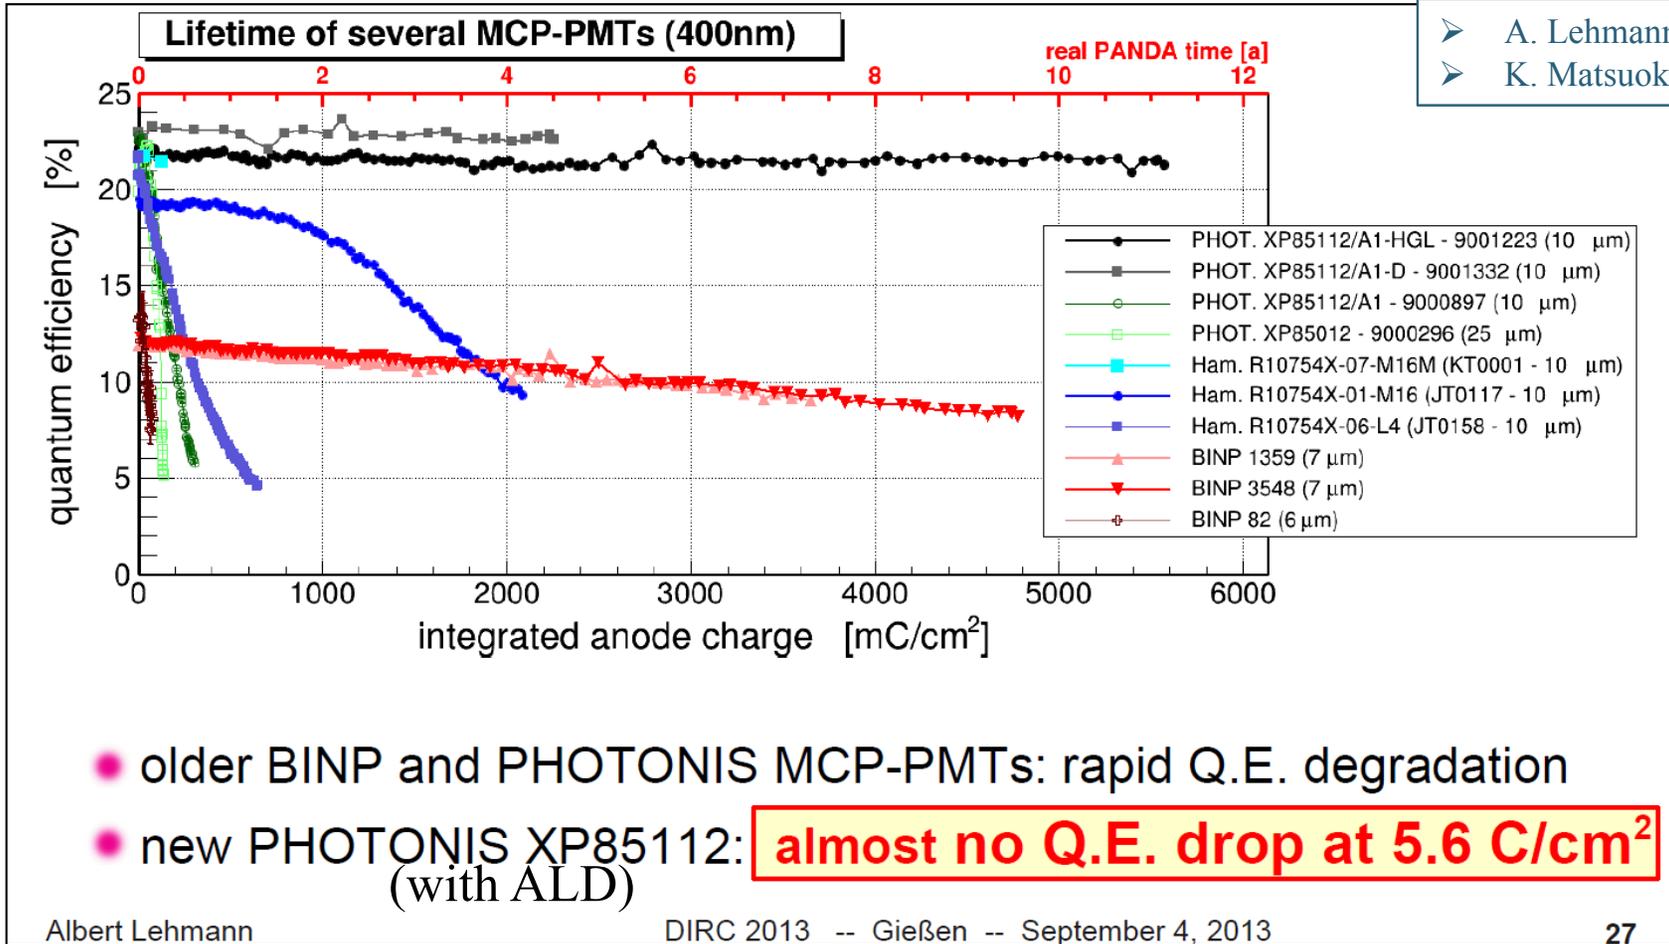



Belle II TOP reporting even longer lifetime for Hamamatsu SL-10 with ALD, lifetime (much) more than **7 C/cm<sup>2</sup>**.


Recent lifetime improvement make **MCP-PMTs** with ALD an excellent sensor choice for PANDA Barrel DIRC and Belle II TOP.



# PANDA BARREL DIRC

Prototype in 2012 CERN testbeam

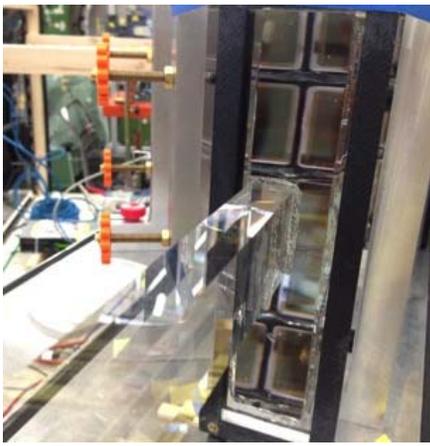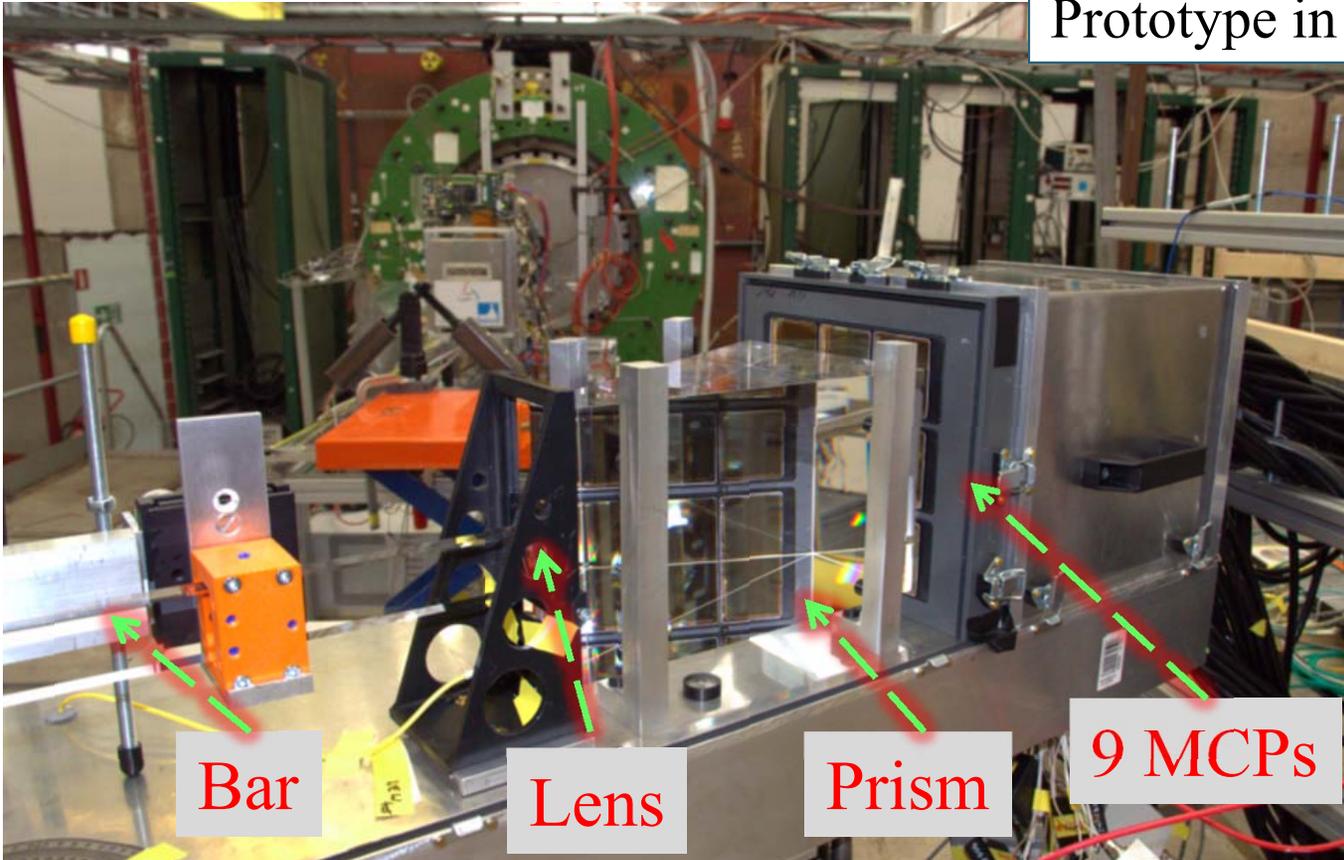



# PANDA BARREL DIRC



➤ M. Hoek, Mon 11:20


Detailed analysis of 2012 CERN data continuing, still preparing 3D tracking and improved timing/position calibration, plate reconstruction still in preparation.

## Preliminary performance example:

InSync bar, simple spherical lens with UV A/R coating and 2.2mm air gap.

→ Clear Cherenkov signal with reasonable single photon resolution.

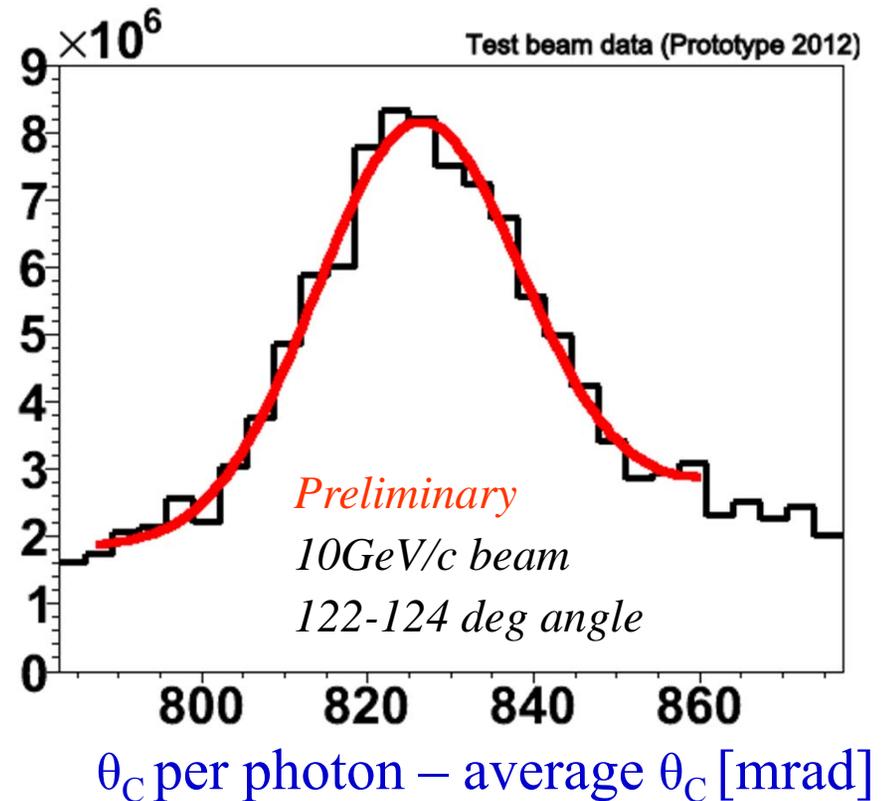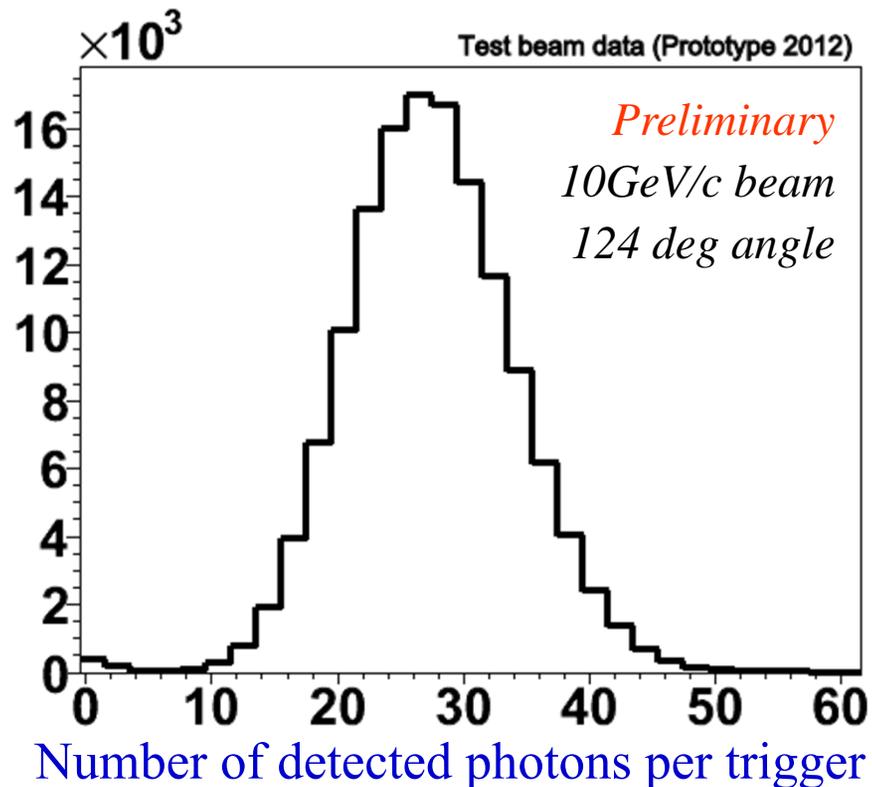




➤ K. Inami, Mon 10:55

## Belle II TOP for barrel PID

PID goal:  $3\sigma$   $\pi/K$  separation for  $p < 4$  GeV/c

DIRC-type RICH with emphasis on fast timing.

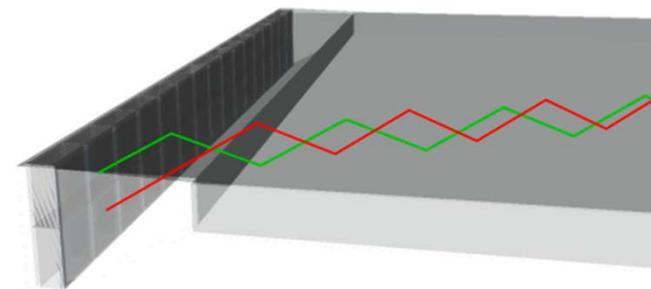


Radiator: fused silica plate 45cm wide, 2cm thick, 250cm long.

TOP barrel formed by 16 plates.

Small expansion volume (10cm depth).


Photon detector: array of 32 Hamamatsu SL-10 MCP-PMTs per sector, 512 in total.

Readout: IRSx waveform sampling ASIC.

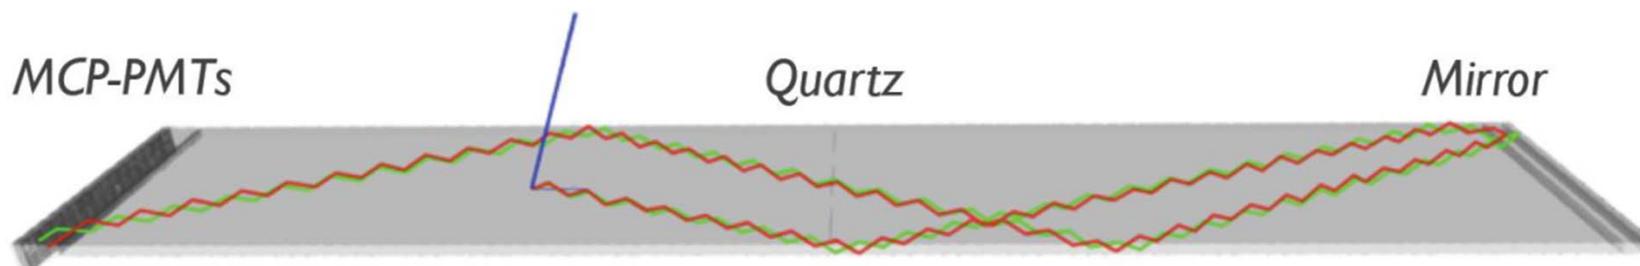

Example of Cherenkov-photon paths for 2 GeV/c  $\pi^\pm$  and  $K^\pm$ .

P. Krizan, DIRC2013 Workshop




➤ K. Inami, Mon 10:55


## Ring image of TOP counter

### Ring image animation


※A ring image has high sensitivity to incident position and angles of particles.

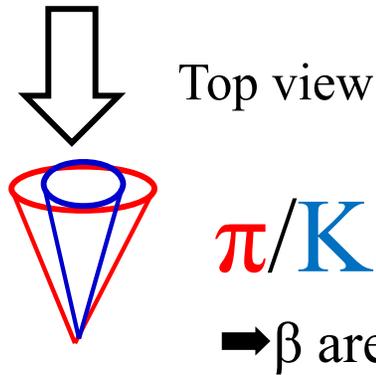

$$\cos\theta_c = \frac{1}{n\beta}$$

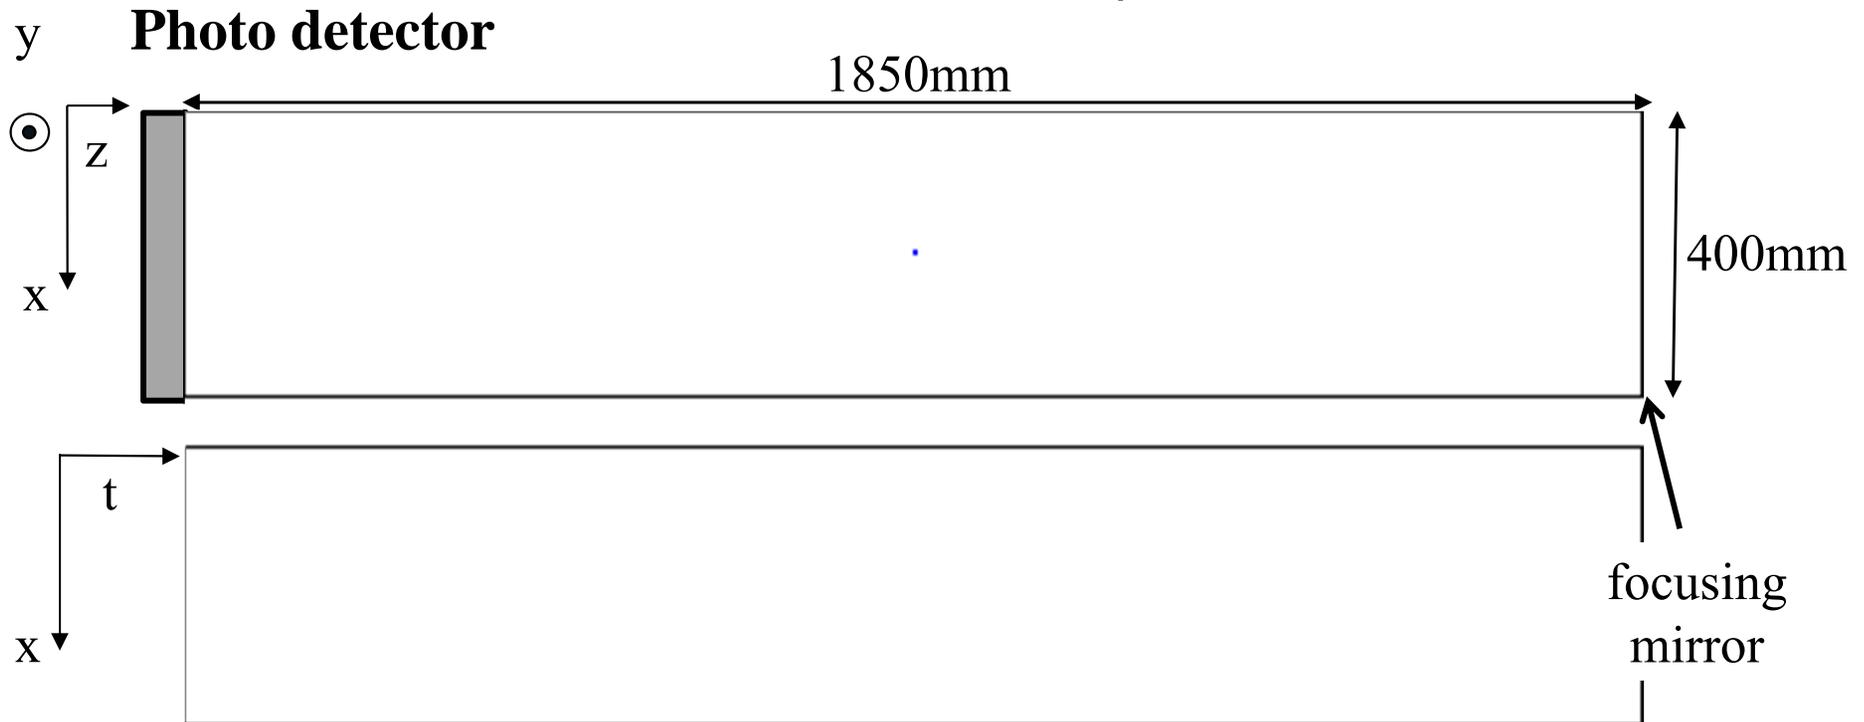




→||←  $\sim 200\text{ps}$  Time and position for detected photons



➤ K. Inami, Mon 10:55


## TOP counter

- Measure the hit timing of  $\sim 20$  Cherenkov photons.
- Hit timing difference between 3 GeV/c K and  $\pi$ 
  - $\Delta\text{TOF} \sim 50$  ps/m
  - $\Delta\text{TOP} \sim 75$  ps/m

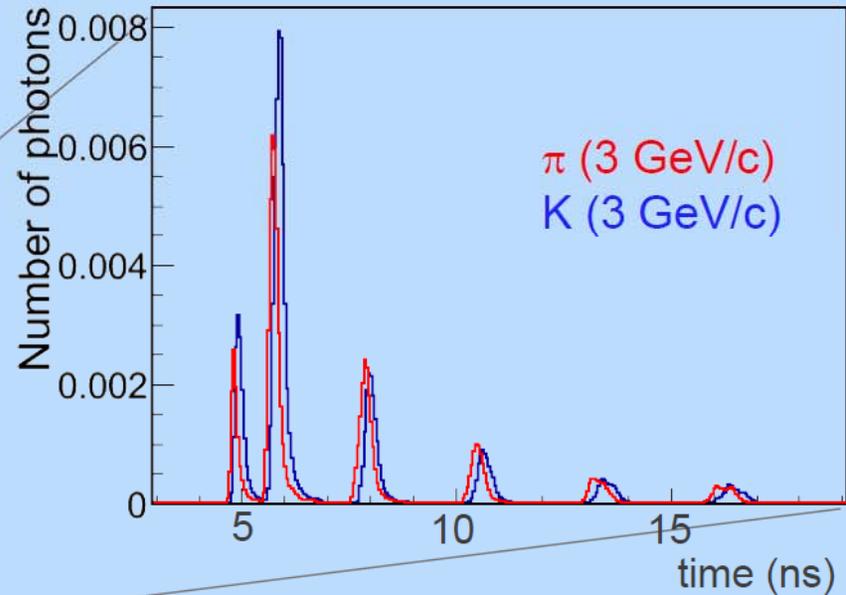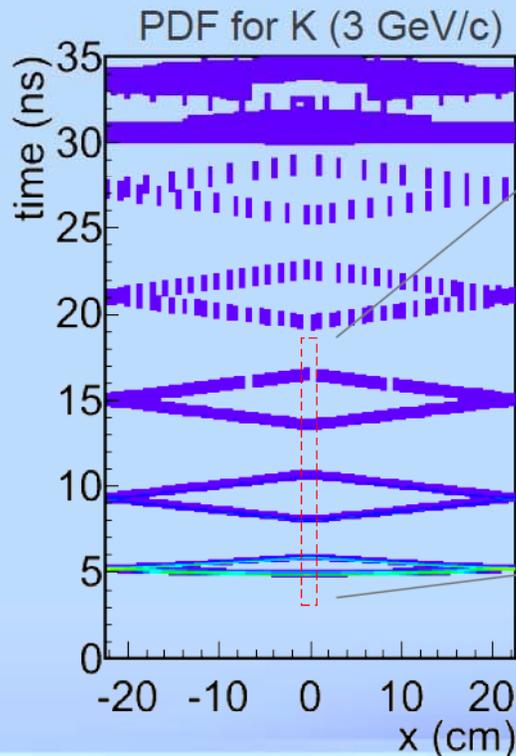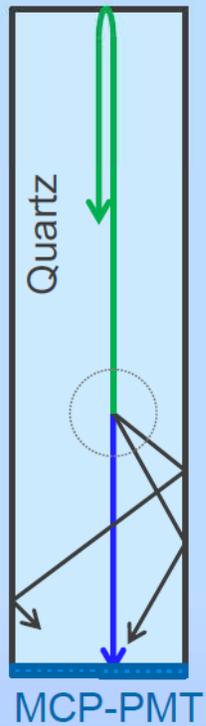

To distinguish K/ $\pi$ , the 'ring' image has to propagate undistorted along the bar and measured with good timing resolution ( $\sim 50$  ps).

K. Matsuoka, VCI2013





TOP prototype at LEPS SPRING8 in 2013

➤ K. Inami, Mon 10:55

## TOP image

Pattern in the coordinate-time space ('ring') – different for kaons and pions.  
Recorded by the CFD-based read-out.

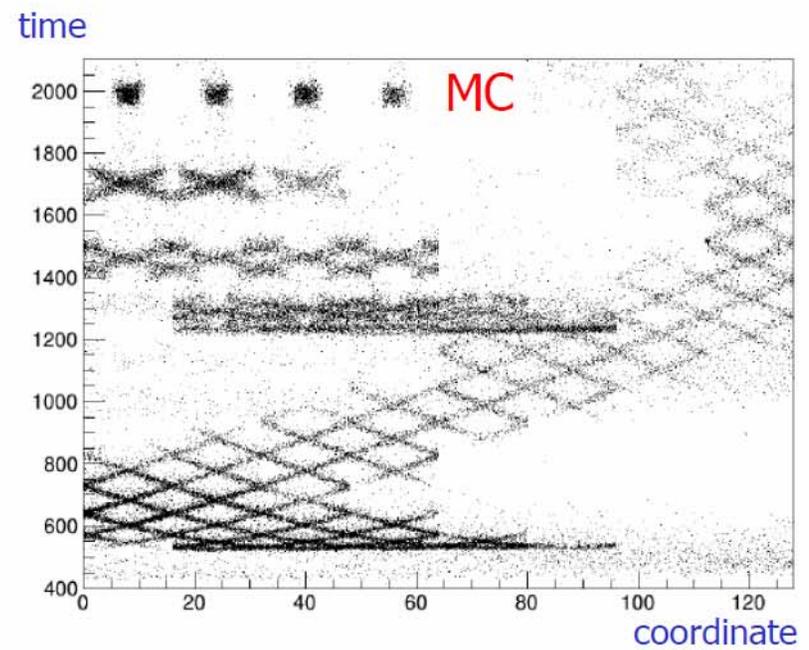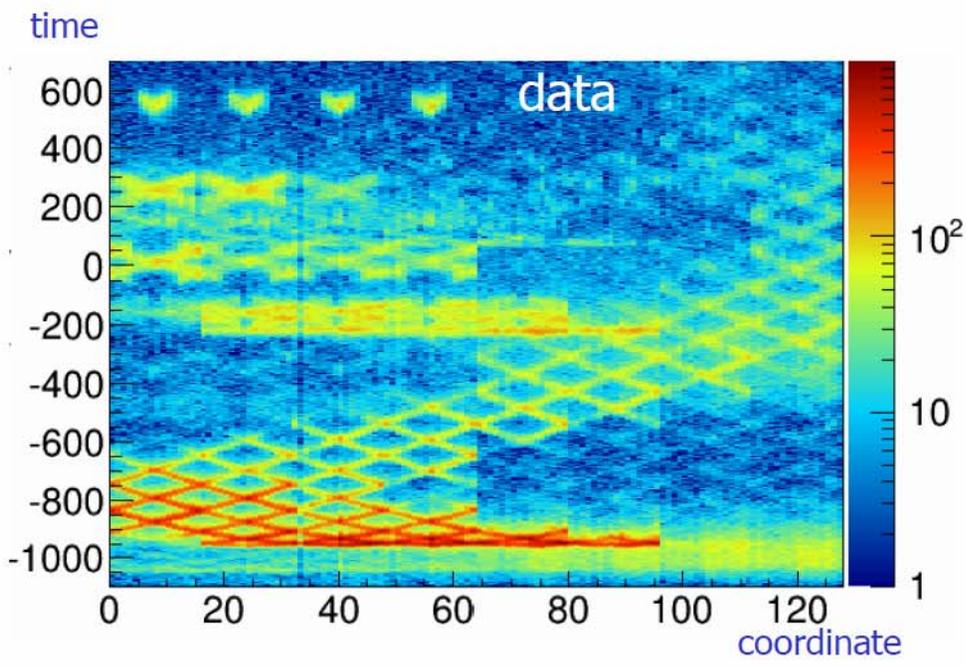

Excellent agreement between beam test data and MC simulated patterns.

P. Krizan, DIRC2013 Workshop


→ Y. Horii, talk at EPS HEP 2013, M. Barret, talk at DPF2013




# BARREL DIRC LANDSCAPE



**BABAR  
DIRC**




**BELLE II  
TOP**

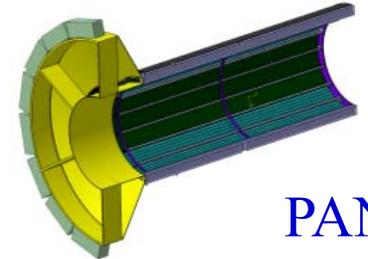

**PANDA  
BARREL DIRC**

Radiator geometry	Narrow bars (35mm)	Wide plates (450mm)	Narrow bars (32mm)
Barrel radius	85cm	115cm	48cm
Bar length	490cm (4×122.5cm)	250cm (2×125cm)	240cm (2×120cm)
Number of long bars	144 (12×12 bars)	16 (16×1 plates)	80 (16×5 bars)
Expansion volume	110cm, ultrapure water	10cm, fused silica	30cm, mineral oil
Focusing	None (pinhole)	Mirror	Lens system
Photon detector	~11k PMTs	~8k MCP-PMT pixels	~15k MCP-PMT pixels
Timing resolution	~1.7ns	<0.1ns	~0.1ns
Pixel size	25mm diameter	5.5mm×5.5mm	6.5mm×6.5mm
PID goal	3 s.d. $\pi/K$ to 4 GeV/c	3 s.d. $\pi/K$ to 4 GeV/c	3 s.d. $\pi/K$ to 3.5 GeV/c
Timeline	1999 - 2008	Installation 2015	Installation 2017/18





# PANDA DISK DIRC

PANDA endcap disk DIRC, PID goal:  $3\sigma$   $\pi/K$  separation for  $p < 4$  GeV/c

➤ O. Merle, Mon 17:00

First DIRC system for small angle forward PID.

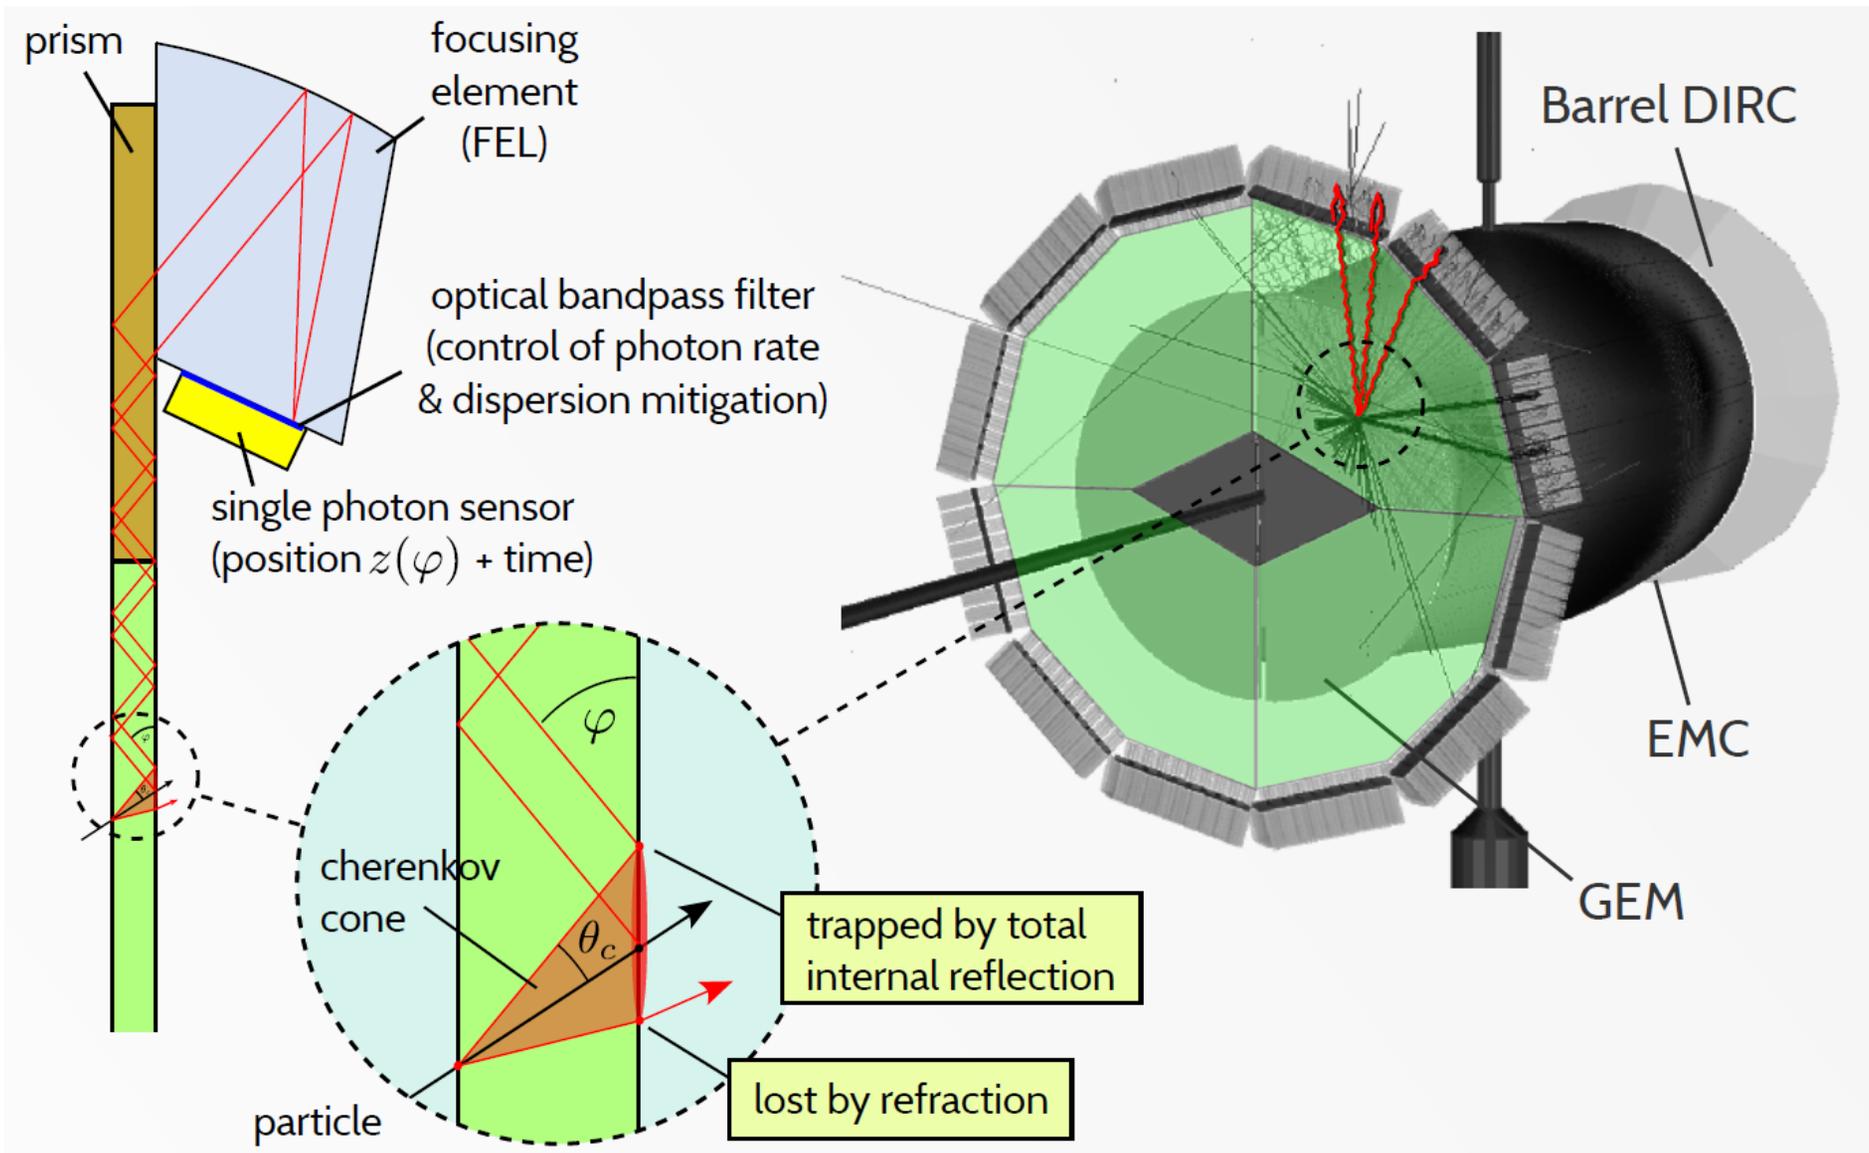

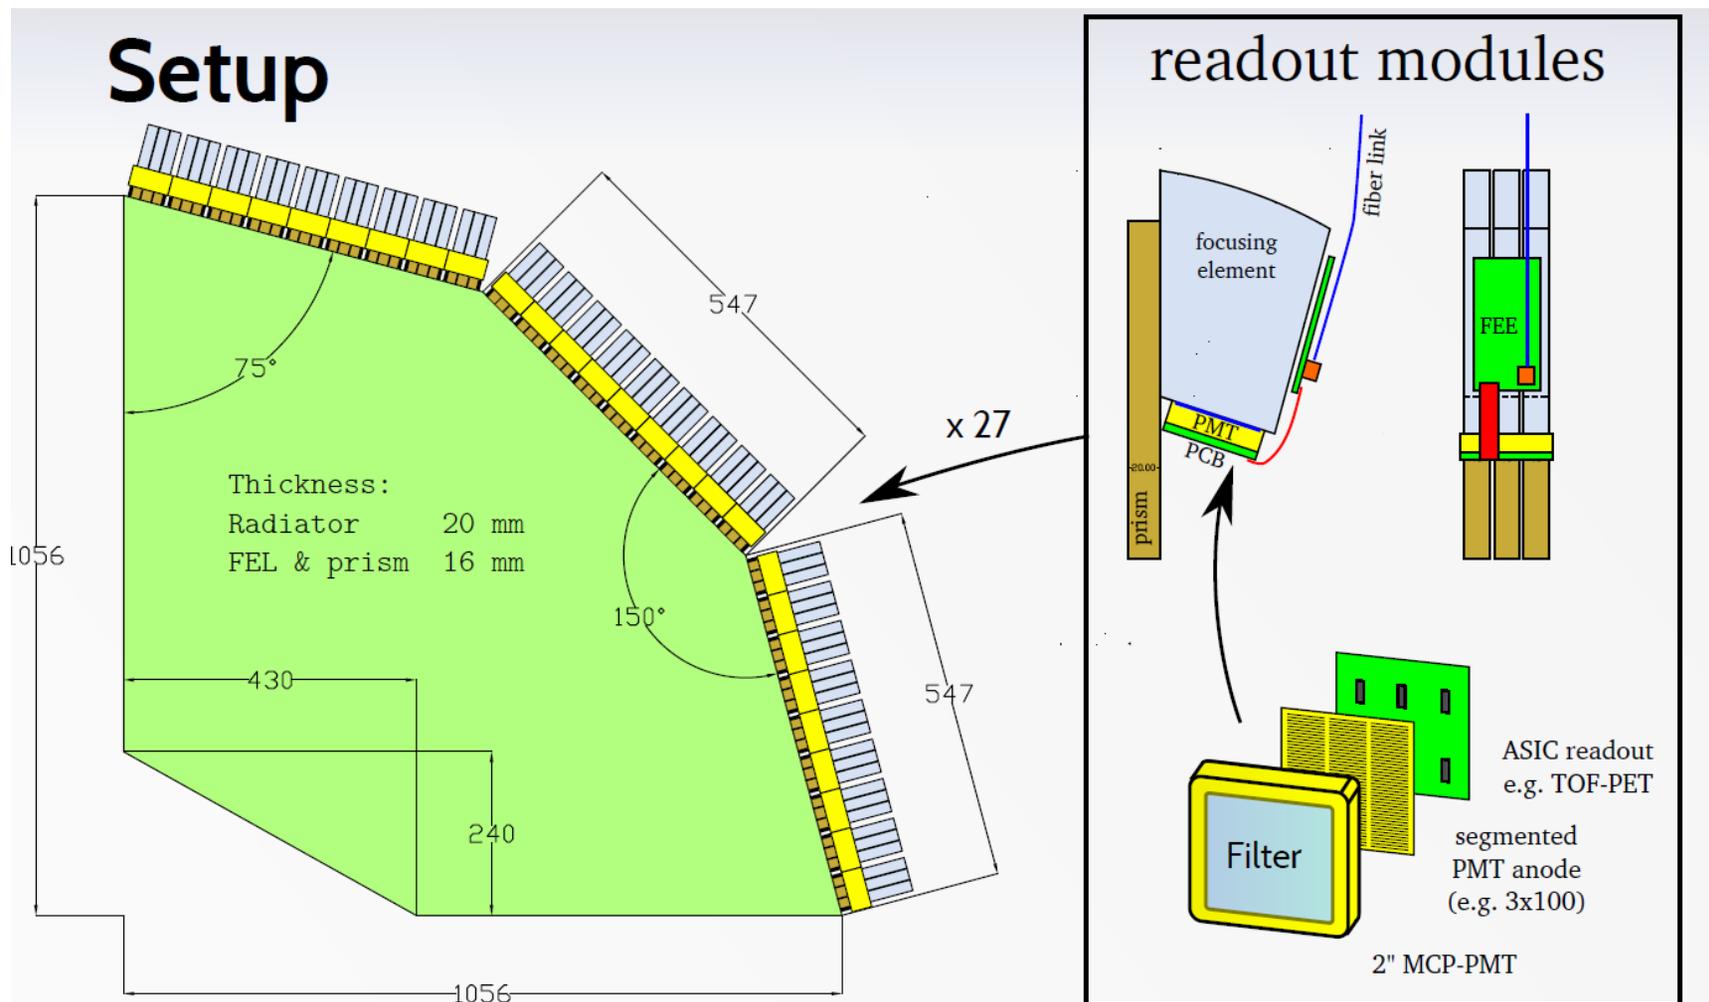


Filter band: 385 nm - 460 nm  $\Rightarrow N_{ph} \approx 16$

Integrated anode charge:  $Q \approx 5.6 \text{ C/cm}^2$   
 Avg. rate:  $225 \text{ kHz/cm}^2$  (19 kHz/ch)  
 Peak data rate per module:  $\sim 0.6 \text{ GBit/s}$

ASIC candidate: TOF-PET (64 ch/die, 100 kHz/ch,  $\sim 6 \text{ mW/ch}$ , 50 ps time-bin, 40 ns dead time)

Enhanced-lifetime MCP-PMT would be OK (will use bandwidth filter to restrict rate)  
 but need fine segmentation (0.5mm pixels, 8 x 128 channel for 2" MCP-PMT)





# PANDA DISK DIRC

➤ O. Merle, Mon 17:00

$\pi/K$  separation at 4 GeV/c for different number of FELs (SiO<sub>2</sub> prism)

2 x 10k tracks/marker, no exp. background  
1 mrad smearing of particle track in  $\theta$  and  $\varphi$   
0.5 mm pixel size, passband: 385 - 460 nm

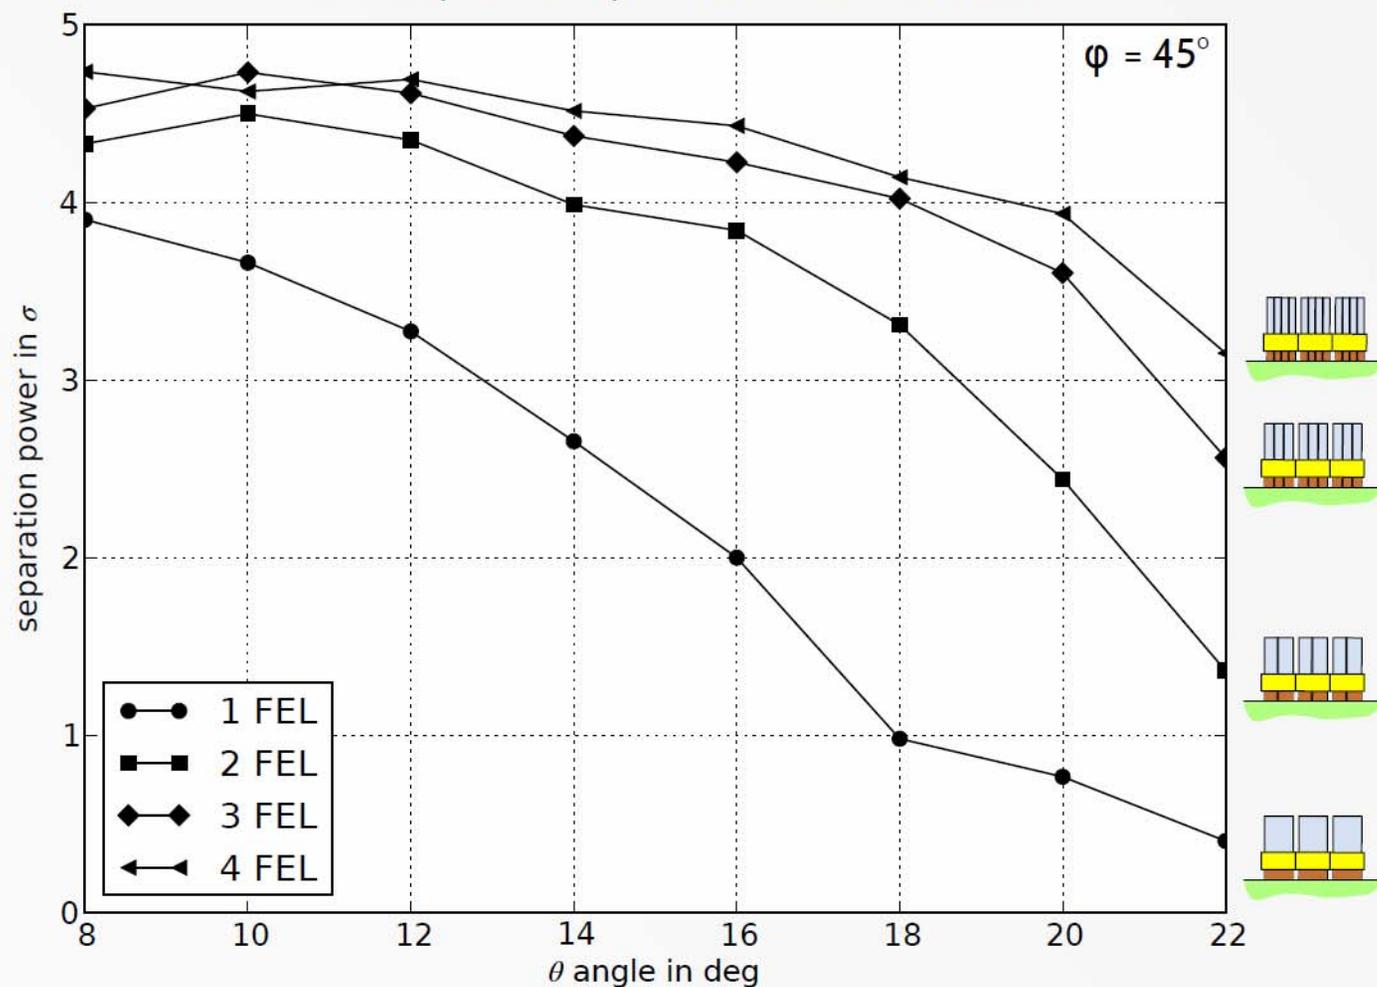



➤ O. Merle, Mon 17:00






Quarter-disk prototype in testbeam  
at CERN and DESY

Track-by-track PID demonstrated.



*Low-cost R&D prototype:  
borosilicate disk,  
PMMA lightguides,  
limited number of channels.*

## Results

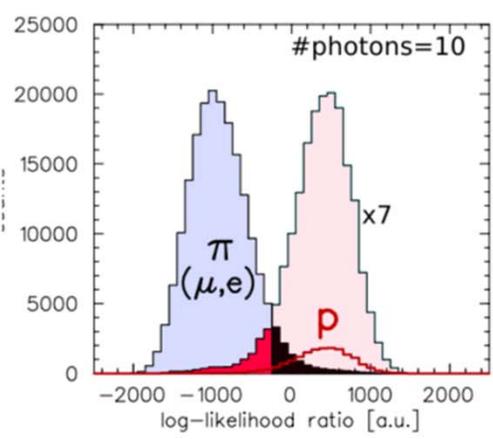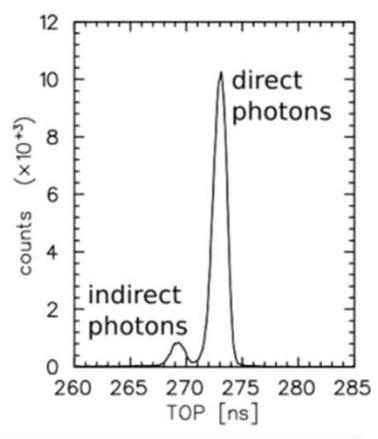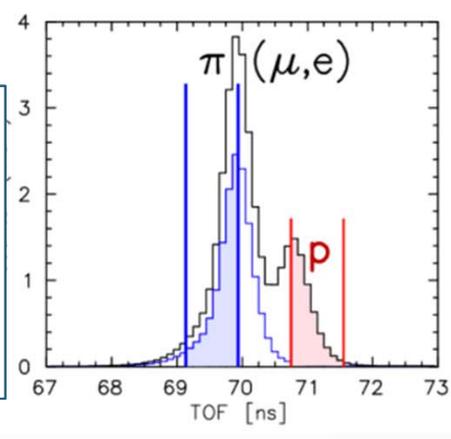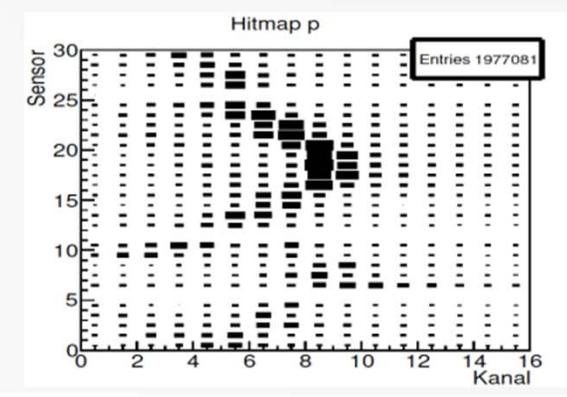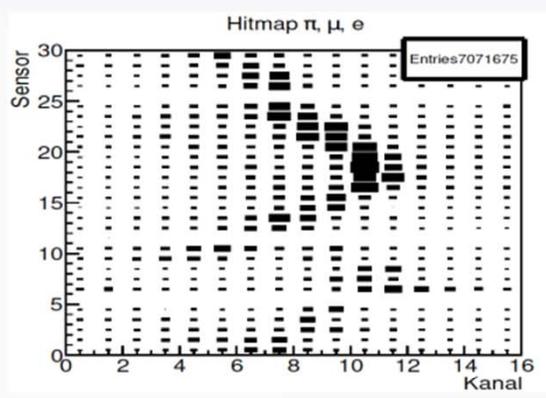

*Validate design with  
high-resolution prototype in 2014;  
TDR by end-2014;  
Installation in PANDA 2017.*









➤ M. van Dijk, Mon 19:00

**TORCH:** R&D project for possible LHCb upgrade:

Particle ID for low/intermediate momentum (2-10 GeV/c)

- Large quartz Cherenkov radiator plate (idealised design) with focusing block on top and bottom
- Photons extracted through total internal reflection
- Pions and kaons are separated in time-of-flight due to slightly different mass
- Precise time-of-flight measurement coupled to momentum information leads to identification
- Goal is to provide  $3\sigma$  pion-kaon separation (needs  $<12.5\text{ps}$  per-track resolution)

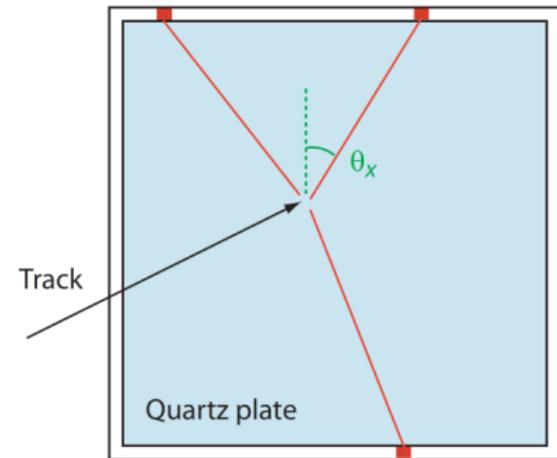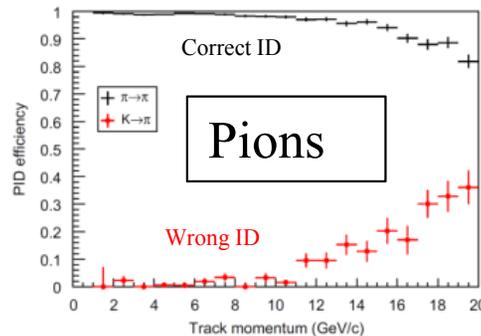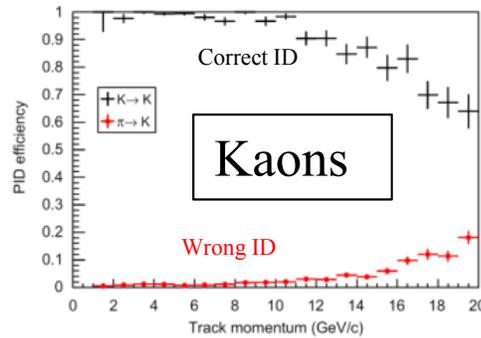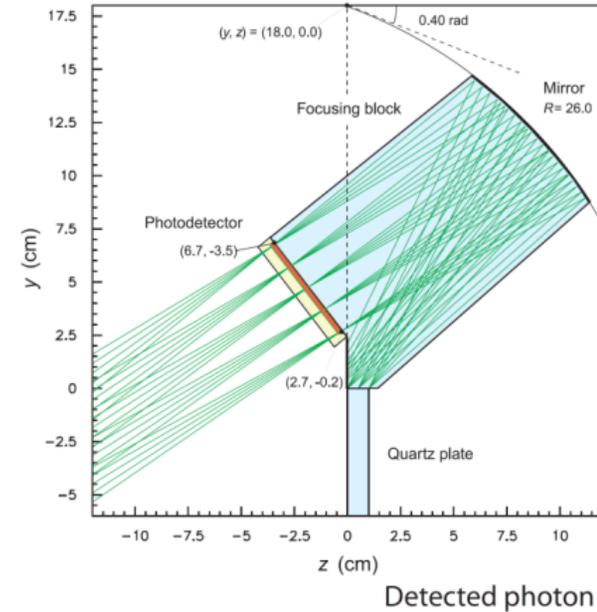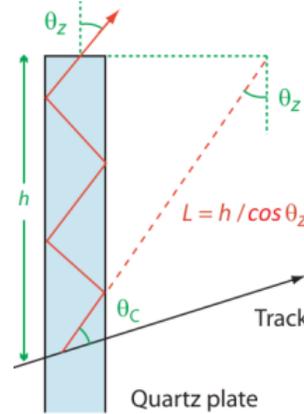





➤ M. van Dijk, Mon 19:00

- Geant simulation of idealised quartz plate and focusing block
- Detector effects to be added in
- Extra (noise) photons detected from secondary tracks (electrons) that also give of Cherenkov radiation
- Width of Cherenkov ring segment due to chromatic dispersion in quartz medium
- Simulation of accumulated photons for a thousand 10 GeV kaons
- R&D cooperation with Photek to develop high-granularity, long-lifetime, close-packing MCP-PMT.




MCP-PMT matches requirement for PANDA Disk DIRC.

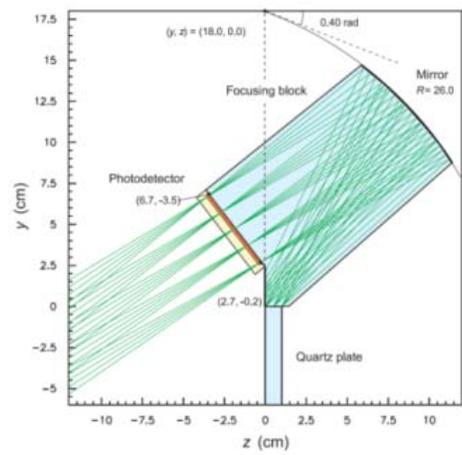

Photons from primary track

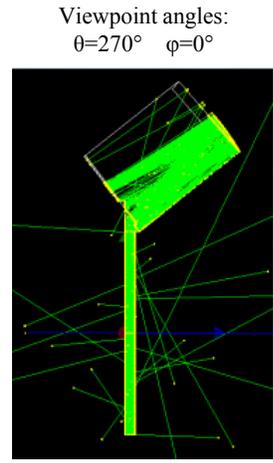

Photons from secondary tracks

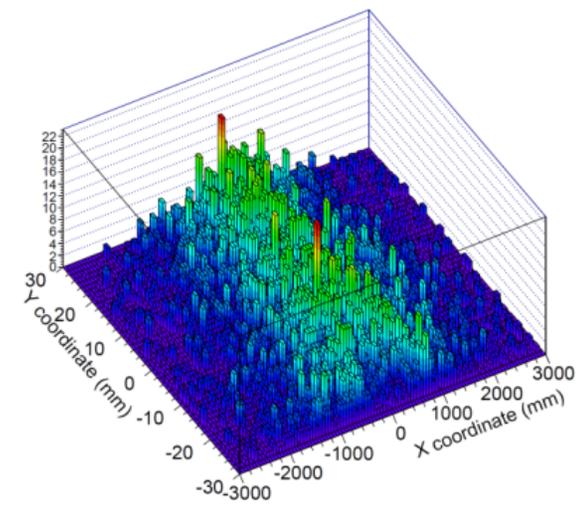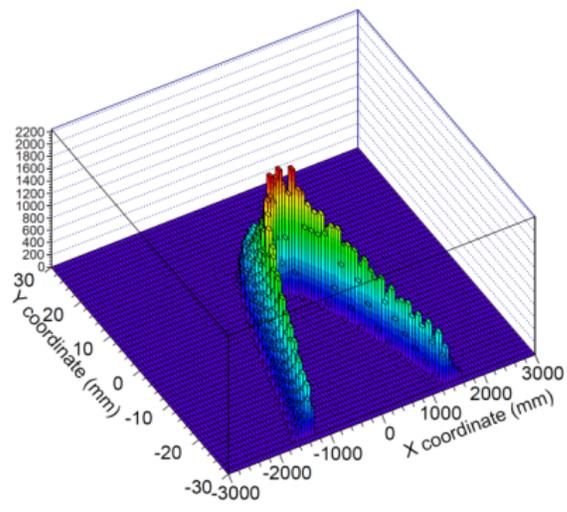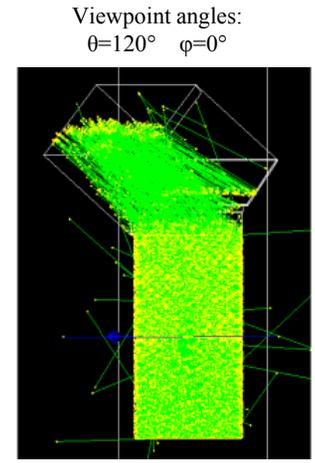



**Recent technology advances crucial for next generation aerogel / fused silica RICHes.**

Aerogel clarity and tile size greatly improve photon yield.

Focusing aerogel configuration due to reliable tuning of aerogel refractive index.


Single photon detectors with fine pixels, fast timing, tolerant of magnetic field and moderate radiation have become available (HAPDs, MCP-PMTs).

Breakthrough lifetime improvement make MCP-PMT with ALD technology sensor of choice for high-rate DIRC-type RICHes.

SiPM (G-APD) are making progress by drastically reducing dark count rate and need for cooling, dSiPM looking promising but not quite there yet.

BABAR-DIRC bars may see second life – TORCH? PANDA? GlueX? ...?






**Time imaging** seemed imminent at RICH in 2010 with Belle II TOP and PANDA Disk DIRC were considering photon detection with only one space coordinate plus very precise timing.


But difficult to control effects of background, alignment, PID less robust – added “Y” pixels.


But technique may be necessary to unfold complicated backgrounds that appear in geometric reconstruction approaches, certainly has potential to further improve performance.

TORCH hit pattern with and without dispersion and reflection off lower edge  
R. Forty, DIRC 2013

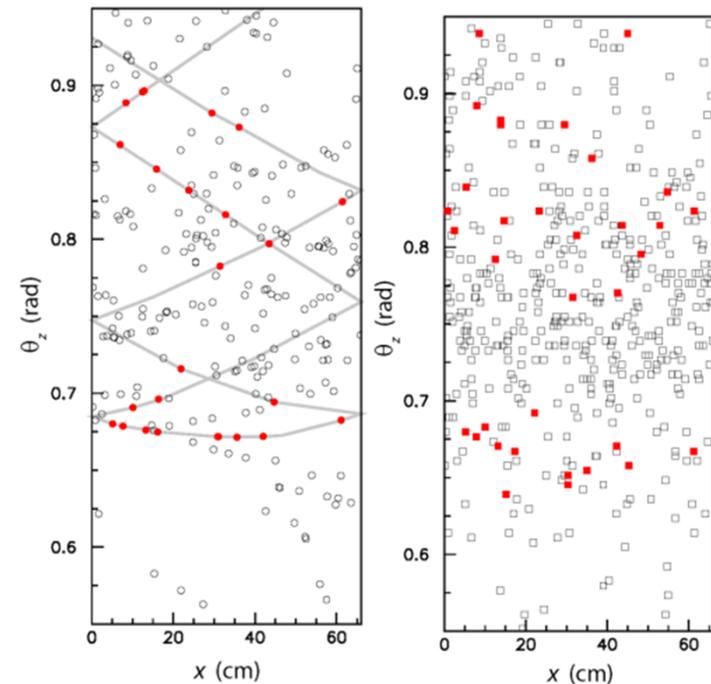

Belle II TOP time PDF, Y. Arita, QFPU 2013

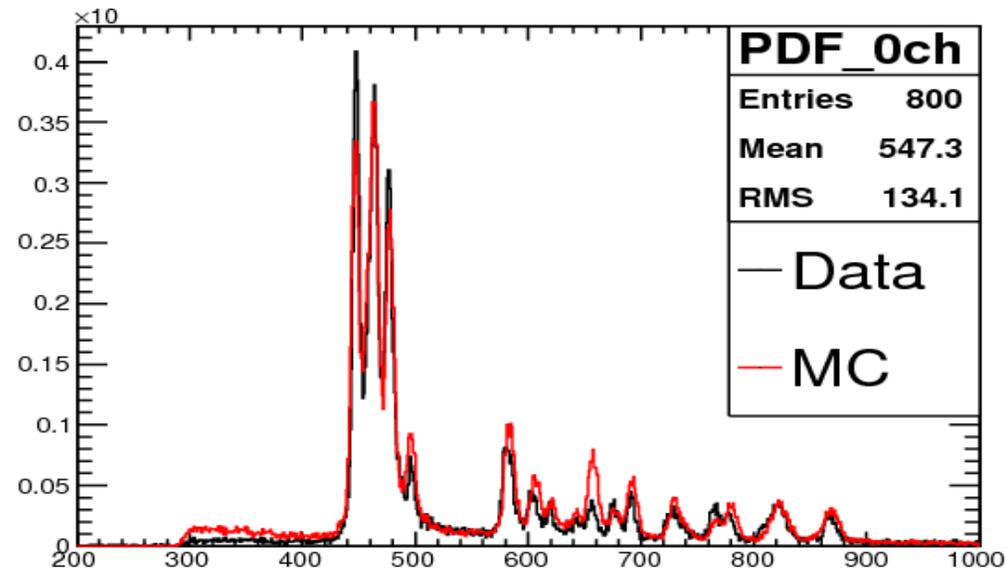





**Time imaging** seemed imminent at RICH in 2010 with Belle II TOP and PANDA Disk DIRC were considering photon detection with only one space coordinate plus very precise timing.

But difficult to control effects of background, alignment, PID less robust – added “Y” pixels.


But technique may be necessary to unfold complicated backgrounds that appear in geometric reconstruction approaches, certainly has potential to further improve performance.


Example: simulated hit patterns in X/Y, X/T, T/Y for 1 GeV/c particles

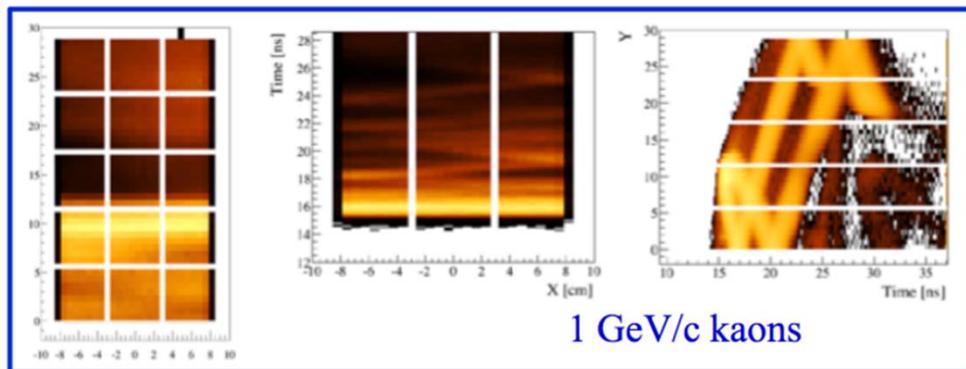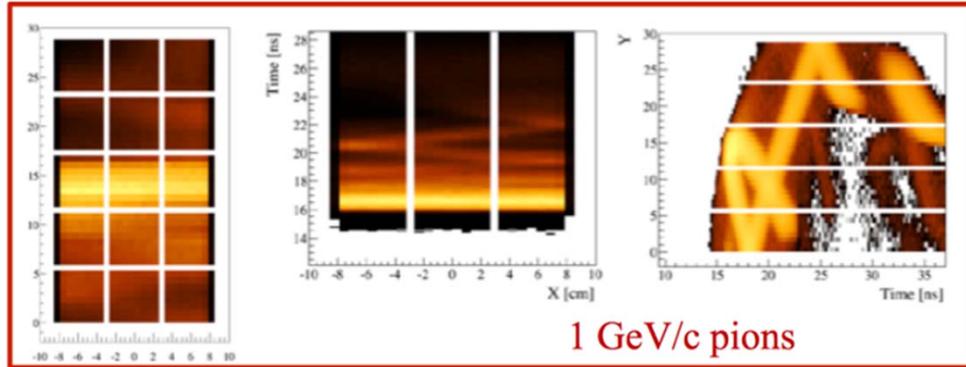

Simulation study for PANDA Barrel DIRC with wide plate geometry suggests that time-based PDFs perform significantly better than pure geometric reconstruction.

PANDA Barrel DIRC hit pattern and PDF, M. Hoek, R. Dzhygadlo, RICH2013

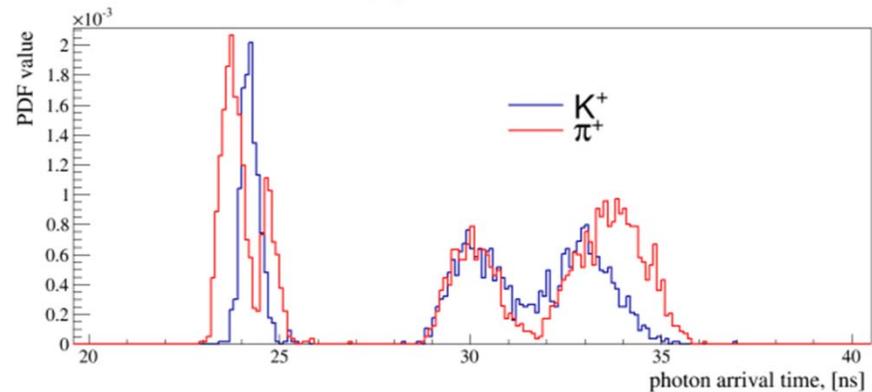




# THANK YOU


Thank you to the organizers.

Thank you to my RICH colleagues for providing material for this talk  
and sorry about skipping so much. *(Additional slides in the appendix.)*


Thank you all for your attention.


Geant simulation of hit pattern in  
PANDA Barrel DIRC.

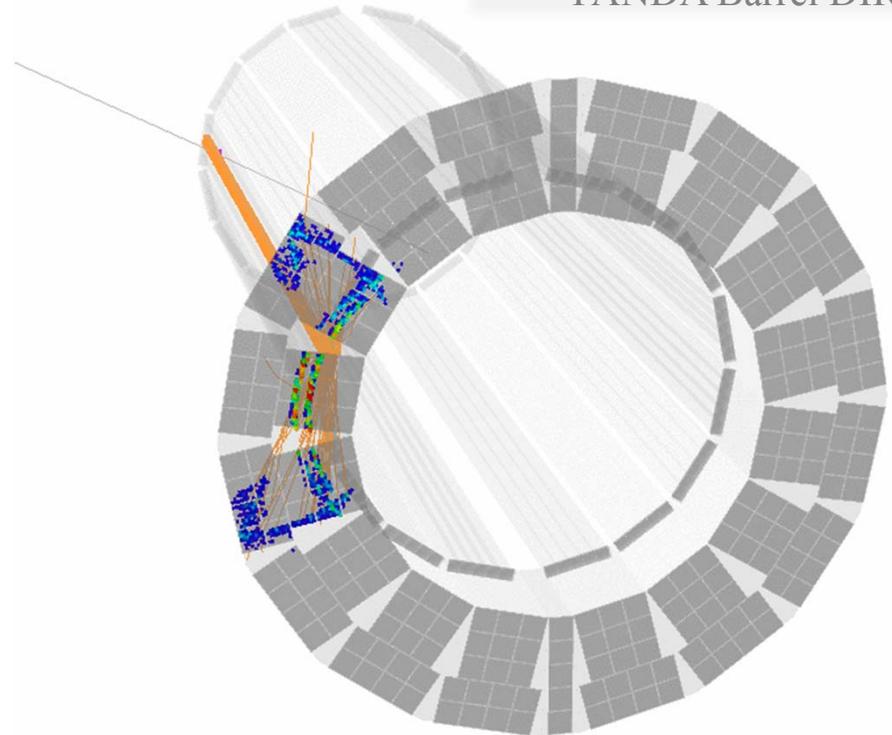




## EXTRA MATERIAL






## The NA62 Experiment at CERN

- NA62 aim at a 10% measurement of the  $BR(K^+ \rightarrow \pi^+ \nu \bar{\nu})$
- Theory:  $BR = (0.85 \pm 0.07) \times 10^{-10}$  (very small th.error!!)
- Present result:  $1.73^{+1.15}_{-1.05} \times 10^{-10}$  (BNL E787/E949)
- Very hard from exp.point of view: one charged track (a pion) and nothing else!!

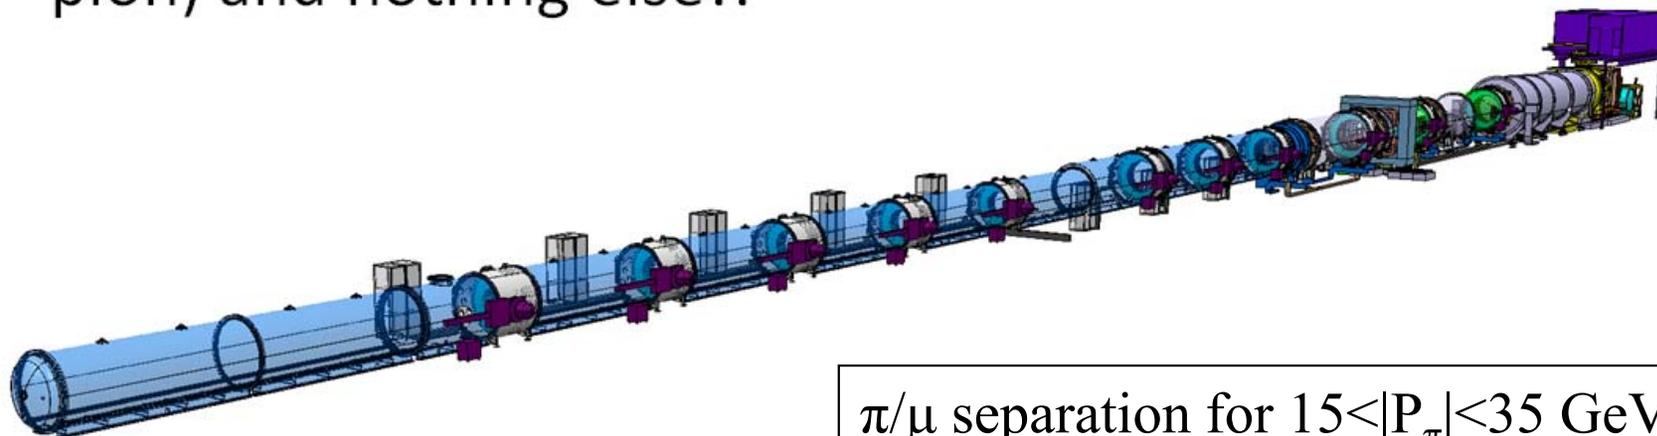

$\pi/\mu$  separation for  $15 < |P_\pi| < 35 \text{ GeV}/c$




## The NA62 RICH Detector



Flanges with  
2 x 1000 PMTs


Length > 17 m;  $\varnothing$  = up to 4m

Mirror mosaic

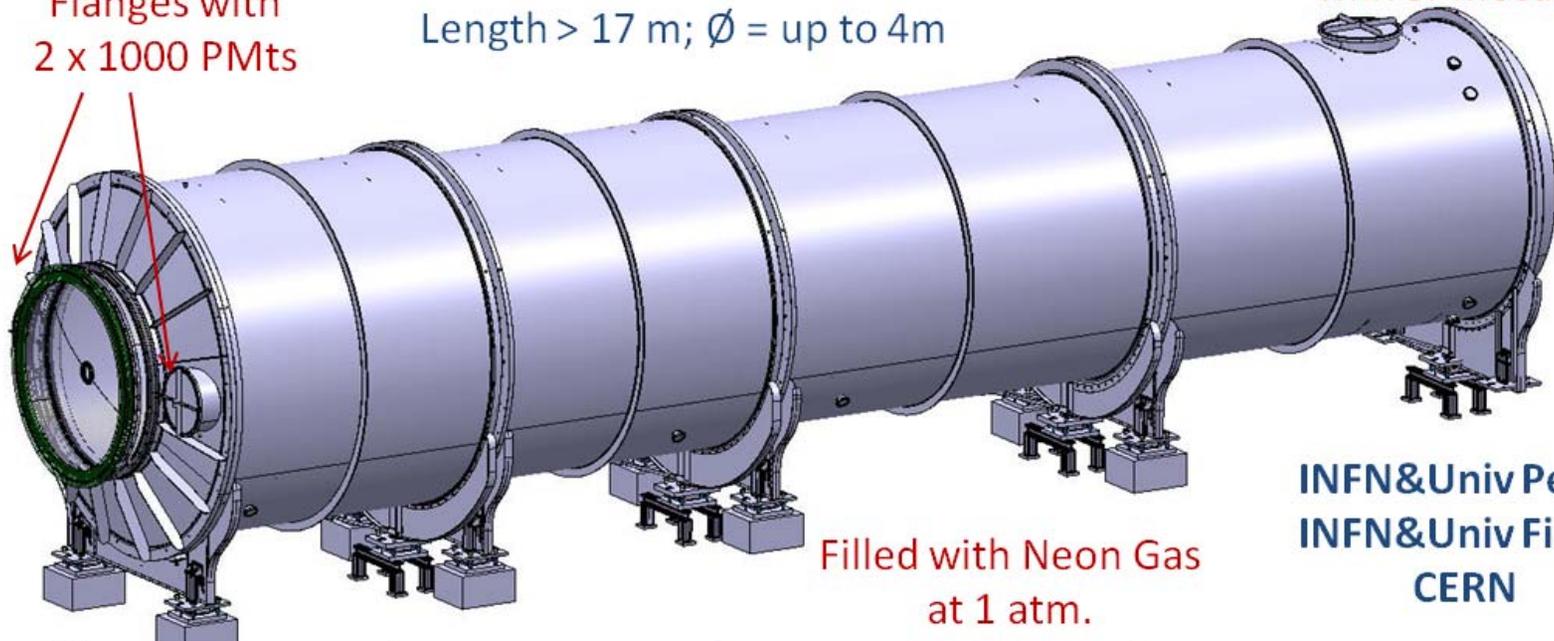

Filled with Neon Gas  
at 1 atm.

INFN&Univ Perugia  
INFN&Univ Firenze  
CERN

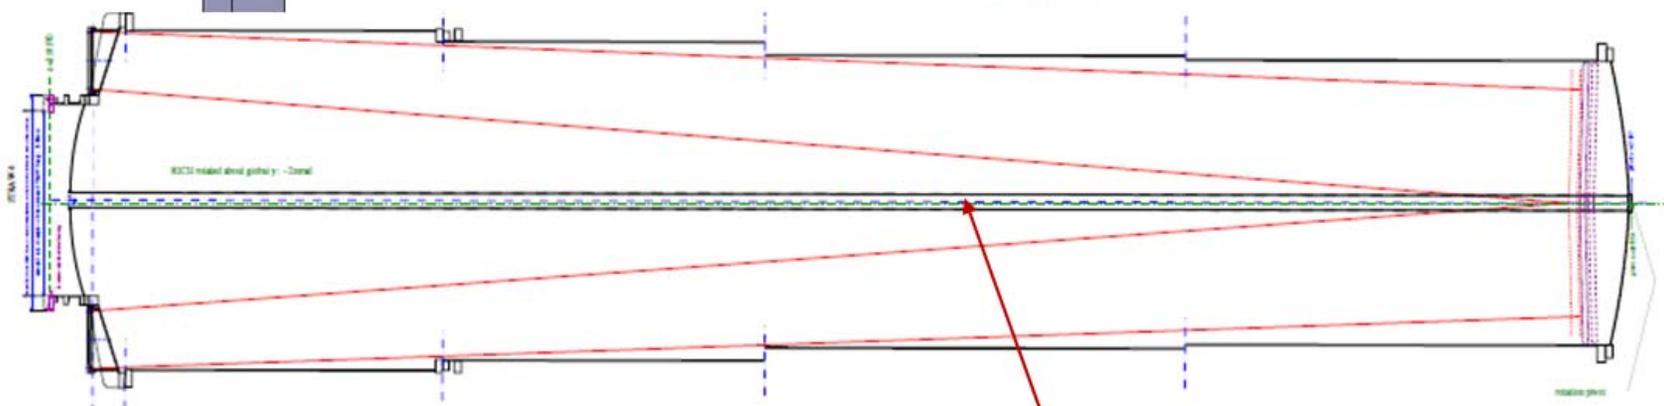


Beam Pipe

9.10.2013

M.Lenti

6

The RICH Detector of the NA62 Experiment at CERN, M. Piccini, Mon 10:30



## The Gas System



- Vessel volume: 200 m<sup>3</sup>
- Neon at slightly above atmospheric pressure
- Neon density stability < 1%
- Contaminants < 1%
- The vessel is first fully evacuated
- Then fresh Neon is introduced in the vessel
- At the end the vessel is valve closed

9.10.2013

M.Lenti

8




## The Mirrors




### Mirror Assembly

- 18 hexagonal mirrors (700 mm wide, 25 mm thick)
- 2 half mirrors around the beam pipe.

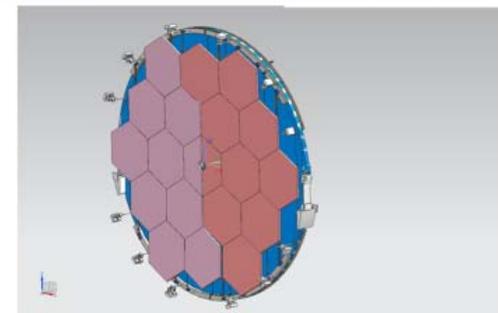


### Mirror Parameters + Quality:

- Spherical mirrors  $f = 17 \pm 0.1$  m
- Reflectivity > 90% (195 – 650nm)
- $D_o \leq 4$ mm  
(circle which collects 90% of the reflected light.)



9.10.2013

9



INFN NIM A 593 (2008) 314-318  
NIM A 621 (2010) 205-211




## Test Beams

- Strong RD to validate the chosen approach with prototypes
- 2007 Test Beam: RICH proto 96 PMs (time resolution, n.of p.e.)
- 2009 Test Beam: RICH proto 414 PMs ( $3\sigma$   $\pi$ - $\mu$  separation, DAQ,...)



9.10.2013

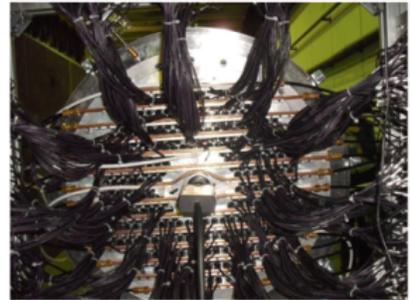

M.Lenti

19

- The NA62 RICH is a far demanding object
- Strong RD validated the project
- Installation schedule:
  - Nov 2013: RICH vessel delivery
  - Jun 2014: Mirrors Installation completed
  - Aug 2014: PM installation completed
  - Sep 2012: Gas filling completed
  - Oct 2014: RICH commissioning and first physics run of NA62

9.10.2013

M.Lenti





21



NIM A 593 (2008) 314-318  
NIM A 621 (2010) 205-211



## RICH400: performances

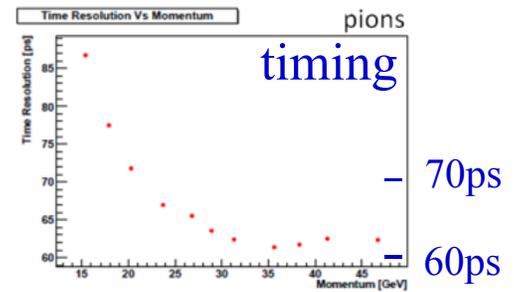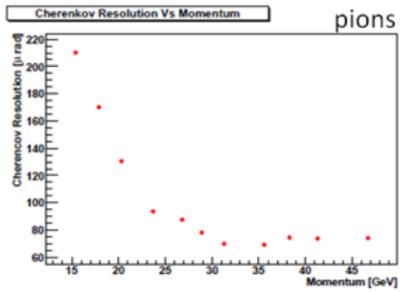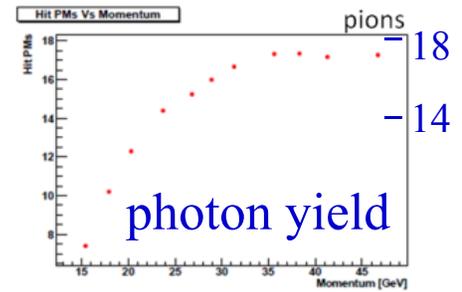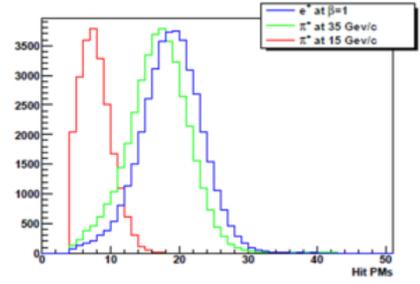


9.10.2013

M.Lenti


20

The RICH Detector of the NA62 Experiment at CERN, M. Piccini, Mon 10:30





## Particle Identification Devices

Barrel PID: Time of Propagation Counter (TOP)

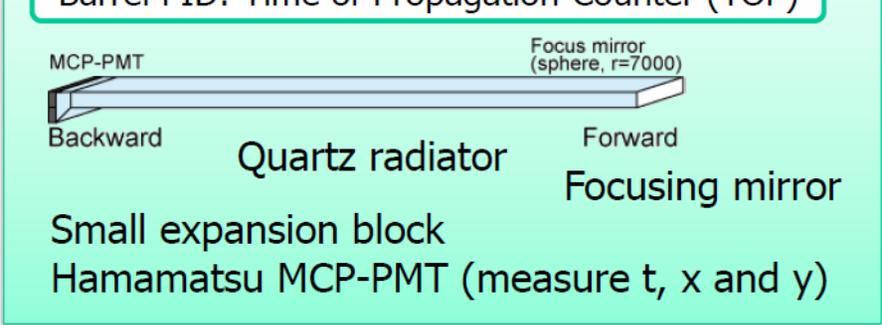

Endcap PID: Aerogel RICH (ARICH)

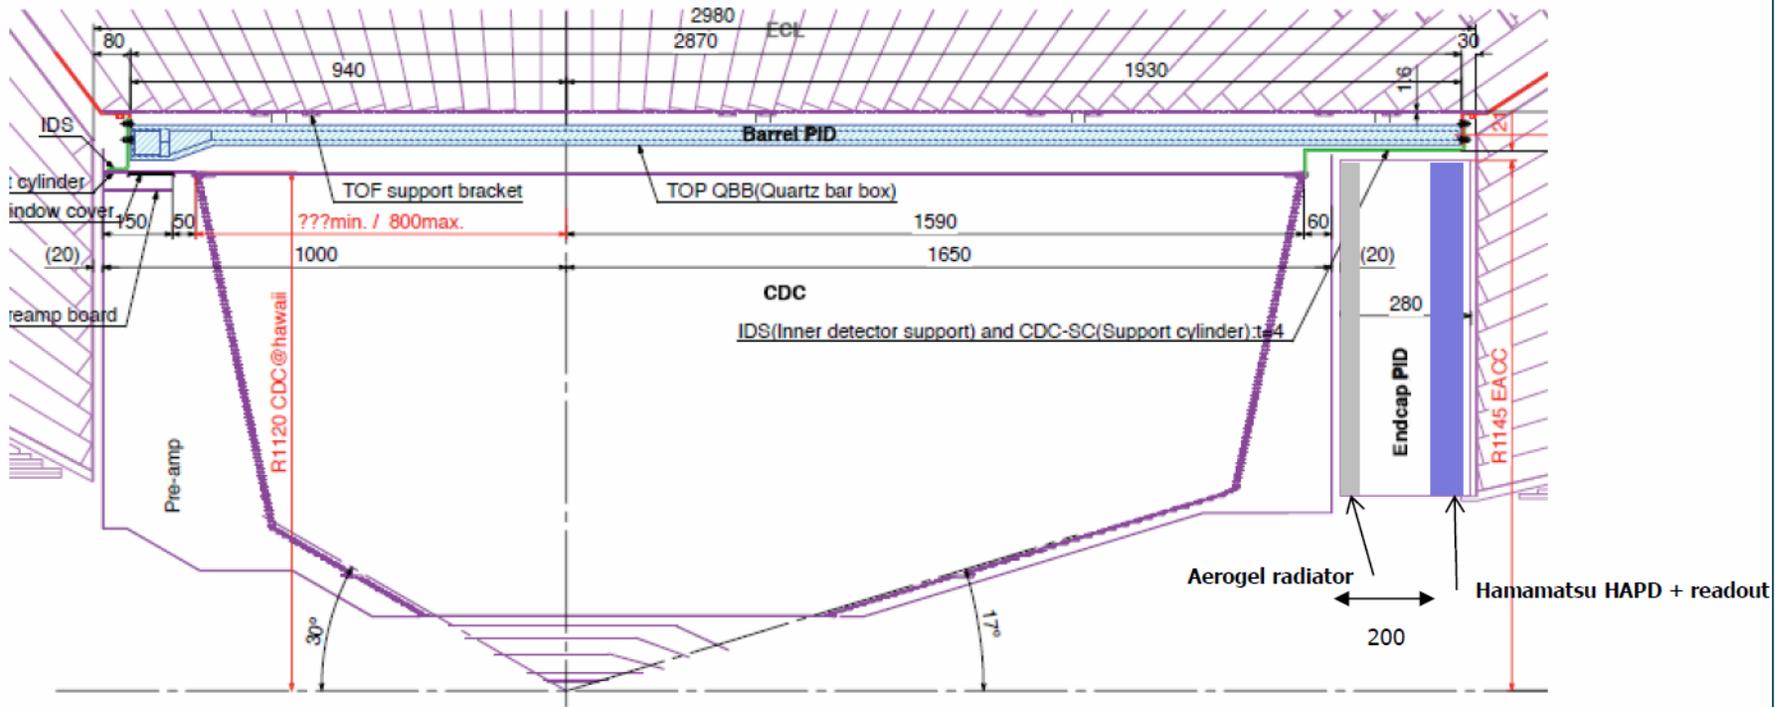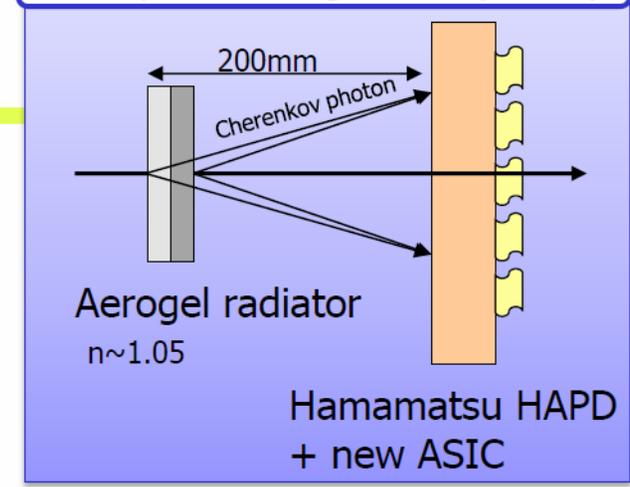


Aerogel RICH counter for the Belle II forward PID, S. Nishida, Mon 15:15

TOP counter for particle identification at Belle II experiment, K. Inami, Mon 10:55

P. Krizan, DIRC2013 Workshop


Peter Križan, Ljubljana



## Barrel PID: Time of propagation (TOP) counter

Cherenkov ring imaging with **precise time measurement**.

Device uses internal reflection of Cherenkov ring images from quartz like the BaBar DIRC

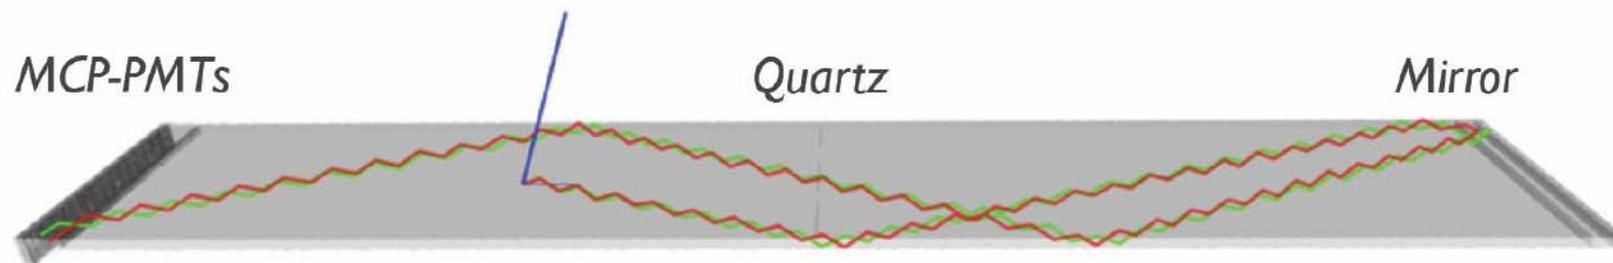

*Example of Cherenkov-photon paths for 2 GeV/c  $\pi^\pm$  and  $K^\pm$ .*

Reconstruct Cherenkov angle from two hit coordinates and the time of propagation of the photon


Quartz radiator (2cm)

Photon detector (MCP-PMT)

Excellent time resolution  $\sim 40$  ps


Single photon sensitivity in 1.5 T

Fast read-out electronics

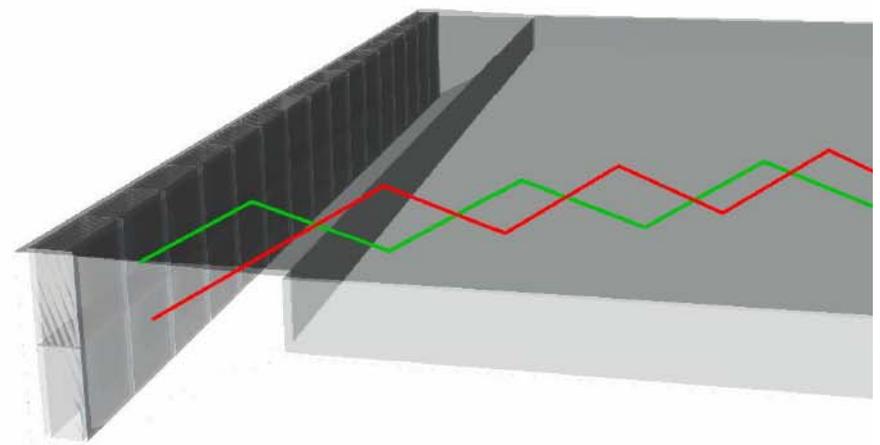

P. Krizan, DIRC2013 Workshop


TOP counter for particle identification at Belle II experiment, K. Inami, Mon 10:55



## Ring image of TOP counter

### Ring image animation

※A ring image has high sensitivity to incident position and angles of particles.




Top view




$$\pi/K$$

→  $\beta$  are difference

$$\cos\theta_c = \frac{1}{n\beta}$$



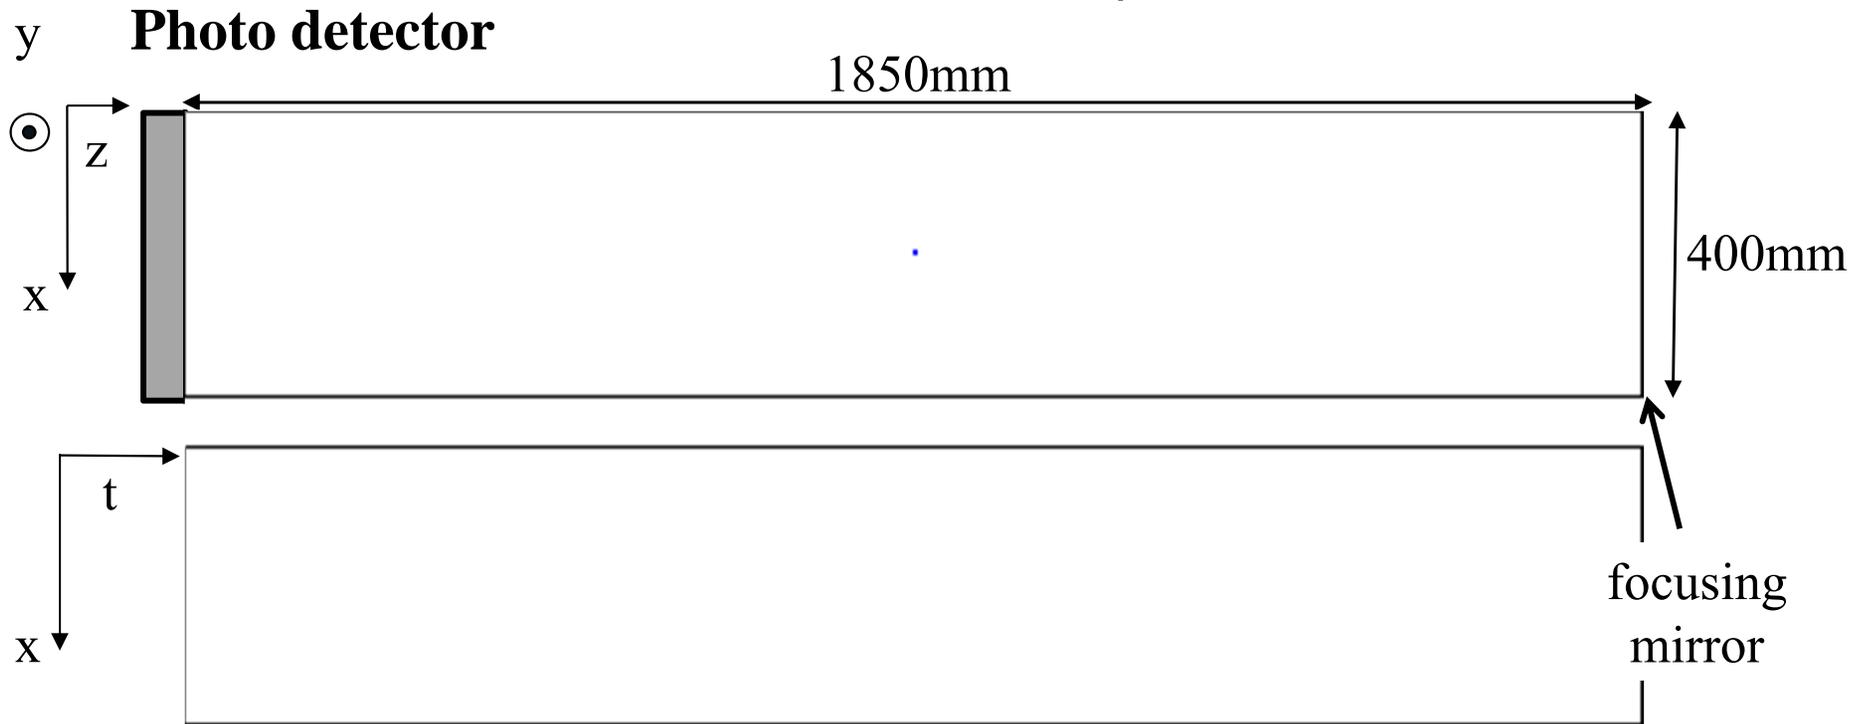


→ || ←  $\sim 200ps$  Time and position for detected photons



## TOP counter

- Measure the hit timing of  $\sim 20$  Cherenkov photons.
- Hit timing difference between 3 GeV/c K and  $\pi$ 
  - $\Delta\text{TOF} \sim 50$  ps/m
  - $\Delta\text{TOP} \sim 75$  ps/m

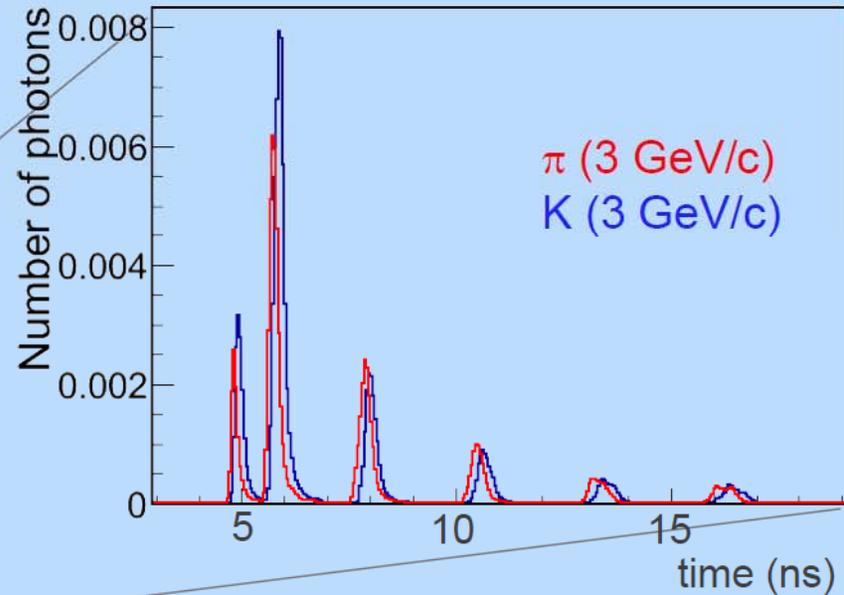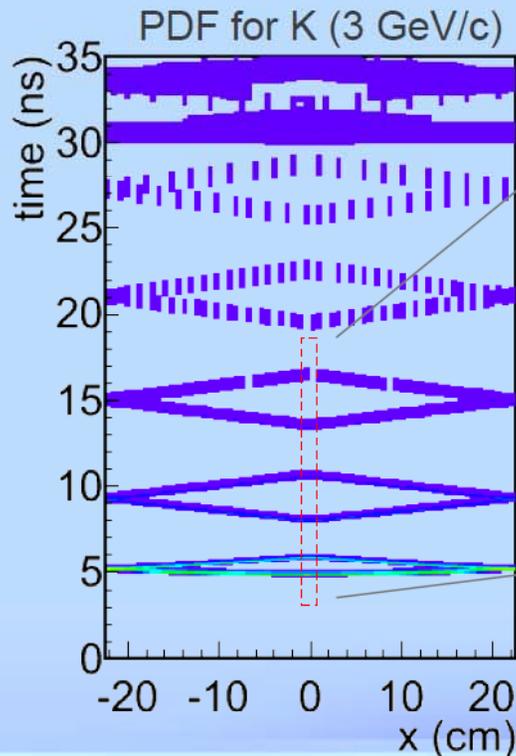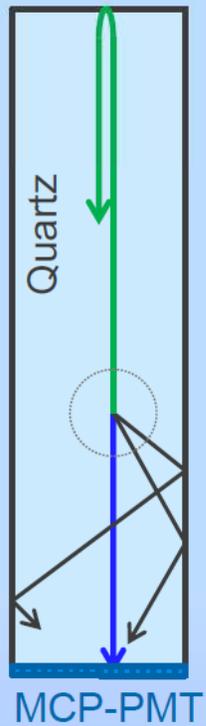

To distinguish K/ $\pi$ , the 'ring' image has to propagate undistorted along the bar and measured with good timing resolution ( $\sim 50$  ps).

K. Matsuoka, VCI2013



TOP counter for particle identification at Belle II experiment, K. Inami, Mon 10:55



TOP prototype at LEPS SPRING8 in 2013

## TOP image

Pattern in the coordinate-time space ('ring') – different for kaons and pions.  
Recorded by the CFD-based read-out.

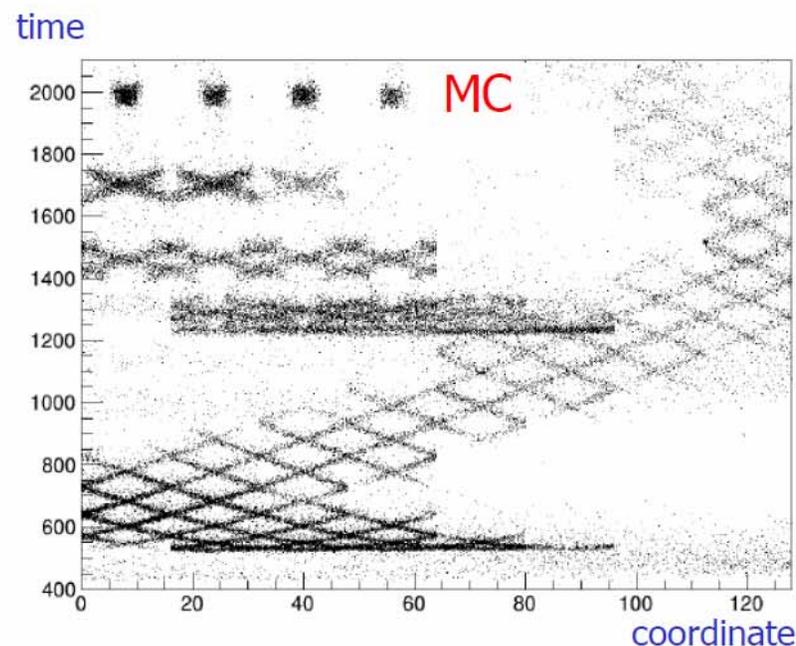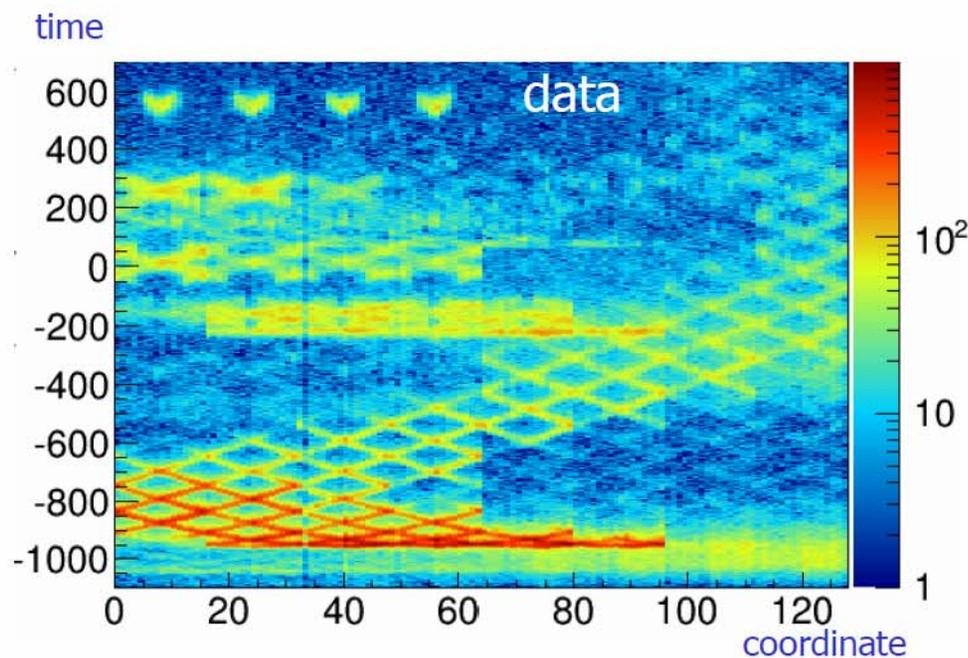


Excellent agreement between beam test data and MC simulated patterns.

P. Krizan, DIRC2013 Workshop

→ Y. Horii, talk at EPS HEP 2013, M. Barret, talk at DPF2013

TOP counter for particle identification at Belle II experiment, K. Inami, Mon 10:55



## Summary


- A novel ring imaging Cherenkov detector, TOP counter, has been developed for the K/ $\pi$  PID in Belle II.
  - Important to propagate the ring image as it is.
    - Confirmed that the quartz bar can be polished and glued to meet the stringent requirements.
  - Need good timing resolution
    - Detect single photon with  $\sim 40$  ps resolution by MCP-PMT.
- Prototype TOP counter was tested at LEPS/SPring-8.
  - The QE dependence on the photon incident angle and polarization is specifically important.
  - The ring image was obtained as expected.
- Mass production of the TOP counter is ongoing.
  - To be installed in March 2015.

K. Matsuoka, VCI2013

TOP counter for particle identification at Belle II experiment, K. Inami, Mon 10:55




## Belle II Aerogel RICH

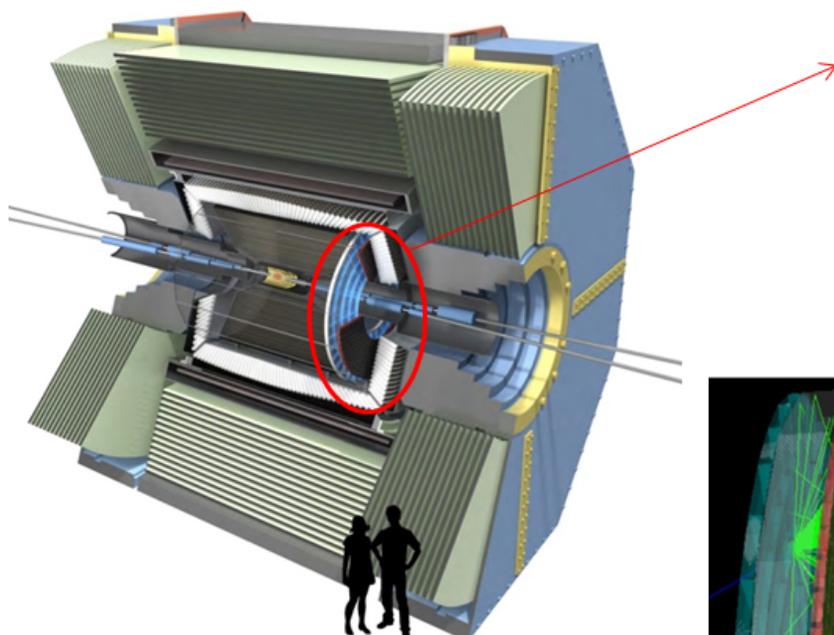

Replace threshold-type Aerogel Cherenkov Counter to **Aerogel RICH**




Concept of Aerogel RICH

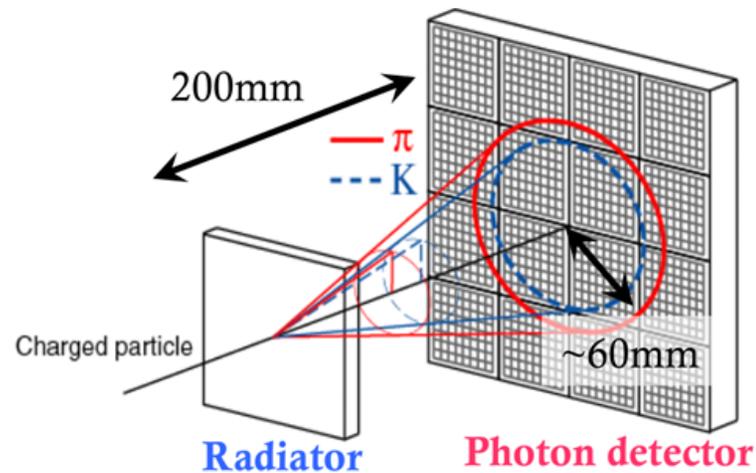


- Belle II Experiment : Physics run in 2016.
- PID plays an important role.

Target:  $K/\pi$  Separation up to 4 GeV.

$$\theta_C(\pi) - \theta_C(K) \simeq 23 \text{ mrad}$$

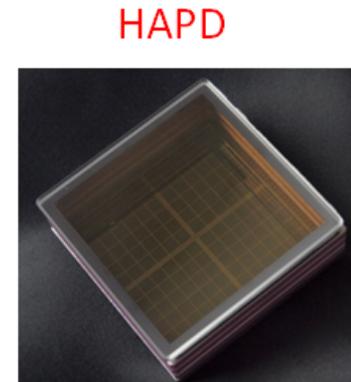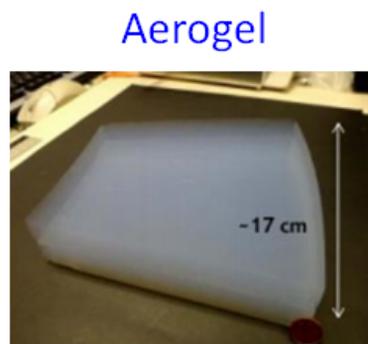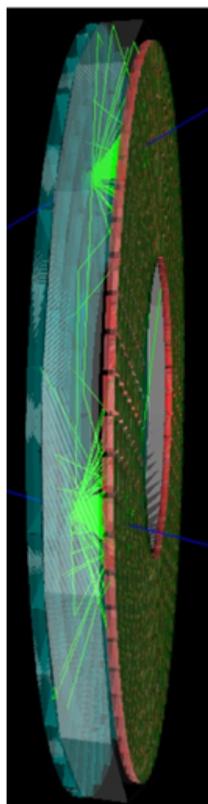

Aerogel RICH counter for the Belle II forward PID, S. Nishida, Mon 15:15




## Belle II Aerogel RICH





Aerogel RICH detector consists of

- 420 HAPD
- 248 Aerogel Tiles  
 $\langle n \rangle = 1.05$

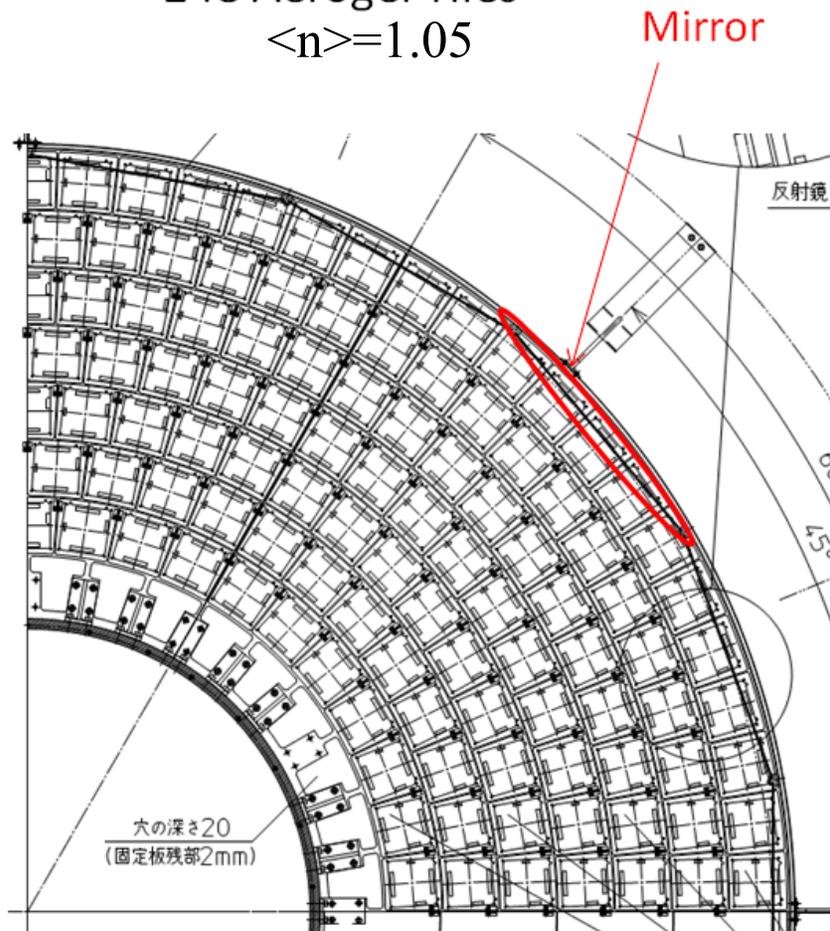


7 rings of HAPD

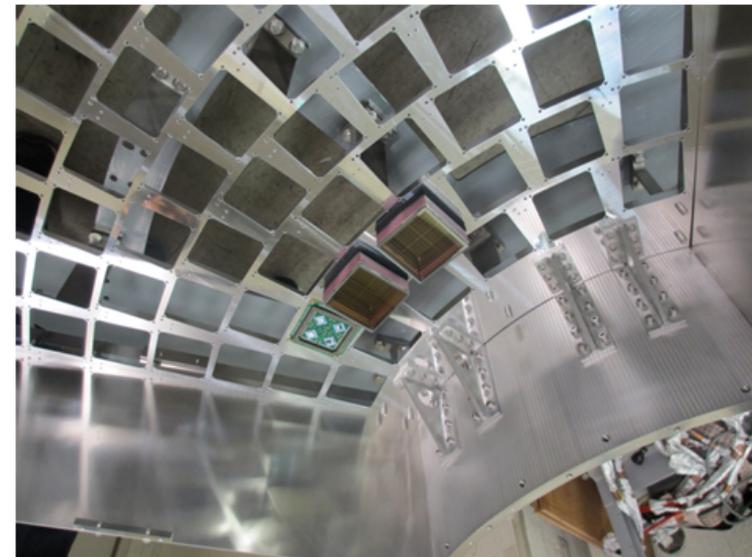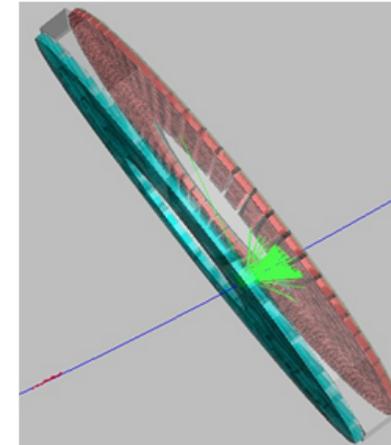

Mock-up




Aerogel RICH counter for the Belle II forward PID, S. Nishida, Mon 15:15



## ARICH photon detector: HAPD


Hybrid avalanche photo-detector developed in cooperation with Hamamatsu (proximity focusing configuration):

- 144 (12x12) channels ( $\sim 5 \times 5 \text{ mm}^2$ )
- size  $\sim 73 \text{ mm} \times 73 \text{ mm}$  (65% active area)
- total gain  $> 4.5 \times 10^4$
- (bombardment  $> 1500$ , avalanche  $> 40$ )
- typical peak QE  $\sim 28\%$  ( $> 24\%$ )
- works in magnetic field
- ( $\sim$ perpendicular to the entrance window)

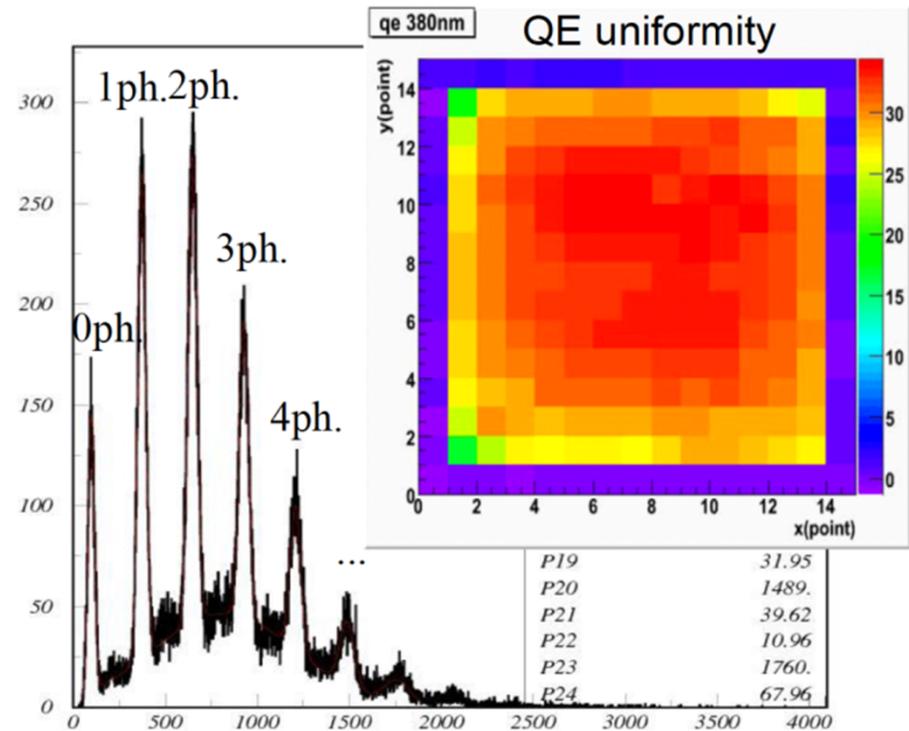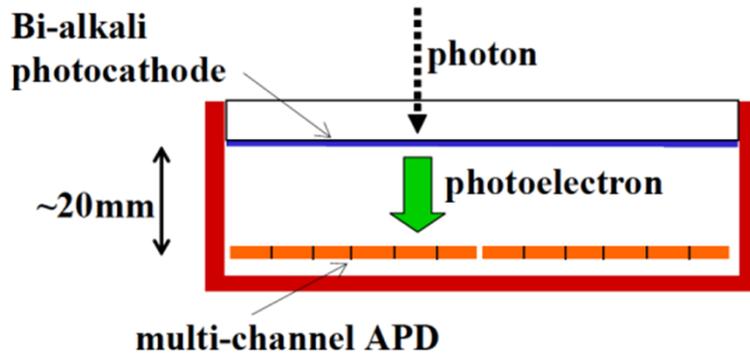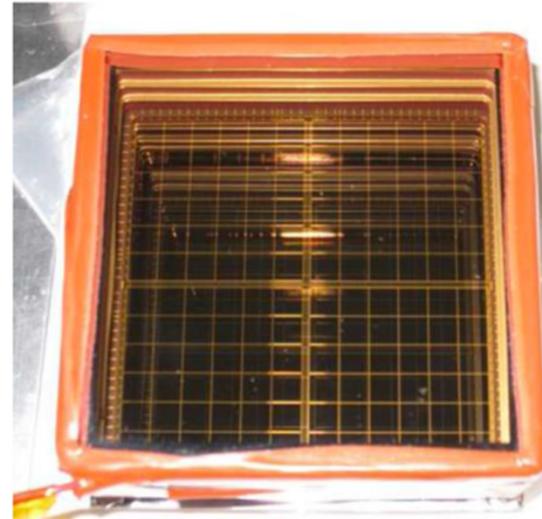




Good photon counting.

144-channel HAPD for Aerogel RICH at Belle II, S. Korpar, Tue 18:05




## Prototype performance

- tests with 120 GeV/c pions @CERN and 5 GeV/c electrons @ DESY
- detected number of photons/ring: ~ 10
- single ph. angle resolution: ~ 15 mrad

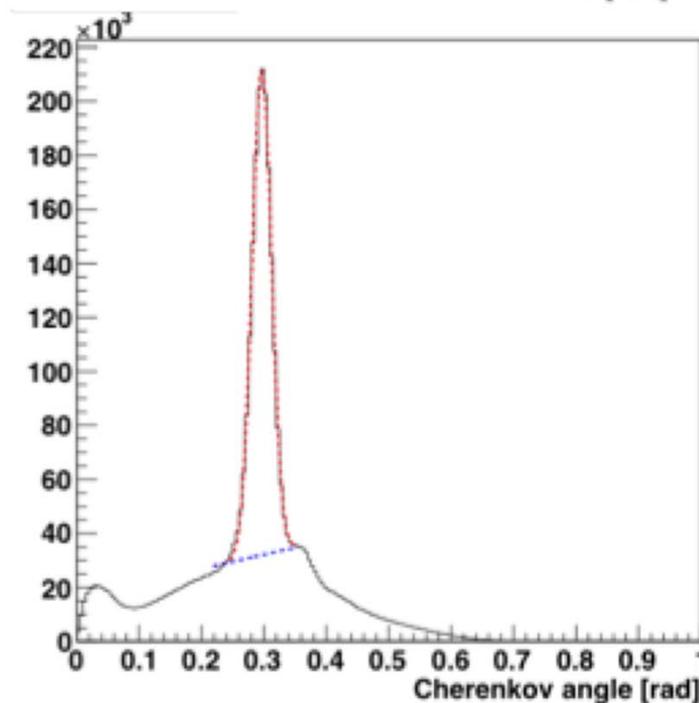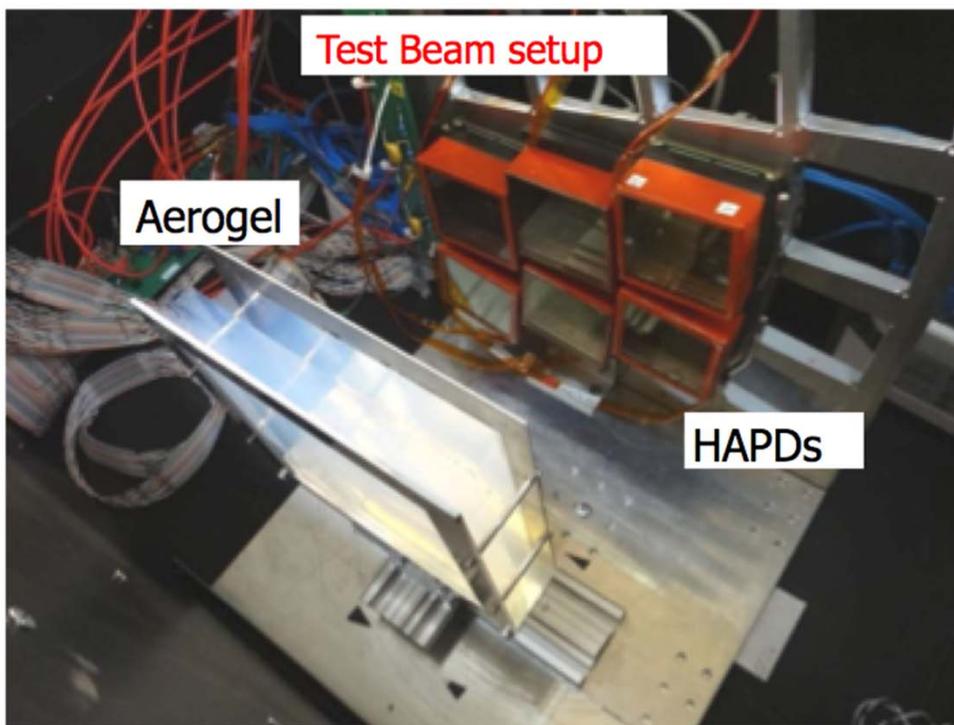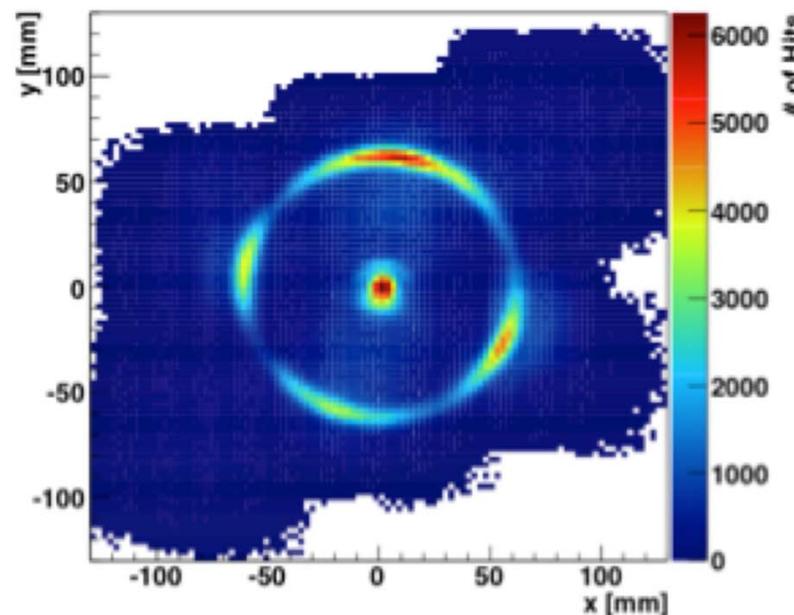


**Better than 5  $\sigma$   $\pi$ /K separation @ 3.5 GeV/c**



Aerogel RICH counter for the Belle II forward PID, S. Nishida, Mon 15:15



## PANDA DIRC Detectors

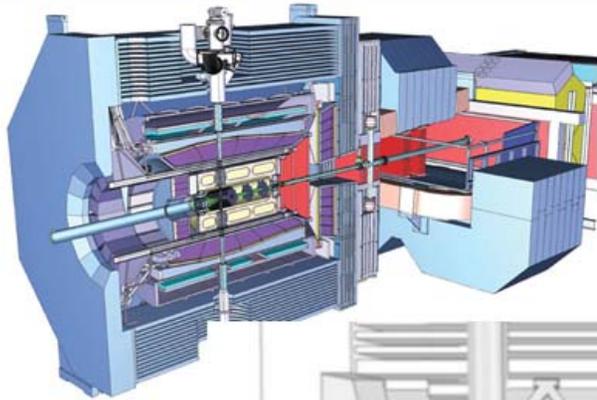

**Barrel DIRC**  
(22°-140°)

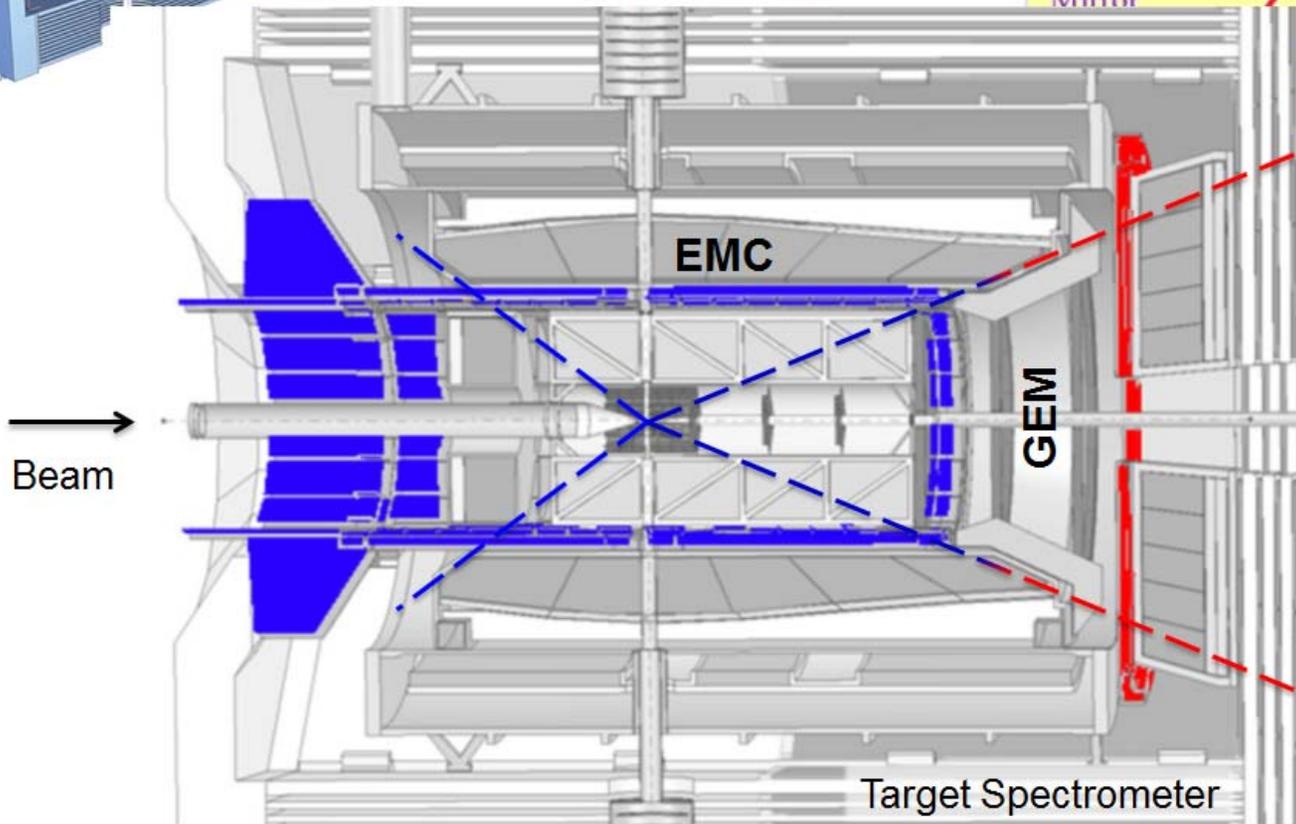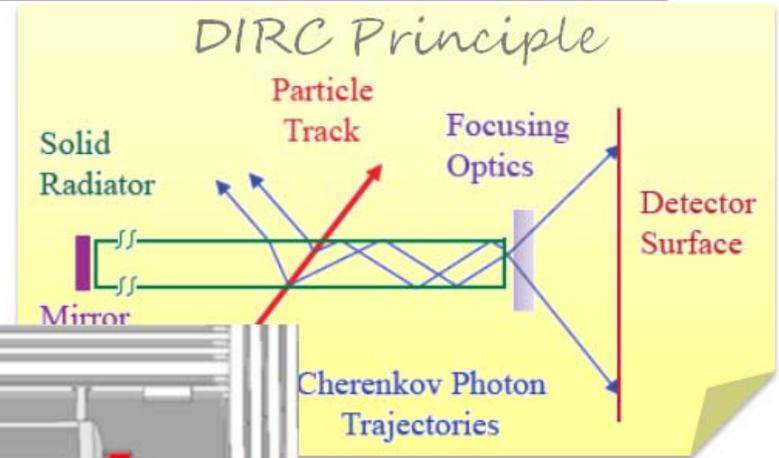

**Endcap DIRC**  
(5°-22°)

The PANDA Barrel DIRC | M. Hoek | RICH 2013 | 02-06 Dec 2013 | Hayama, Kanagawa, Japan



The PANDA Barrel DIRC Detector, M. Hoek, Mon 11:20





## Evolution of Barrel DIRC Design




Scaled version of BABAR DIRC

~ 7,000 PMTs

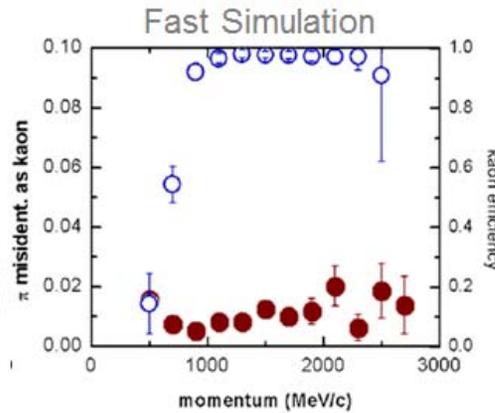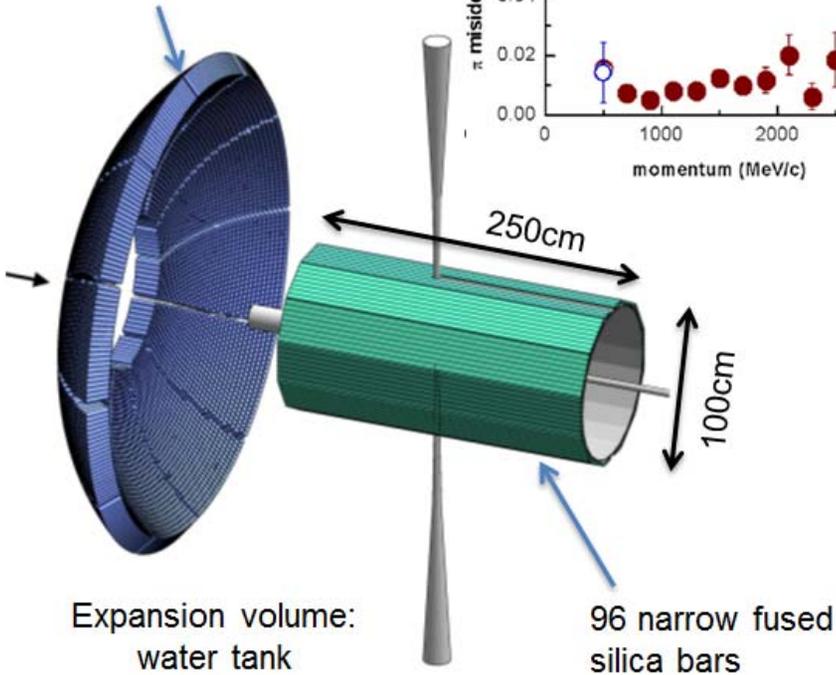


- Benefit from
- SLAC fDIRC R&D
  - new MCP-PMT advances

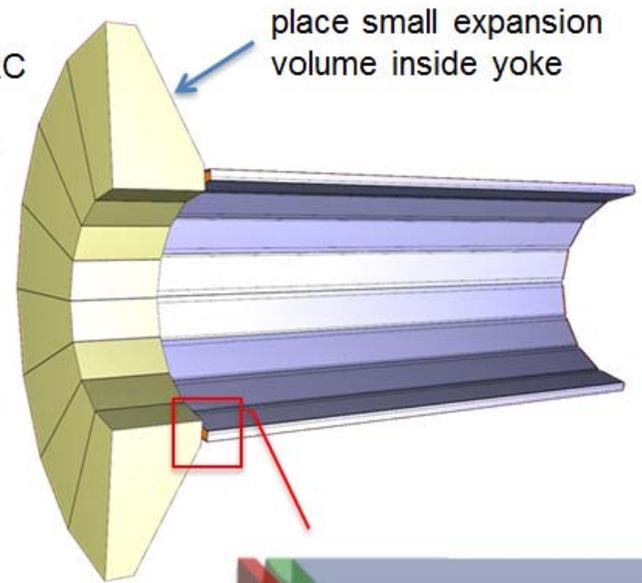

- requires **focusing** to achieve required PID performance
- bar size dominates resolution








## PANDA BARREL DIRC

**Baseline design:** based on BABAR DIRC with key improvements

- Barrel radius  $\sim 48$  cm; expansion volume depth: 30 cm.
- 80 narrow radiator bars, synthetic fused silica  
17mm (T)  $\times$  32mm (W)  $\times$  2400mm (L).
- **Focusing optics:** lens system.
- **Compact photon detector:**  
30 cm oil-filled expansion volume  
 $\sim 15,000$  channels of MCP-PMTs.
- **Fast photon detection:**  
fast TDC plus ADC (or ToT) electronics.
- **Expected performance:**  
Single photon Cherenkov angle resolution: 8-10 mrad.  
Number of photoelectrons for  $\beta \approx 1$  track: at least 20.

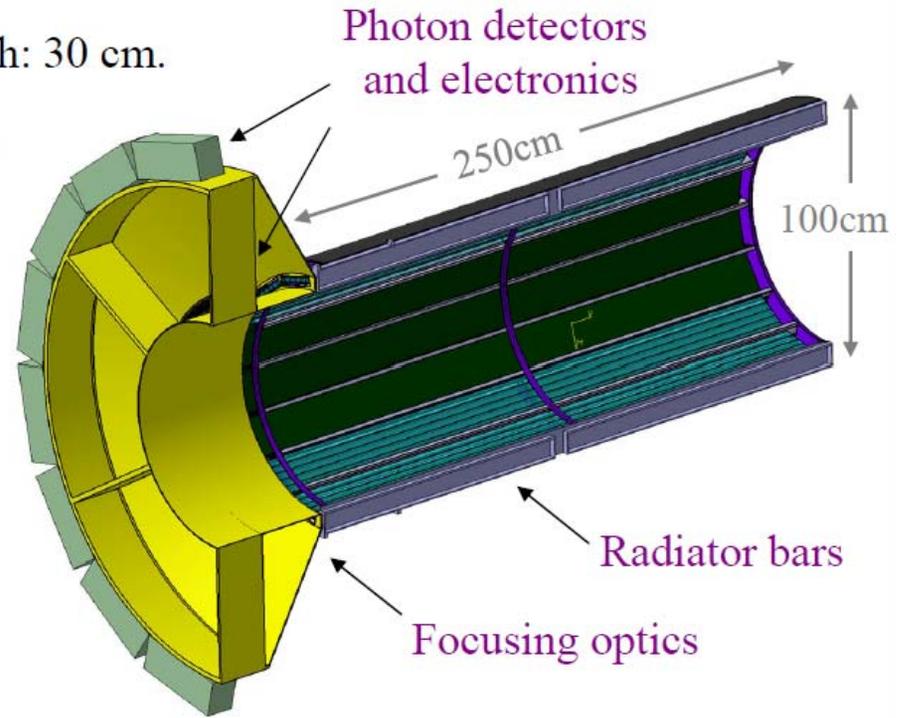

The PANDA Barrel DIRC Detector, M. Hoek, Mon 11:20

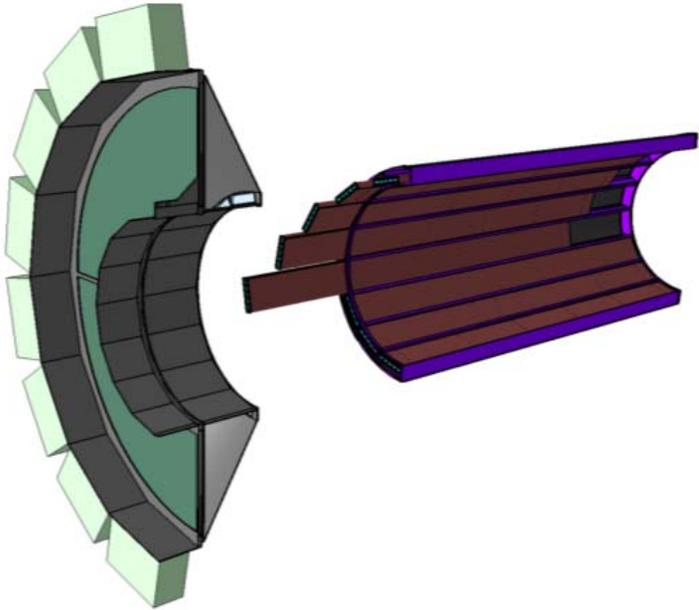


## Modular mechanical design.



Bar boxes slide into slots, can be installed/removed as required (similar to BABAR DIRC).

Expansion volume detaches for access to bar boxes and tracking detectors.

## Prototype in CERN test beam in 2012.

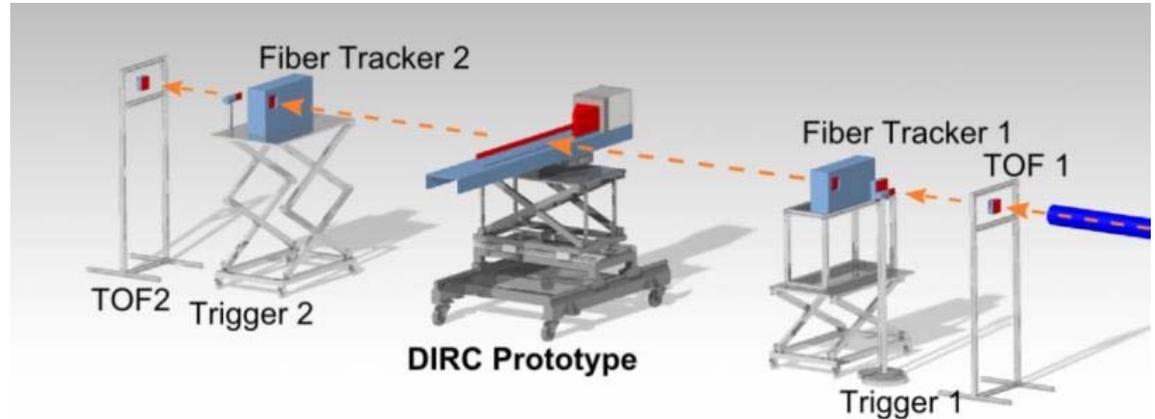


- Fine angular scan study  
2° range with 0.25° steps to avoid pixelization effect.
- Expected  $\Theta_c = 824$  mrad  
 $\sigma_{\Theta_c} \approx 8$  mrad
- $\Theta_c$  consistent with expectations.
- Differences in  $\sigma$  comes from beam divergence.

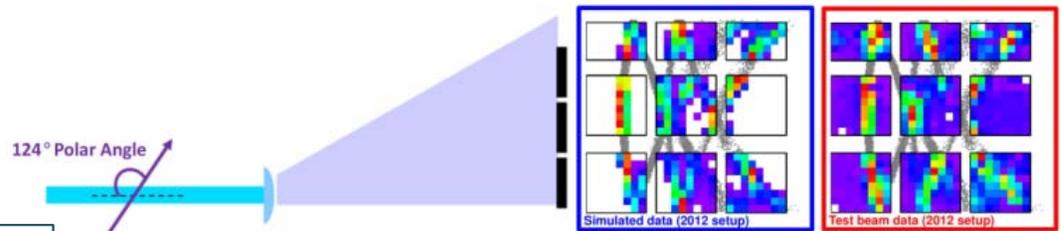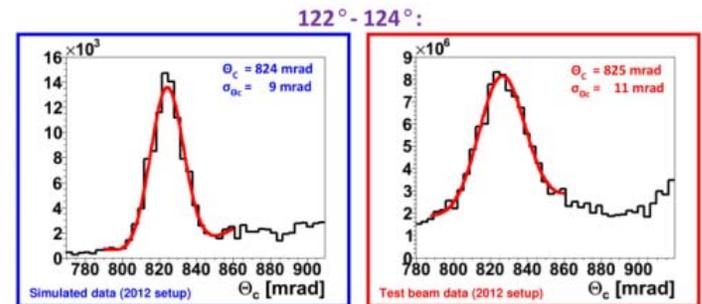

Prototyping the PANDA Barrel DIRC, C. Schwarz, Poster

The PANDA Barrel DIRC Detector, M. Hoek, Mon 11:20



## PANDA BARREL DIRC SUMMARY

The PANDA Barrel DIRC design evolved from scaled-down BABAR DIRC to a compact **fast focusing DIRC**.

Baseline design with narrow bars and high-n lens system appears to **meet PANDA PID goals**.


Recent lifetime advances make **MCP-PMTs** an excellent sensor choice.

Ongoing prototype program has identified several potential vendors for **radiator fabrication**.


Decision on **wide radiator plates** and solid fused silica prisms as **Cherenkov cameras** due 2014.

Progression of increasingly **complex system prototypes** to validate design choices and PID performance using particle beams.


Leading edge technologies, benefit from delayed technology decision  
→ **system still in R&D phase, Technical Design Report planned for late 2014.**

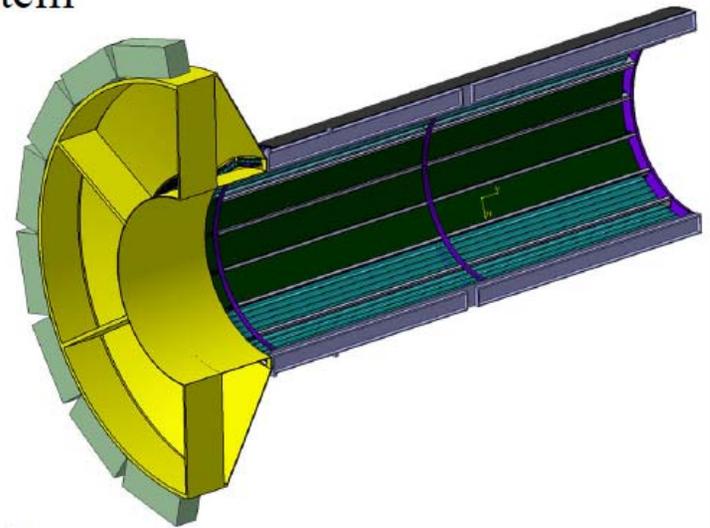

The PANDA Barrel DIRC Detector, M. Hoek, Mon 11:20



## Working principle

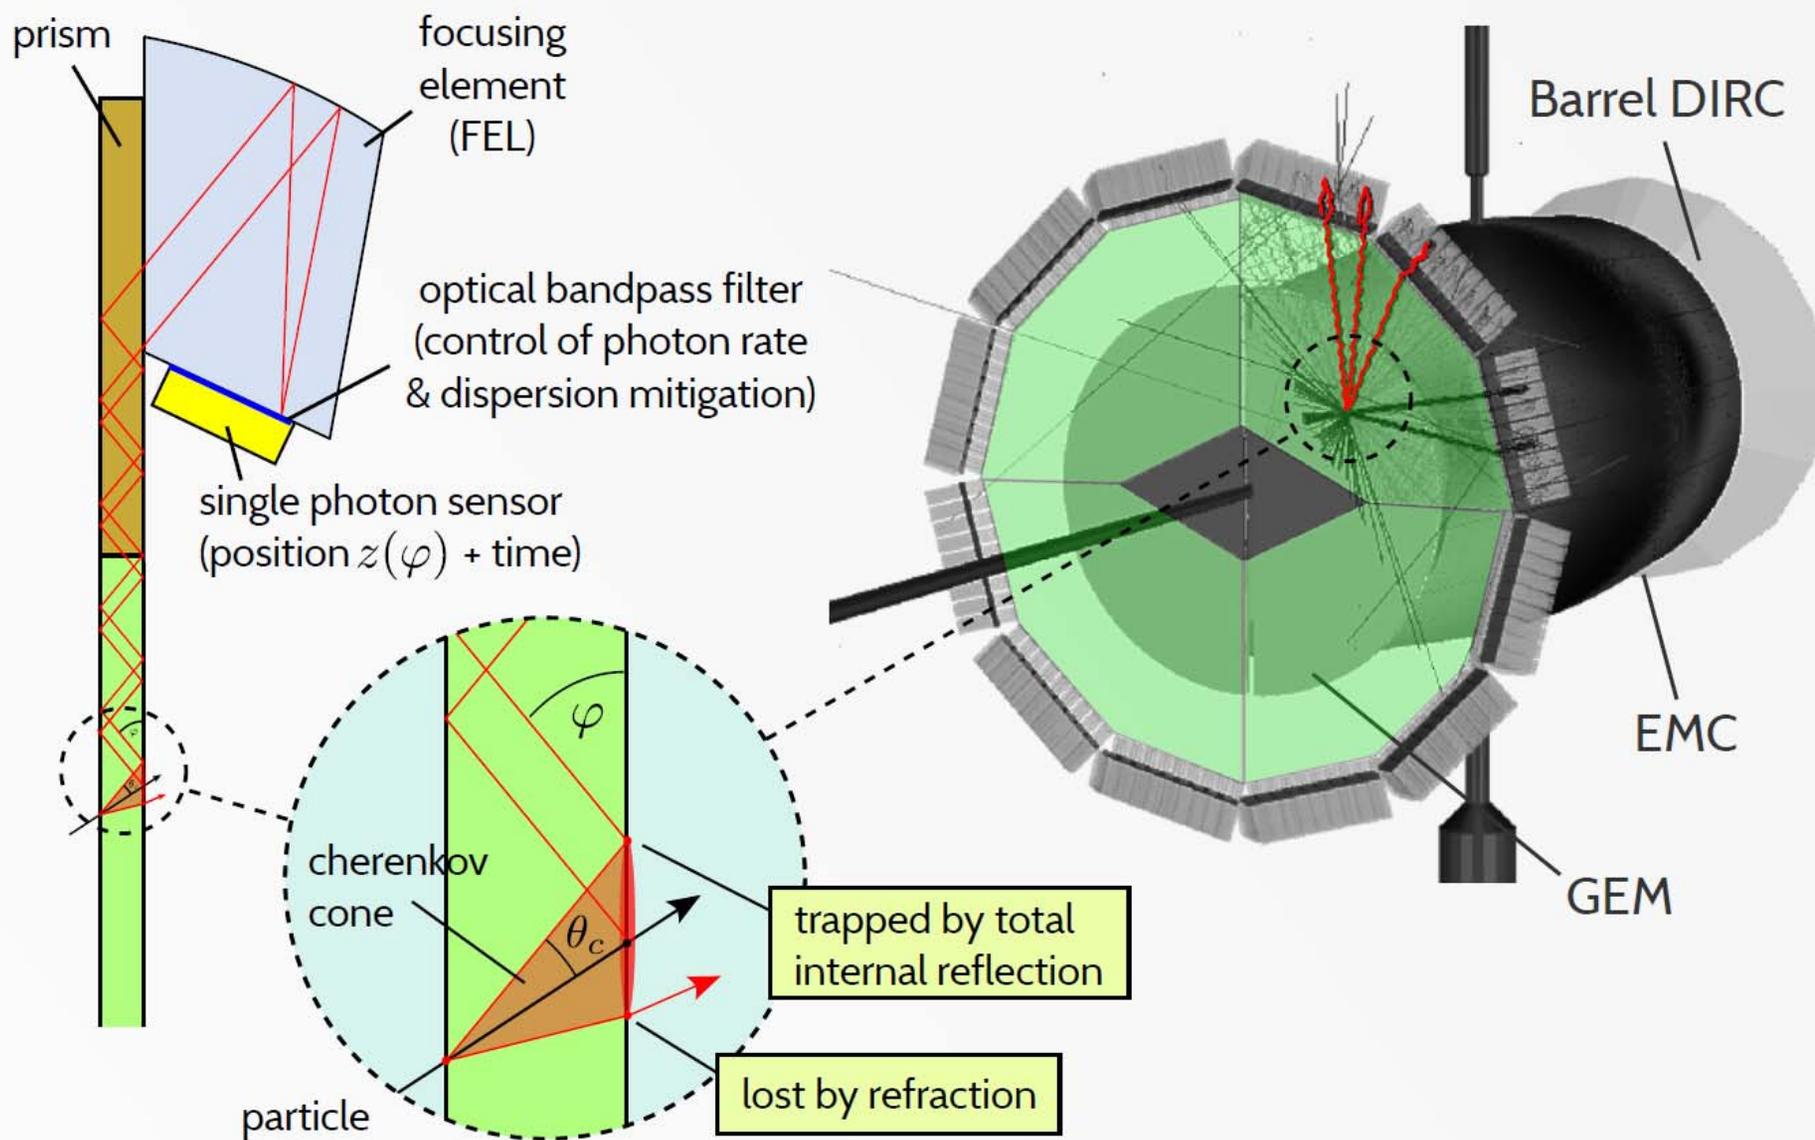


Development of an Endcap DIRC for PANDA, O. Merle, Mon 17:00




# PANDA DISK DIRC

## Setup

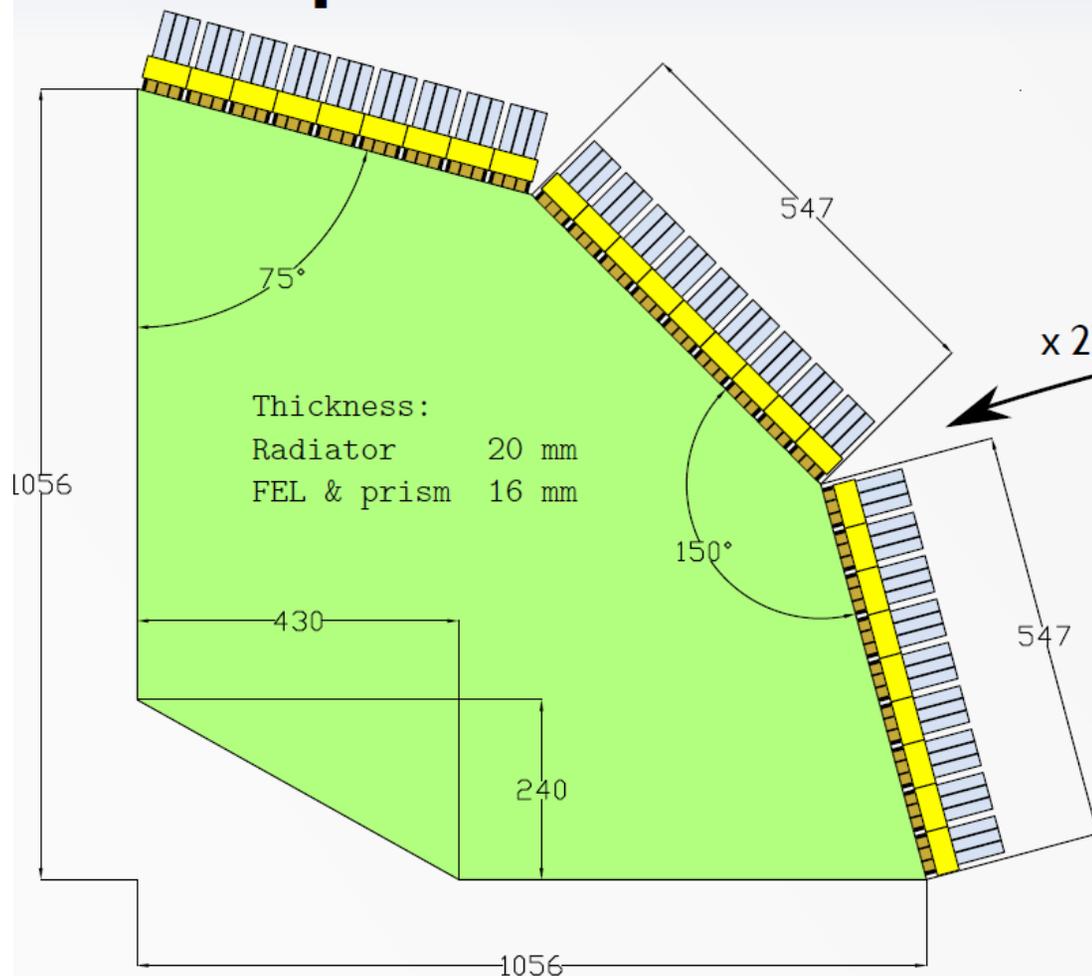

## readout modules

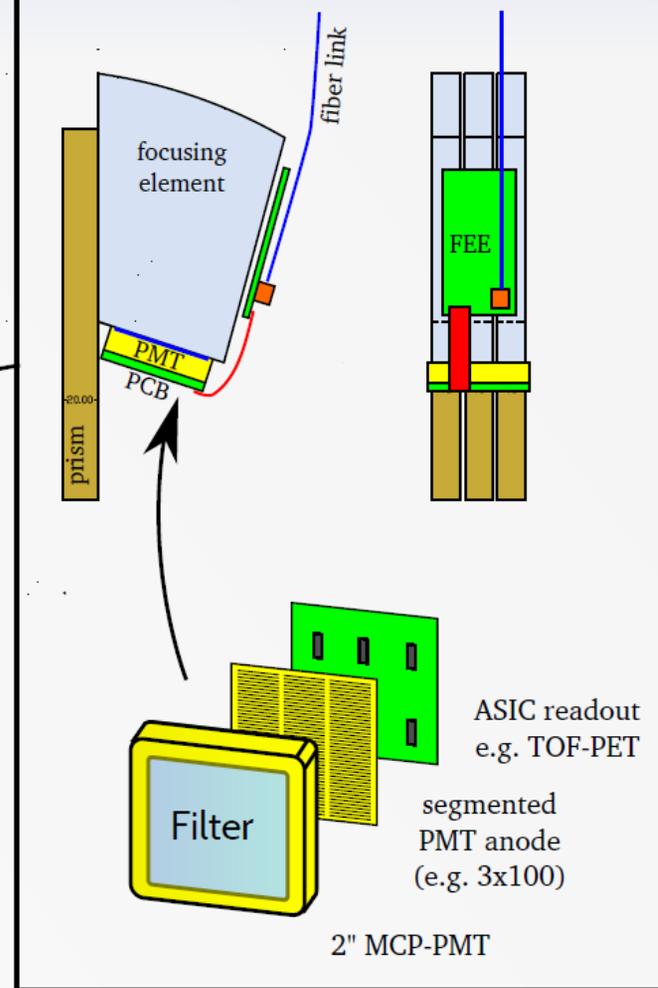

Filter band: 385 nm - 460 nm  $\Rightarrow N_{ph} \approx 16$




Integrated anode charge:  $Q \approx 5.6 \text{ C/cm}^2$

Avg. rate: 225 kHz/cm<sup>2</sup> (19 kHz/ch)

Peak data rate per module: ~0.6 GBit/s

ASIC candidate: TOF-PET (64 ch/die, 100 kHz/ch, ~6 mW/ch, 50 ps time-bin, 40 ns dead time)


Development of an Endcap DIRC for PANDA, O. Merle, Mon 17:00




## Accumulated hit-patterns

Geant4 simulation


10k pion-tracks at 4 GeV/c  
per histogram

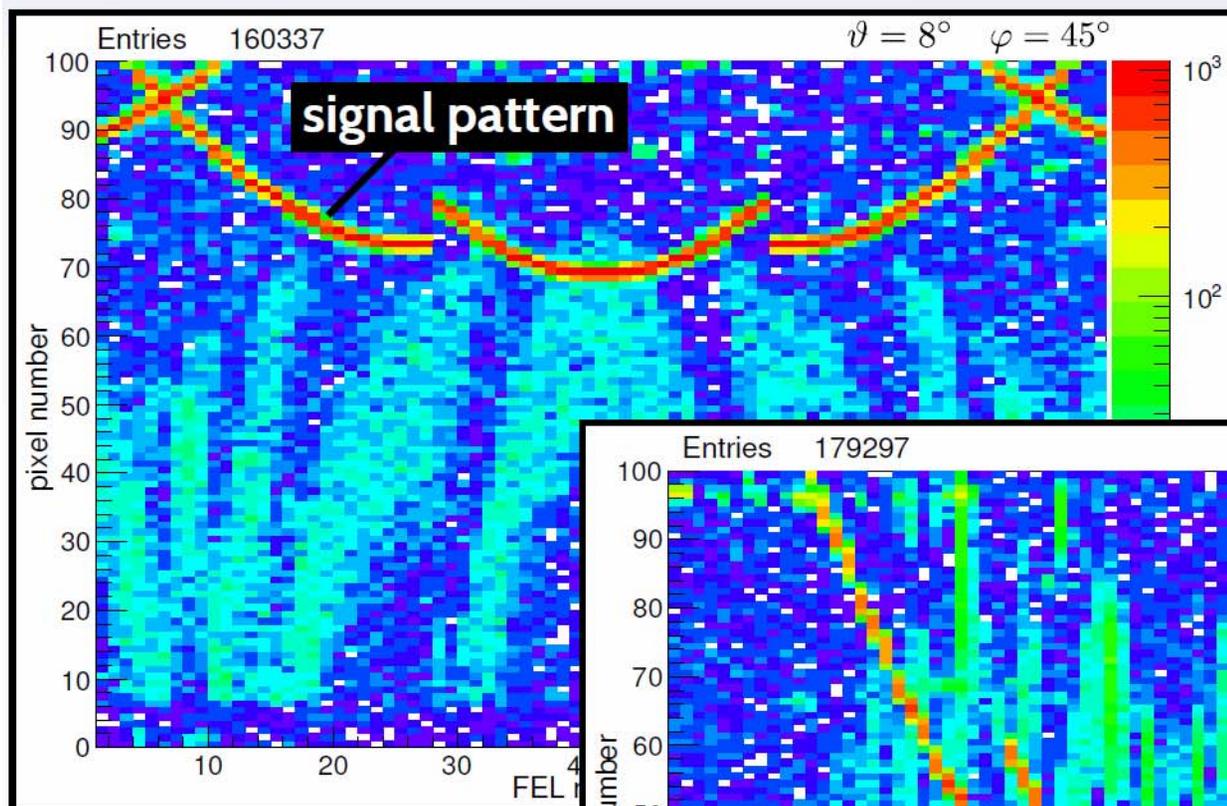

stray light,  
background

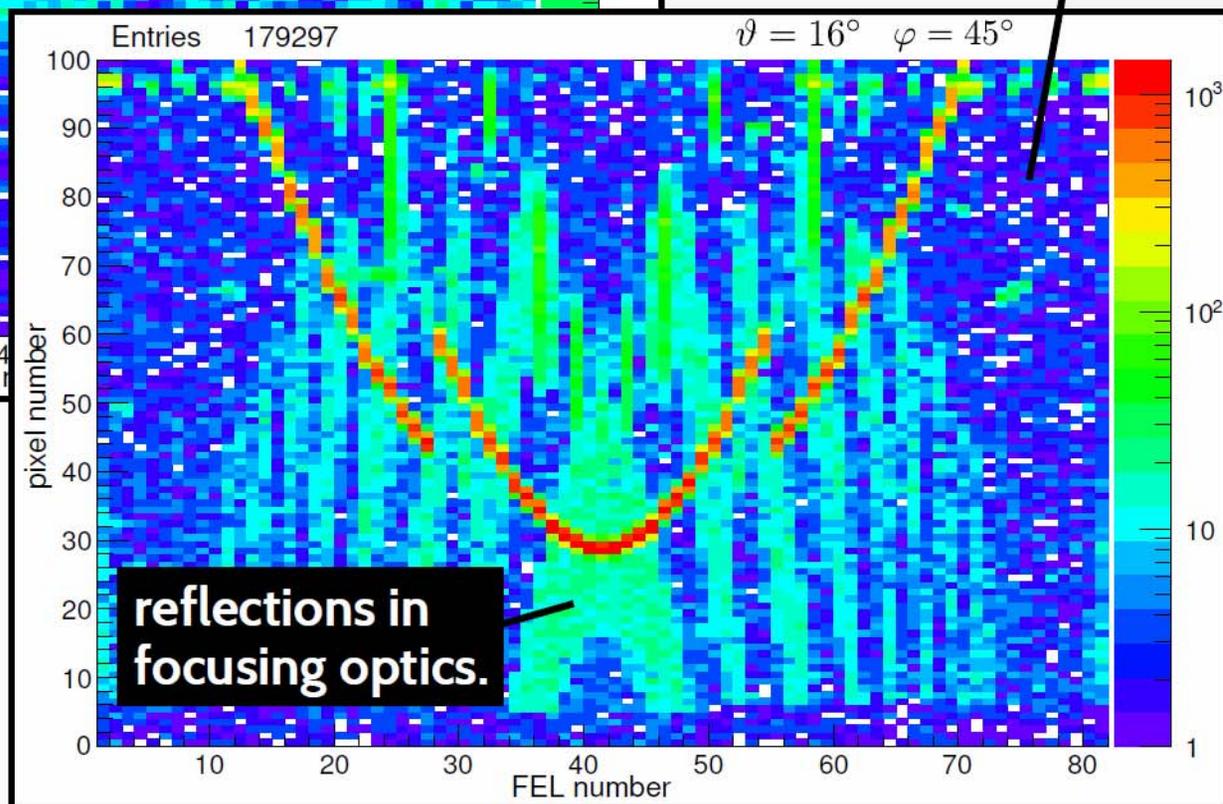


Development of an Endcap DIRC for PANDA, O. Merle, Mon 17:00




# PANDA DISK DIRC

## $\pi/K$ separation at 4 GeV/c for different number of FELs (SiO<sub>2</sub> prism)

2 x 10k tracks/marker, no exp. background  
1 mrad smearing of particle track in  $\theta$  and  $\varphi$   
0.5 mm pixel size, passband: 385 - 460 nm

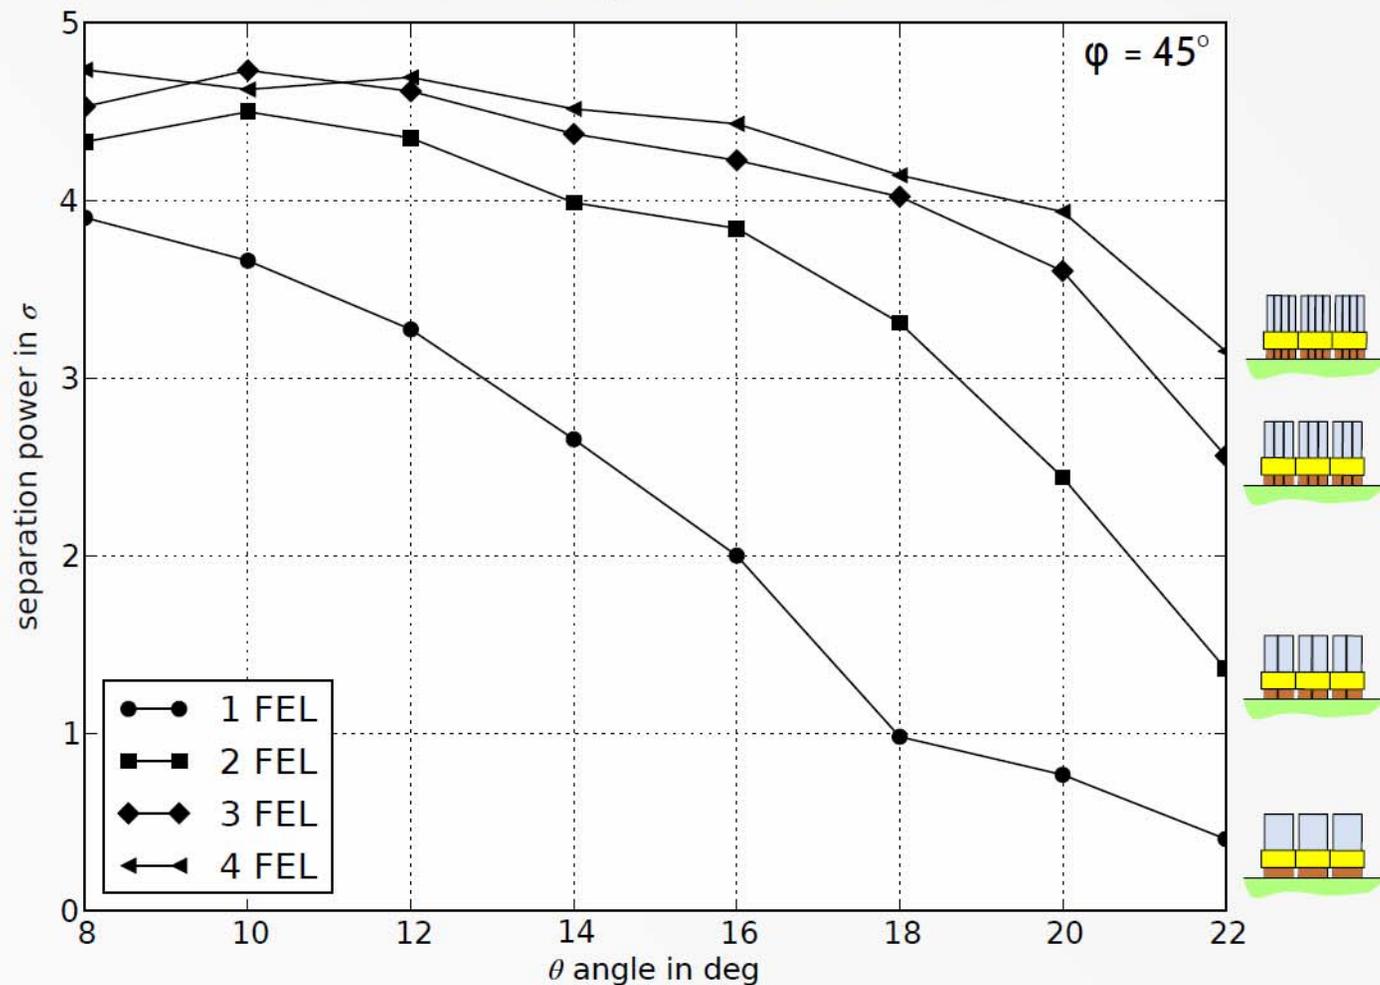

Development of an Endcap DIRC for PANDA, O. Merle, Mon 17:00



## Summary



System design has been revised:


- less demanding optics
- fulfills the PANDA space requirements
- realistic MCP-PMT lifetime and rate requirements
- only minor ASIC modifications needed (analog part)

Basic principle of operation has been demonstrated using a "low-budget" prototype.



Next step: prototype of a high resolution readout module:

- high precision fused-silica focusing optics
  - + MCP-PMT with custom anode + ASIC readout
- to verify that the desired performance can be reached.

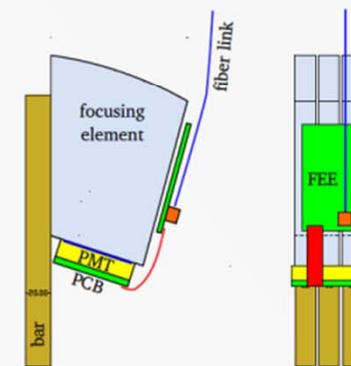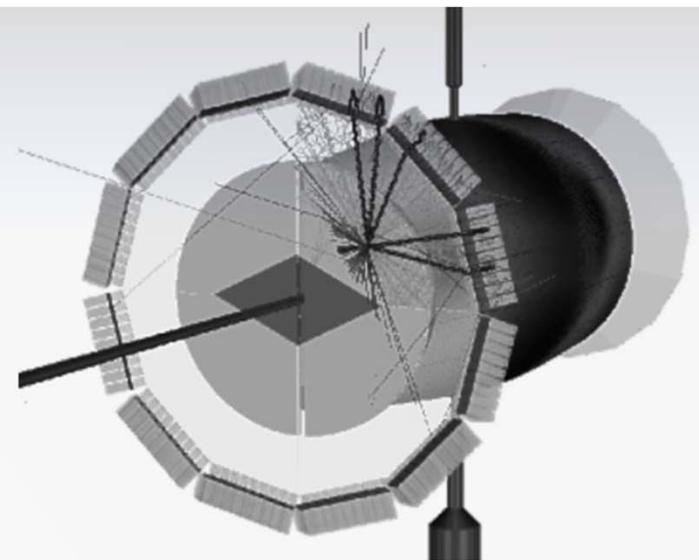



## RICH Detectors

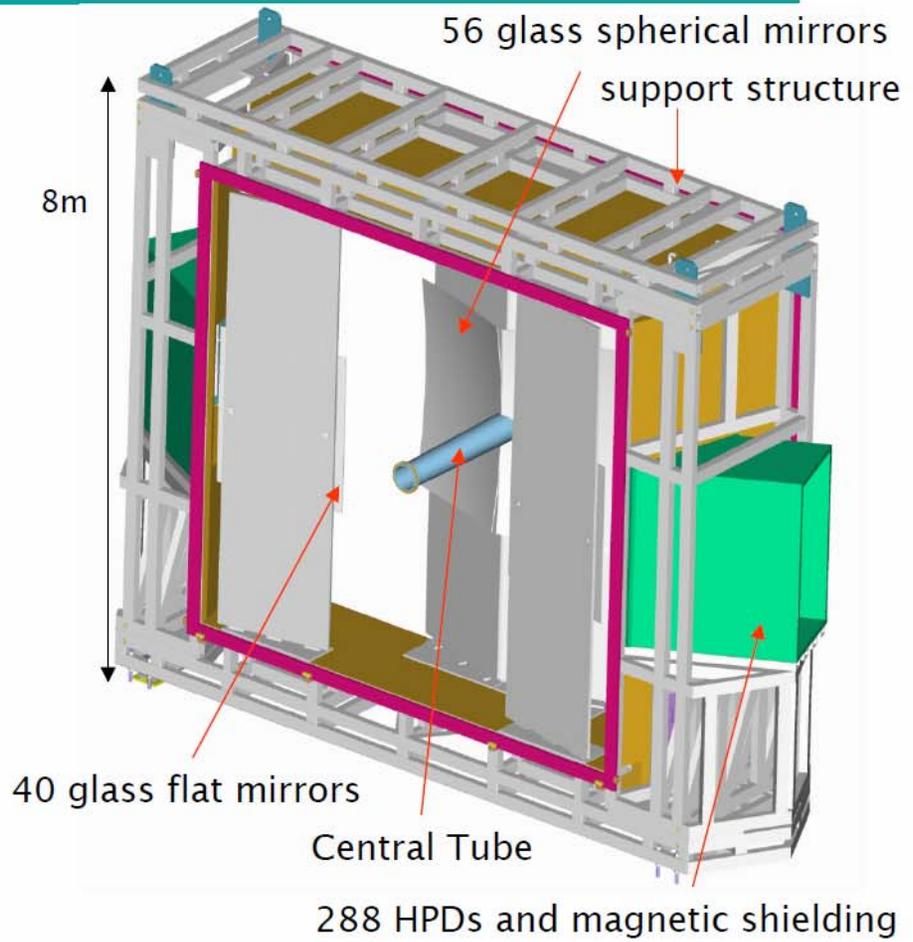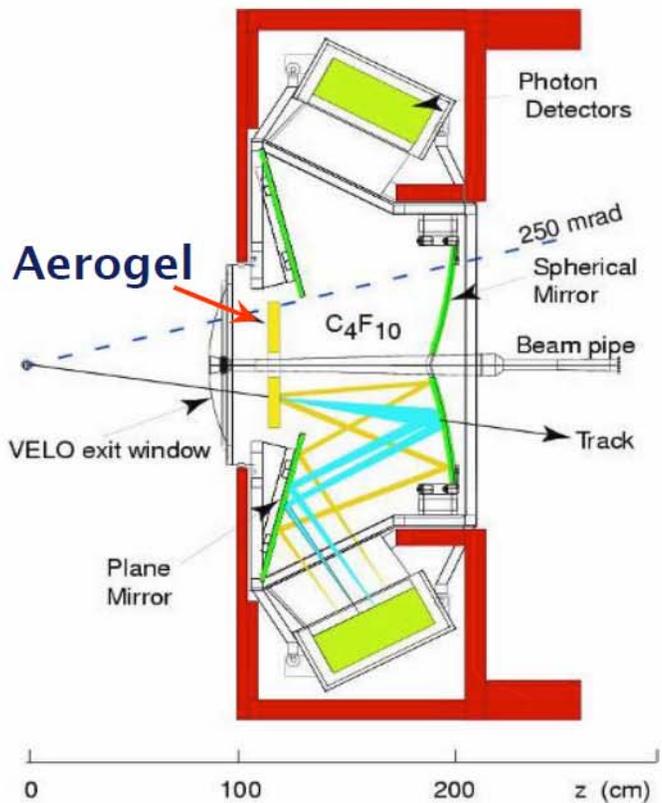

### RICH1:

5 cm aerogel  $n = 1.03$ , 1-10 GeV  
 4 m<sup>3</sup>  $C_4F_{10}$   $n = 1.0014$ , up to 60 GeV

### RICH2:

100 m<sup>3</sup>  $CF_4$   $n = 1.0005$ , up to ~100 GeV





## Cherenkov angle resolution




The LHCb RICH system; detector description and operation, A. Papanestis, Mon 14:00


- Single photon resolution
  - Distributions for saturated ( $\beta=1$ ) tracks

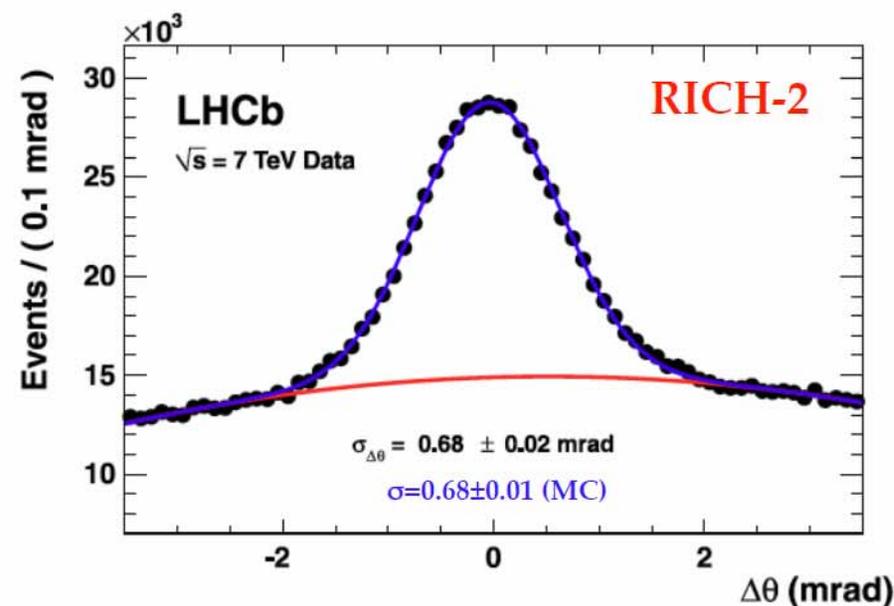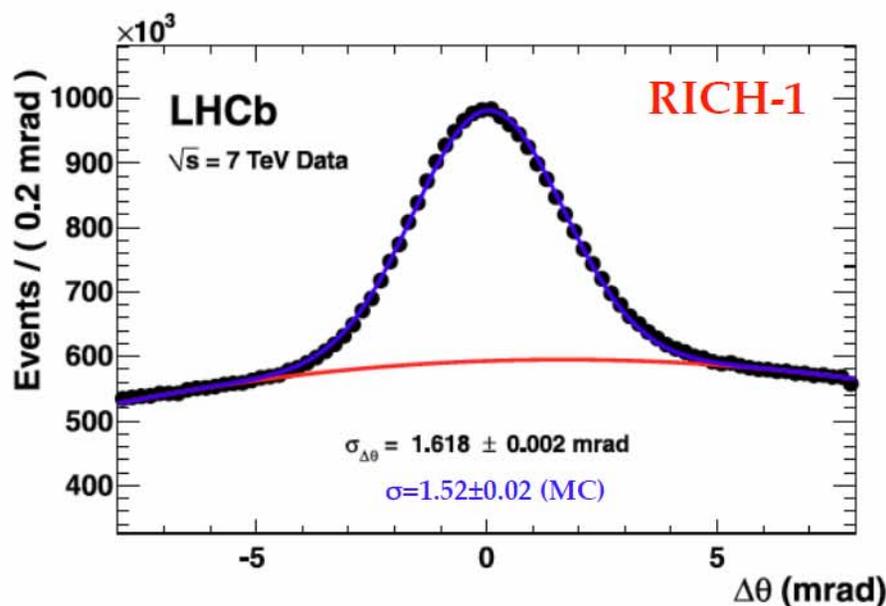


- Particle identification is achieved using an overall event log-likelihood algorithm
  - All tracks in both RICH are considered simultaneously






## $\theta_C$ versus Momentum

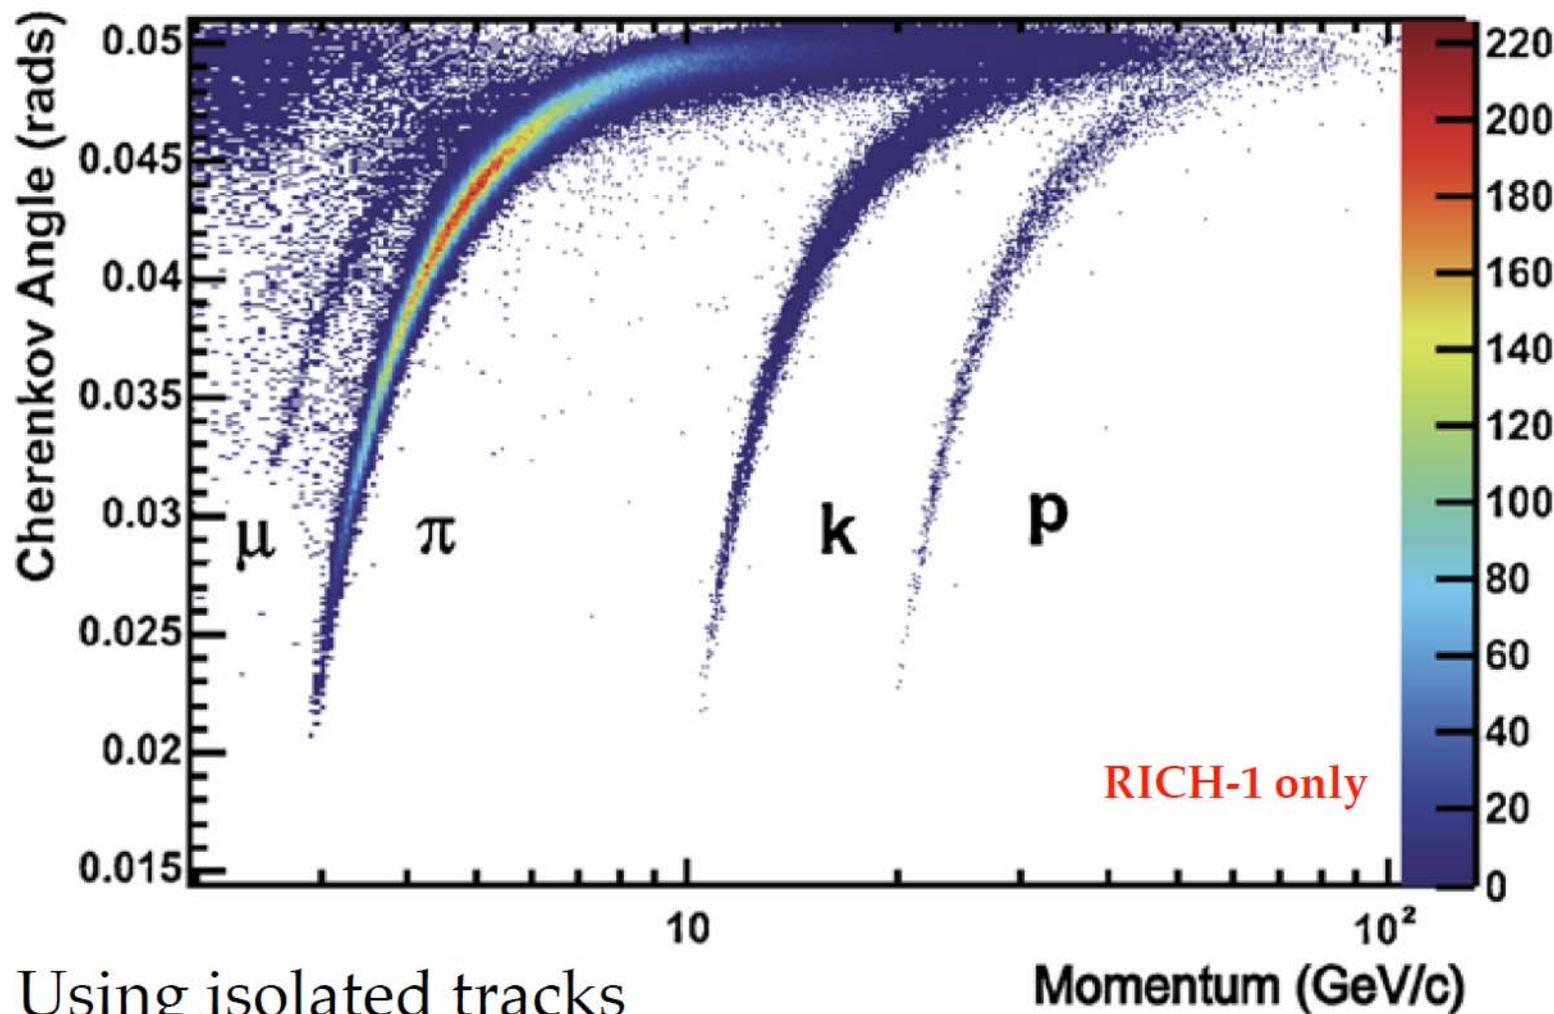



- Using isolated tracks




## PID Performance (1)

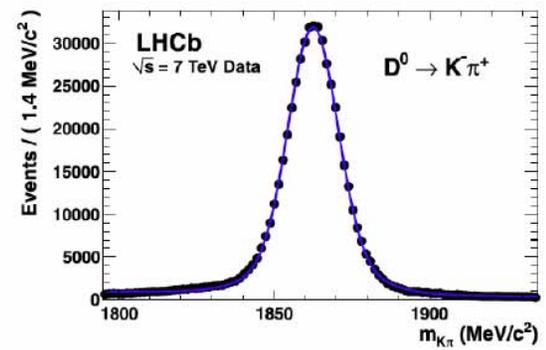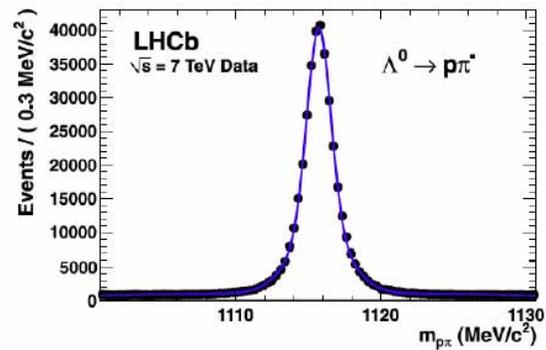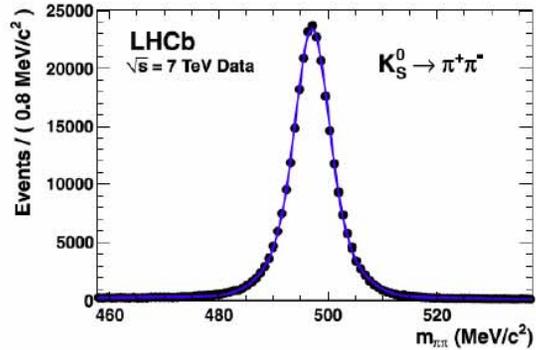

- PID performance evaluated from data
  - Genuine  $\pi/K/p$  samples identified from kinematics only

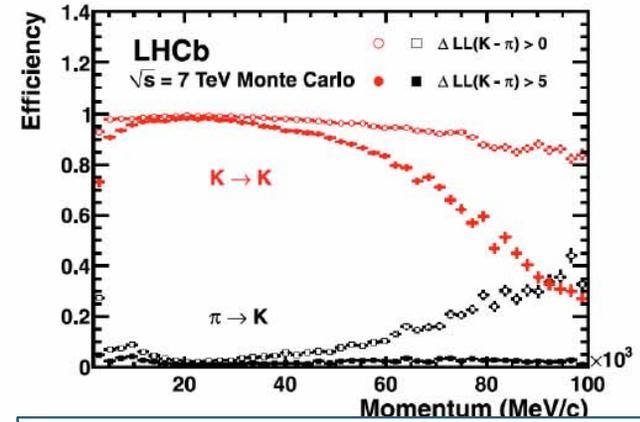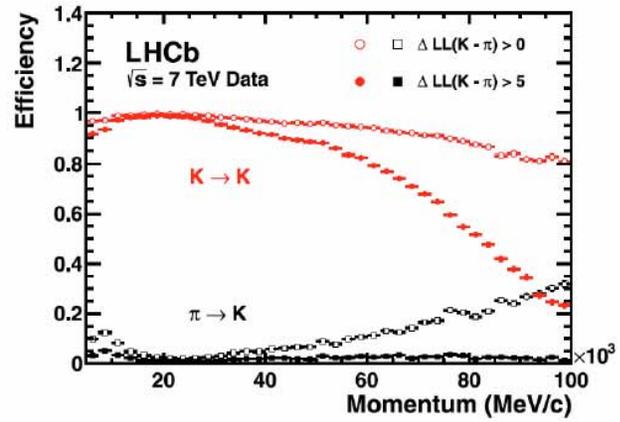


Excellent PID performance,  
exceeds design specifications



## Aerogel resolution




- Single photoelectron resolution for aerogel radiator
- Measured using good quality tracks with momentum  $>10 \text{ GeV}/c$
- Peak not symmetric
- $\sigma \sim 5.6 \text{ mrad}$  (from the FWHM)
  - 1.8 worse than MC

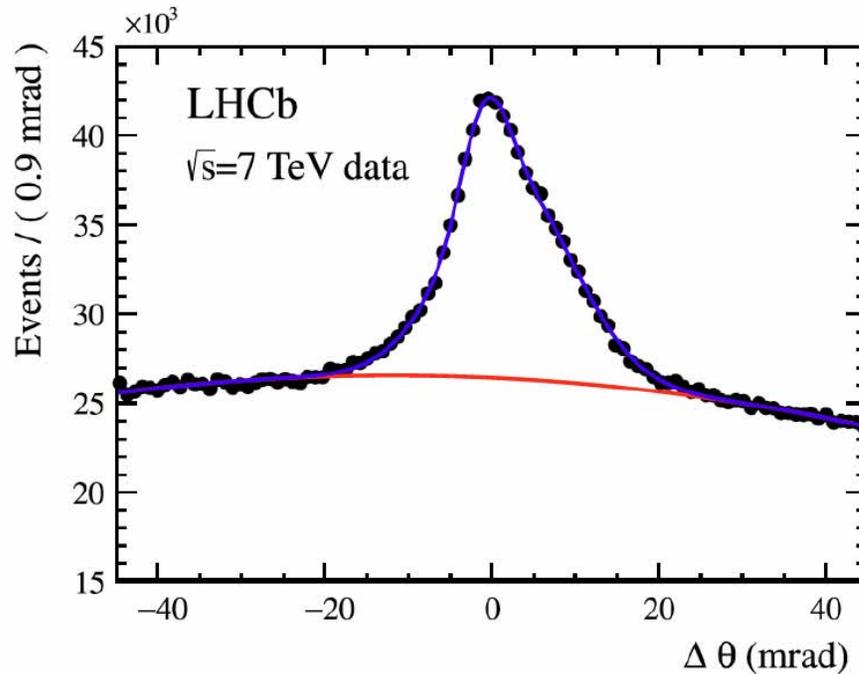

Light yield ( $N_{pe}$ ) about 65% of expectation.


Partly due to aerogel absorbing some  $C_4F_{10}$



## Conclusions



- The LHCb RICH detectors have been operated with high efficiency since the end of 2009 in a high track multiplicity environment
- Particle identification performance has been evaluated with data and exceeds design specifications
  - Most LHCb analyses are using RICH PID information, allowing precise measurements of  $b$  and  $c$  quark decays
- LHCb proposed an important upgrade (after 2018) to cope with  $2 \times 10^{33} \text{ cm}^{-2} \text{ s}^{-1}$  luminosity
  - New photo-detectors and electronics for full detector read-out at 40 MHz
  - Modified RICH-1 optics



## LHCb Upgrade




### ■ Current LHC schedule:

end 2009 – 2012 $\sqrt{s}=7$ TeV until 2011, then 8 TeV $\sim 3 \text{ fb}^{-1}$	2013 – 2014 LS1	2015 – 2017 $\sqrt{s}=13$ TeV, 25 ns target $\sim 5 \text{ fb}^{-1}$	2018 – 2019 LS2 18 months
--	--------------------	--	---------------------------------

- Luminosity @LHCb reached  $\sim 4 \times 10^{32} \text{ cm}^{-2}\text{s}^{-1}$  ( $\mu = 1.6$ )
  - $\times 2$  higher than design value ( $\mu = 0.4$ )
- Plan for an LHCb Upgrade after LS2  $\rightarrow$  fully exploit LHC flavour physics potential (collect  $50 \text{ fb}^{-1}$  in 10 years)
  - Increase luminosity up to  $2 \times 10^{33} \text{ cm}^{-2}\text{s}^{-1}$
  - Upgrade the detector
    - Overcome current limitation of  $\sim 1$  MHz read-out rate  $\rightarrow$  substantial change in LHCb trigger and read-out architecture to read the full detector at 40 MHz


[Letter of Intent \(2011\)](#)  
[Framework TDR \(2012\)](#)




## Particle Identification

**Less is More**

- First muon station (M1) as well as preshower (PS) and scintillating pad detector (SPD) will be removed due to reduced role in upgrade trigger scheme.
- Due to occupancy, aerogel radiator in RICH1 will be removed (leaving  $CF_4$  in RICH1 and  $C_4F_{10}$  in RICH2).

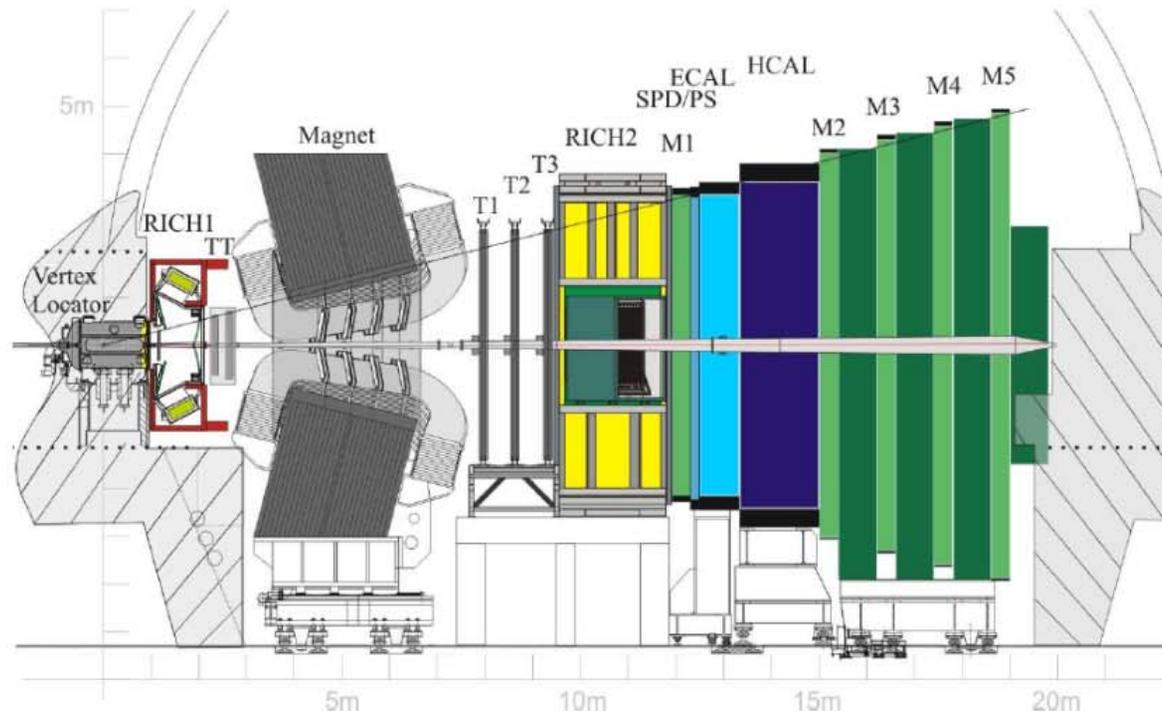


Upgrade of LHCb RICH Detectors, S. Easo, Mon 18:10




## RICH

- ### Photon Detectors
- R&D focussed on MaPMTs, potential candidate is Hamamatsu R11265.
  - Custom readout ASIC (CLARO) being developed (alternative option: Maroc-3).



- ### Operation at $\mathcal{L} = 2 \times 10^{33} \text{cm}^{-2} \text{s}^{-1}$
- Preliminary simulation results indicate high occupancy in RICH1 ( $\gtrsim 30\%$ ).
  - Several ideas to cope with occupancy problem are being discussed, e. g.
    - new optics to spread out the rings,
    - remove RICH1 and adapt RICH2 to encompass two radiator gases.


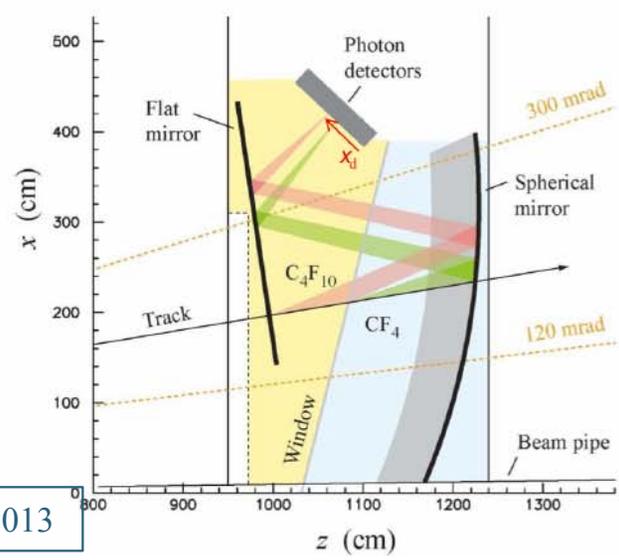





## Proposed RICH Upgrade (2)




- Increase focal length of RICH-1 spherical mirrors in order to halve the occupancy

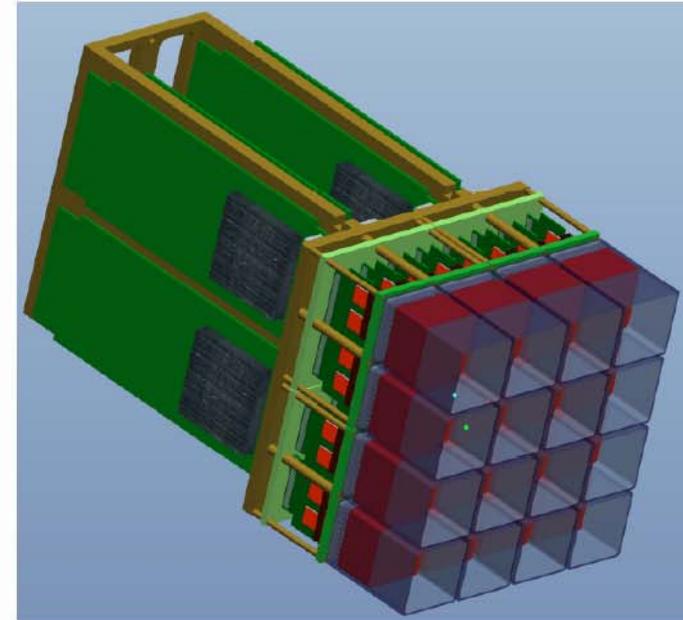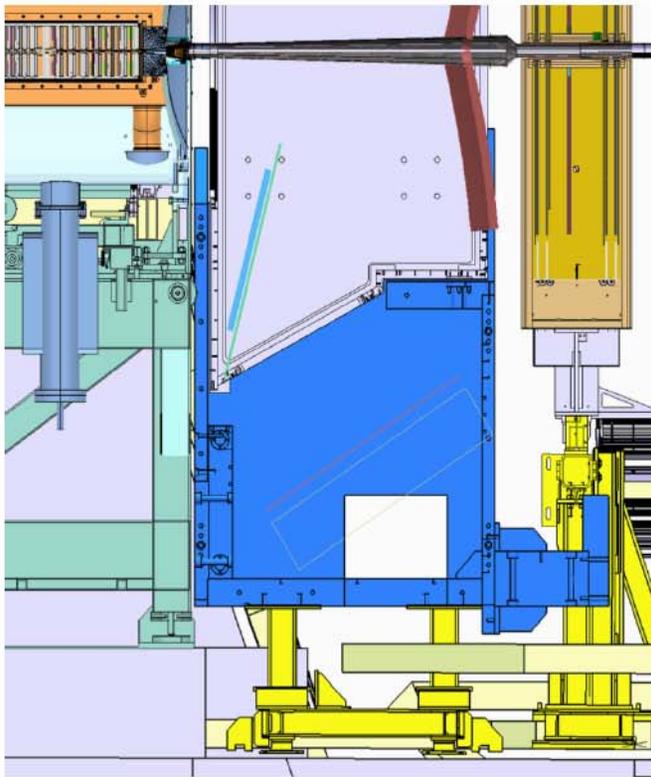

- New Ma-PMT totally modular assemblies
  - A few will be installed already next year for characterization



## LHCb upgrade

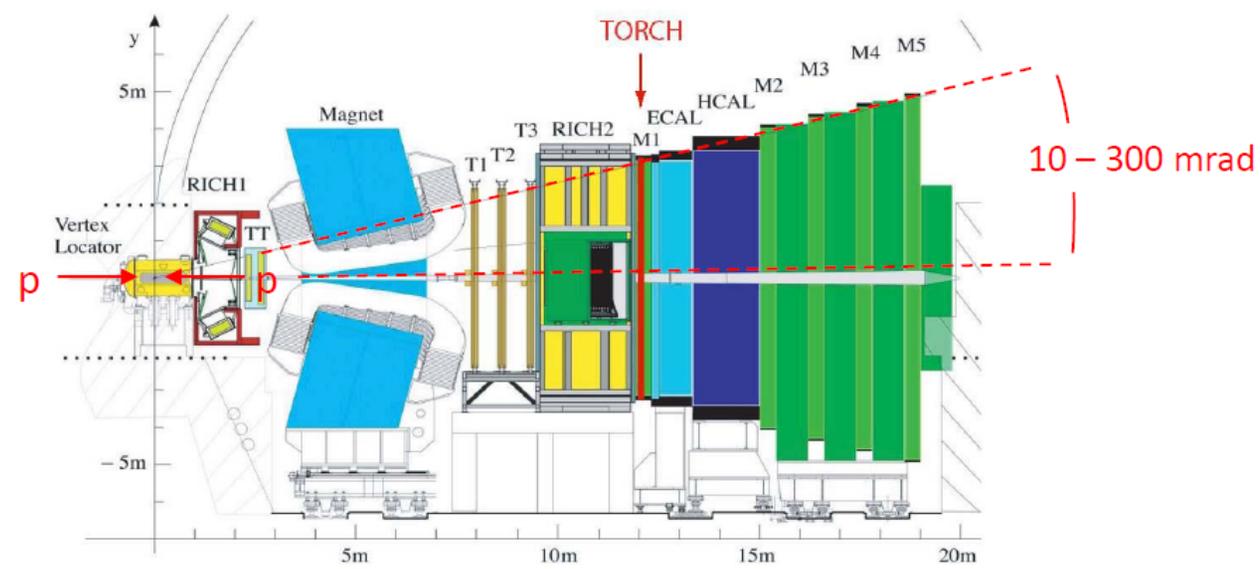


- Upgrade of LHCb approved to increase data rate by an order of magnitude to run at luminosity  $1-2 \times 10^{33} \text{ cm}^{-2} \text{ s}^{-1}$ , for installation in 2018
- Current bottleneck is hardware trigger level that reduces the 40 MHz bunch crossing rate to 1 MHz, for readout into the high-level trigger in a CPU farm  
→ read out *complete* experiment at 40 MHz, fully software trigger
- RICH system will be kept for particle ID, but one radiator removed (aerogel)  
Space for TORCH in place of M1 (which is part of hardware trigger)

Roger Forty, DIRC2013 Workshop

TORCH

4






TORCH - a Cherenkov based Time-of-Flight detector, M. van Dijk, Mon 19:00



24 November 2013

## TORCH

- Particle ID in LHCb for low/intermediate momentum (2-10 GeV/c)
- Large quartz Cherenkov radiator plate (idealised design) with focusing block on top and bottom
- Photons extracted through total internal reflection
- Pions and kaons are separated in time-of-flight due to slightly different mass
- Precise time-of-flight measurement coupled to momentum information leads to identification
- Goal is to provide  $3\sigma$  pion-kaon separation (needs  $<12.5$ ps per-track resolution)

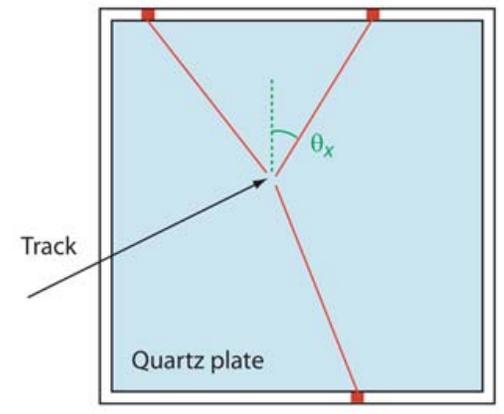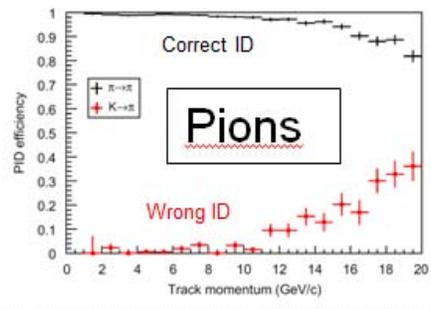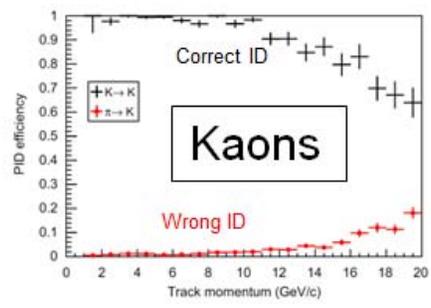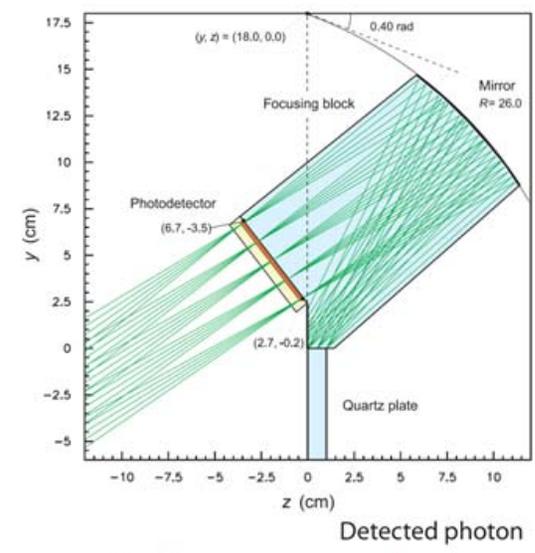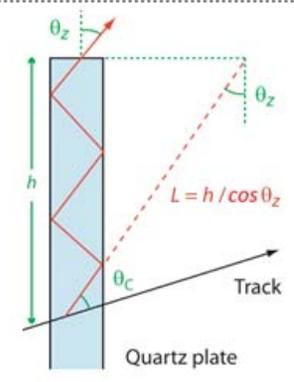


bristol.ac.uk

M. van Dijk

2


TORCH - a Cherenkov based Time-of-Flight detector, M. van Dijk, Mon 19:00



24 November 2013

## TORCH

- Geant simulation of idealised quartz plate and focusing block
- Detector effects to be added in
- Extra (noise) photons detected from secondary tracks (electrons) that also give of Cherenkov radiation
- Width of Cherenkov ring segment due to chromatic dispersion in quartz medium
- Simulation of accumulated photons for a thousand 10 GeV kaons
- More information in "TORCH – a Cherenkov based Time-of-Flight detector" (19:00-19:25)

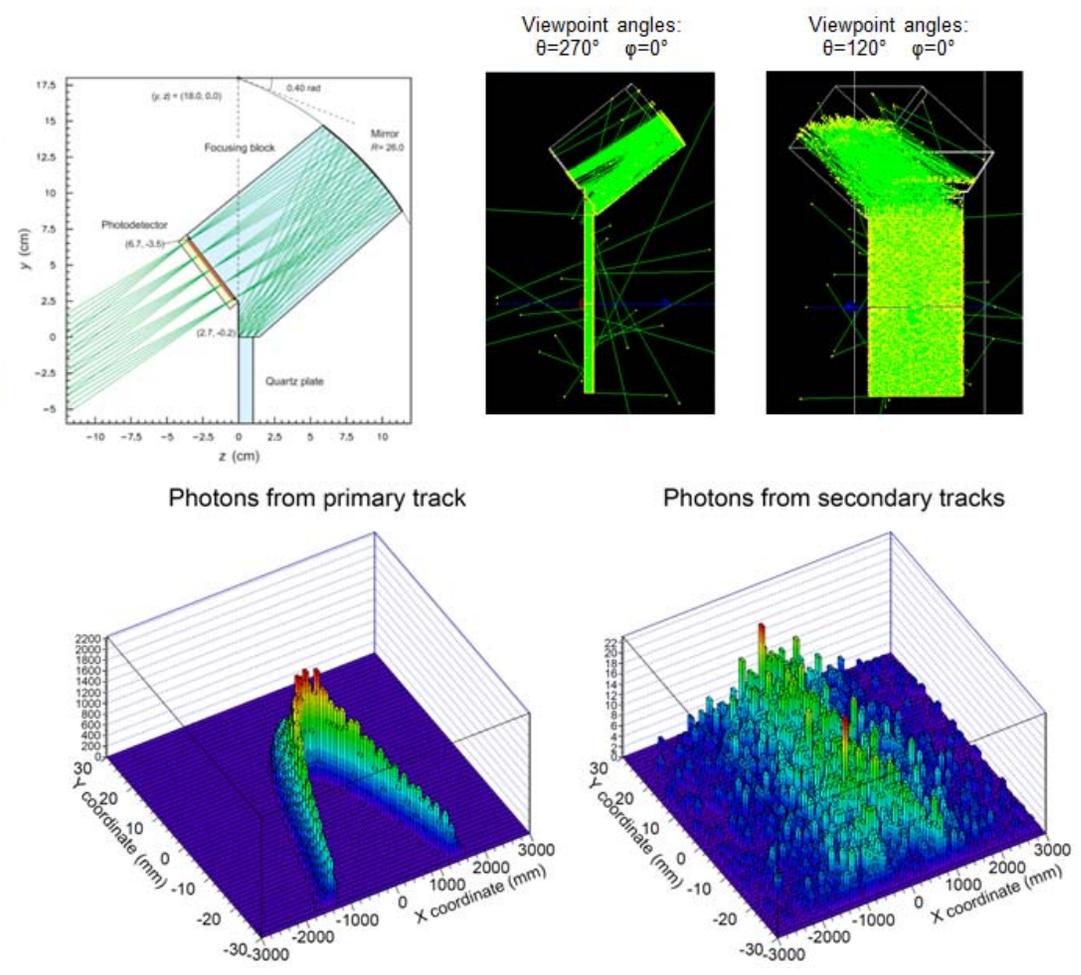


M. van Dijk

3

bristol.ac.uk



TORCH - a Cherenkov based Time-of-Flight detector, M. van Dijk, Mon 19:00



24 November 2013

## TORCH – Experimental developments

- MCP-PMT's are the leading detector for time-resolved photon counting
- TORCH MCP-PMT currently in development at Photek (3 year program)
  - Year 1 – Long life demonstrator
  - Year 2 – High granularity multi-anode demonstrator
  - Year 3 – Fully functioning detector
- Technical aims:
  - Lifetime of 5C/cm<sup>2</sup> accumulated anode charge or better
  - Multi-anode readout of 8x128 pixels
  - Close packing on two opposing sides, fill factor 88% or better (53mm working width within 60 mm envelope)
- Development currently progressing well
  - Delivery of long-life demonstration tubes complete
  - Lifetime and time resolution tests currently underway
- See posters on TORCH MCP-PMT's for more info
  - T. Gys (CERN)
  - J. Milnes & T. Conneely (Photek)

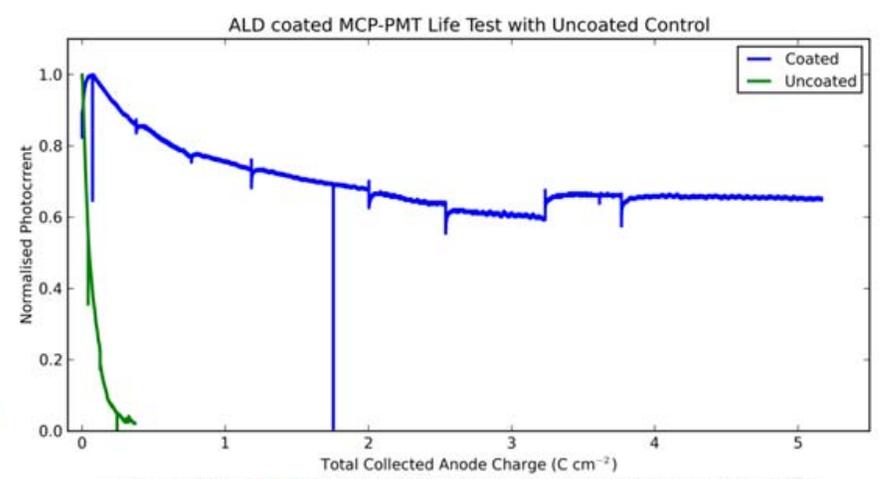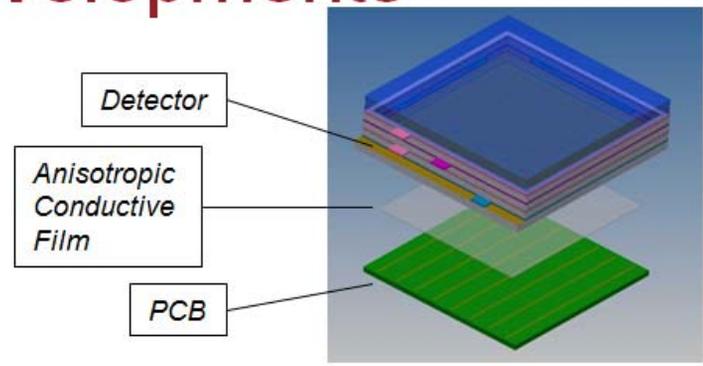

Test of relative efficiency as a function of collected anode charge. Breaks in the plot were created when the detector was taken out of the setup for other testing.

M. van Dijk

4

bristol.ac.uk



TORCH - a Cherenkov based Time-of-Flight detector, M. van Dijk, Mon 19:00

# ALICE HMPID/VHMPID



## PID in ALICE


- ALICE specifically designed to study Quark-Gluon Plasma in "heavy ion collisions" at LHC, pp studies relevant part of the physics program
- Excellent PID capabilities by combining different techniques over a large momentum range

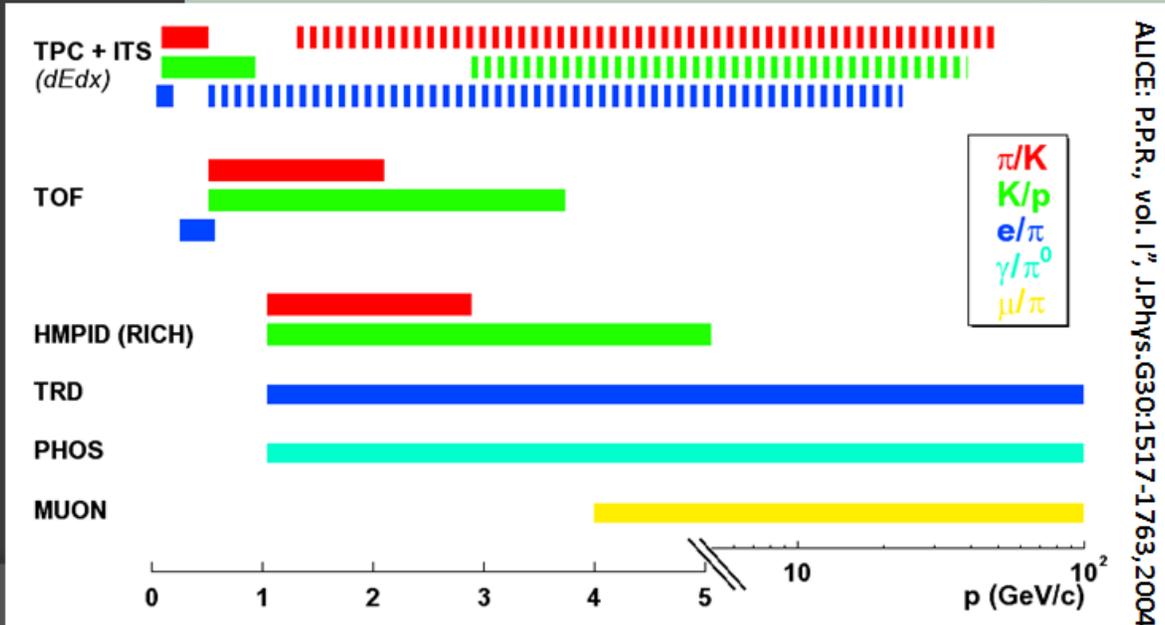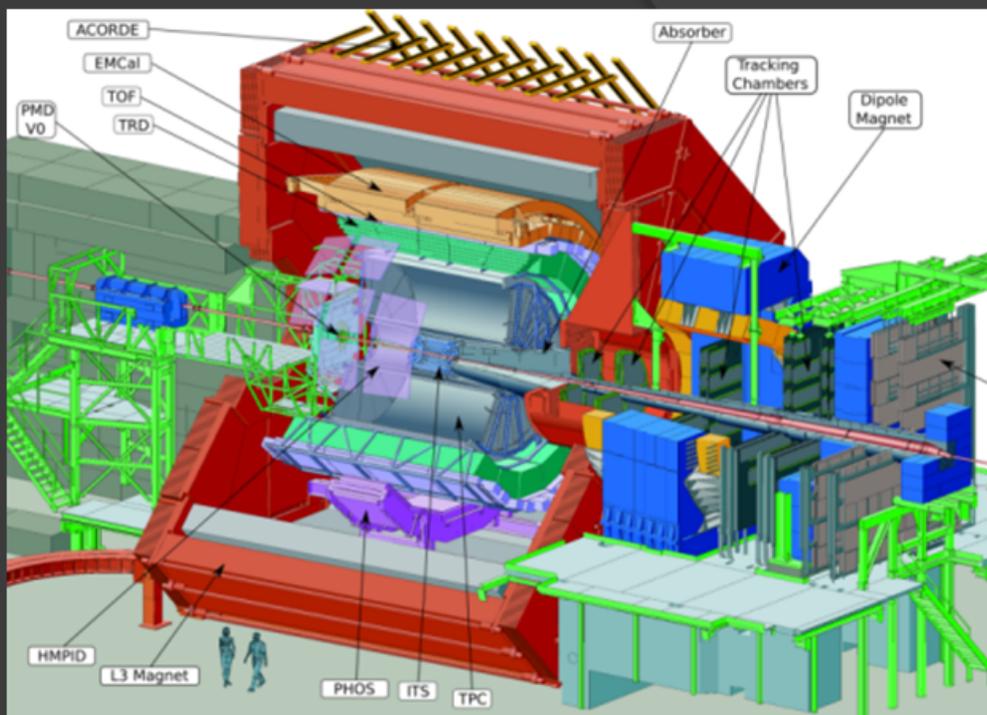


ALICE: P.P.R., vol. 1, J.Phys.G30:1517-1763,2004

*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
 M. Weber, Mon 16:35

*ALICE-HMPID performance during the LHC run period 2010-2013,*  
 G. de Cataldo, Mon 14:25



## THE HMPID principle



Proximity focusing, 8 cm gap

### RADIATOR


15 mm liquid  $C_6F_{14}$ ,  
 $n \sim 1.2989$  @ 175nm,  $\beta_{th} = 0.77$

### PHOTON CONVERTER

Reflective layer of CsI  
QE  $\sim 25\%$  @ 175 nm.


### PHOTOELECTRON DETECTOR

- MWPC with  $CH_4$  at atmospheric pressure (4 mm gap) HV = 2050 V.
- Analogue pad readout

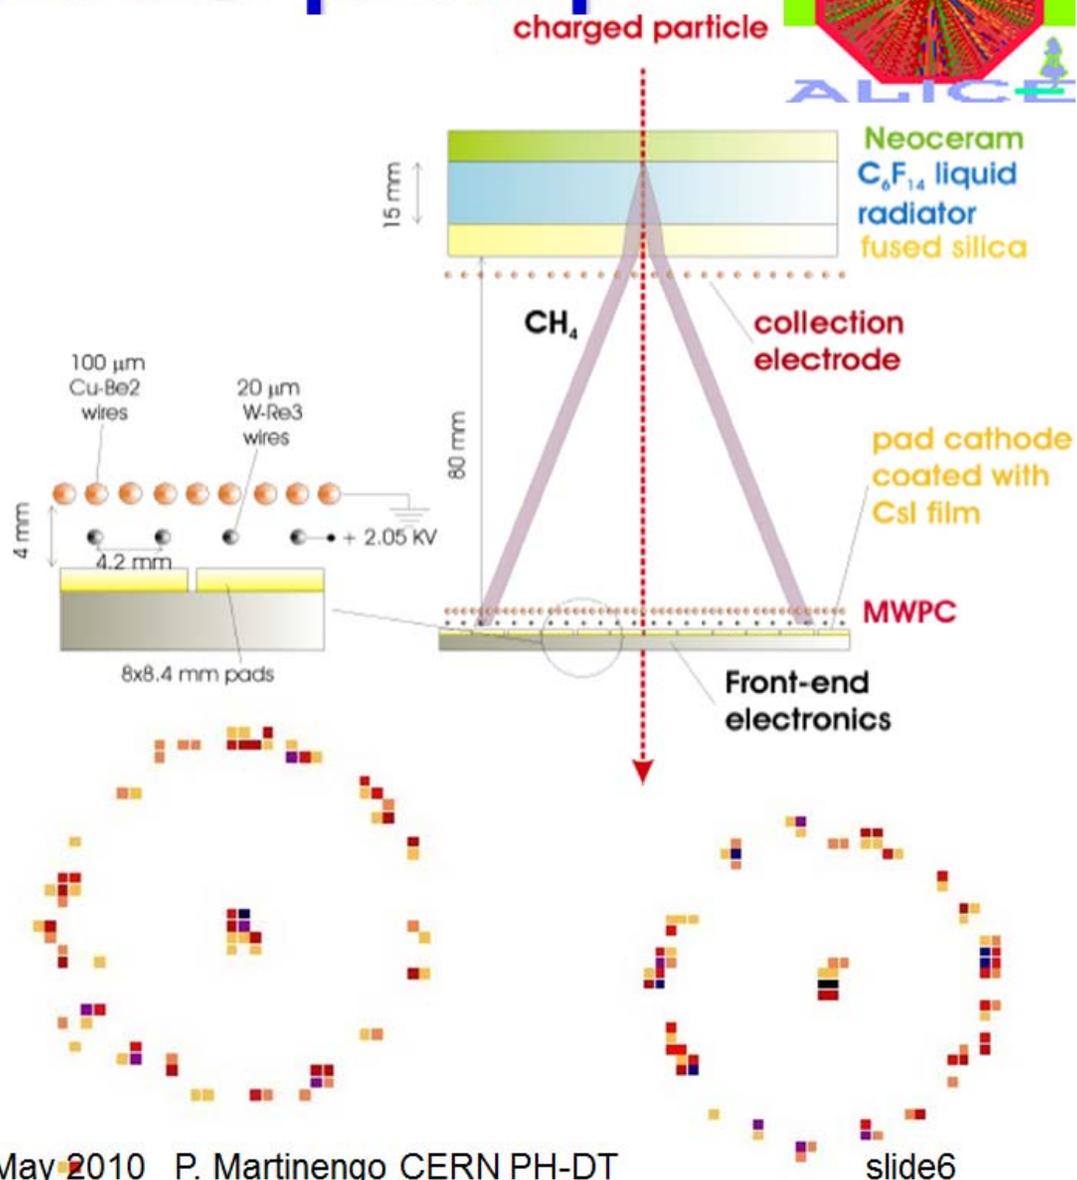


*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
M. Weber, Mon 16:35

*ALICE-HMPID performance during the LHC run period 2010-2013,*  
G. de Cataldo, Mon 14:25



# ALICE HMPID/VHMPID

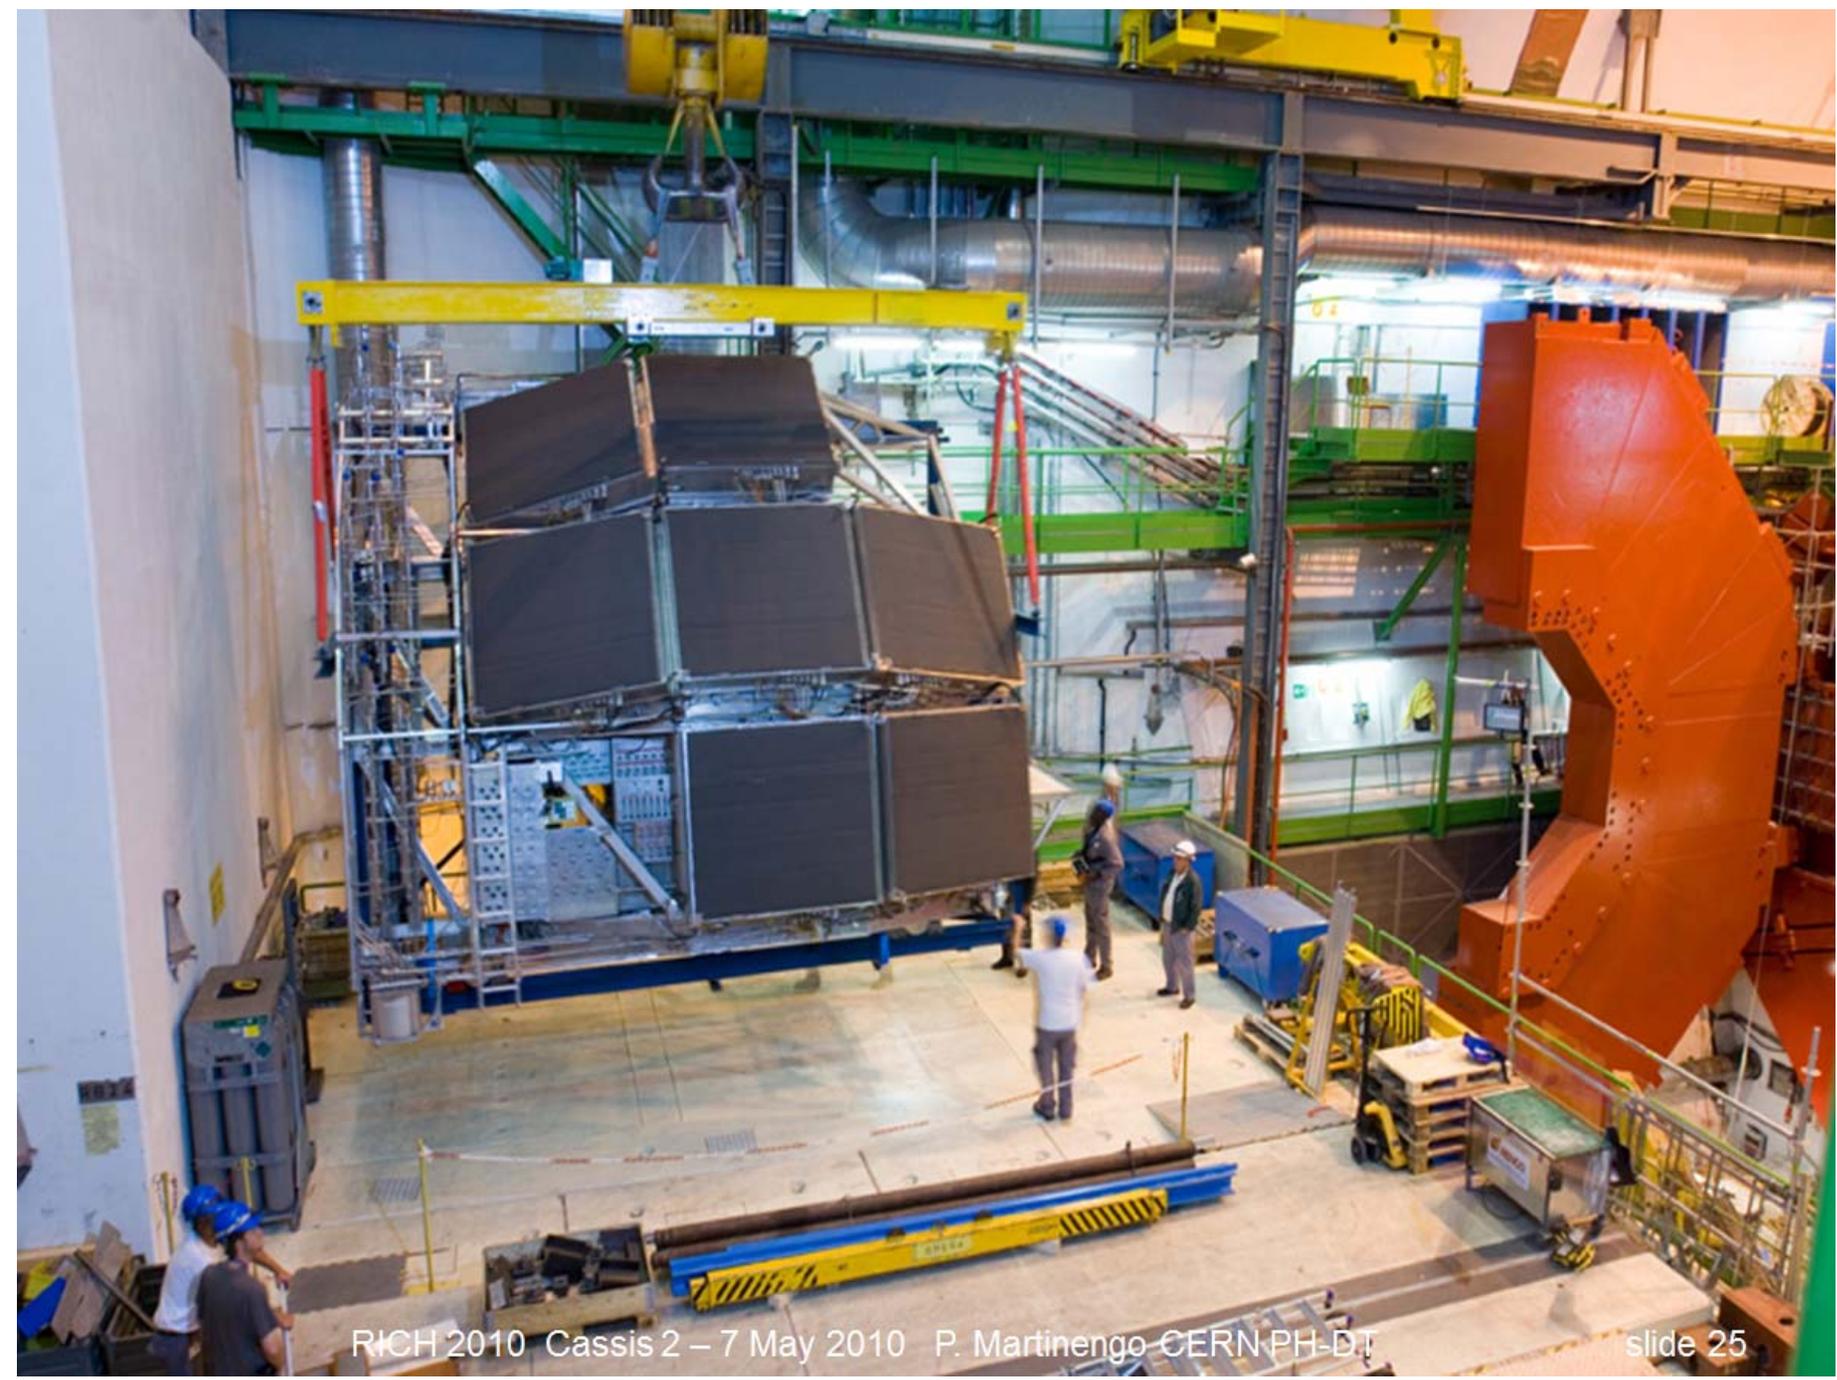

RICH 2010 Cassis 2 – 7 May 2010 P. Martinengo CERN PH-DT



slide 25

*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
M. Weber, Mon 16:35

*ALICE-HMPID performance during the LHC run period 2010-2013,*  
G. de Cataldo, Mon 14:25



# Baseline detector principle scheme

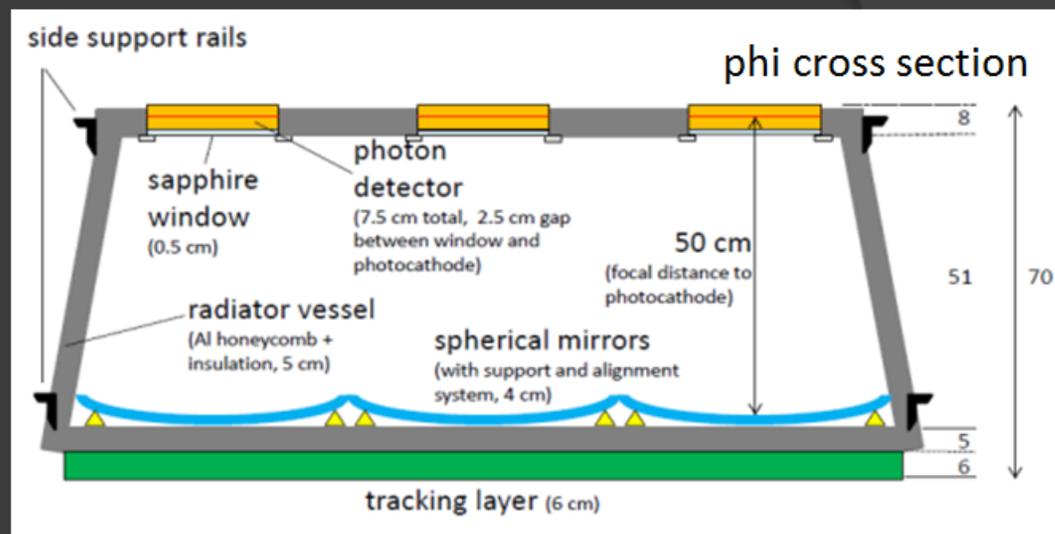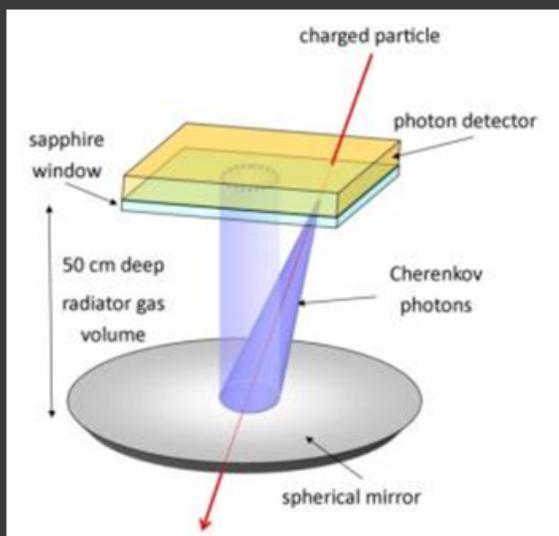

- Focusing RICH,  $C_4F_8O$  gaseous radiator  $L \sim 50$  cm, operated at 1-3.5 bar
- Al honeycomb radiator vessel, 4 mm sapphire window with A/R coating
- HMPID-like photon detector: MWPC with CsI pad segmented photocathode, operated with  $CH_4$ ; pad size  $4 \times 8$  mm<sup>2</sup>, 20  $\mu$ m anode wires, 0.8 mm gap, 4 mm pitch
- 50x50 cm<sup>2</sup> spherical mirror, light C-fiber substrate, Al/MgF<sub>2</sub> coating
- CCC tracking layers with strip chambers
- FEE with analogue readout for centroid measurement, three options:
  - HMPID Gassiplex chip with T/H, modified version from COMPASS RICH (max 500 KHz trigger rate)
  - APV25 with continuous sampling at 40 MHz, as used in COMPASS RICH and HADES RICH upgrades
  - new common FEE developments for ALICE high-lumi upgrade


13/02/2013

A. Di Mauro - VCI2013




8/30

*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
M. Weber, Mon 16:35

*ALICE-HMPID performance during the LHC run period 2010-2013,*  
G. de Cataldo, Mon 14:25



## Detector layout and integration in ALICE

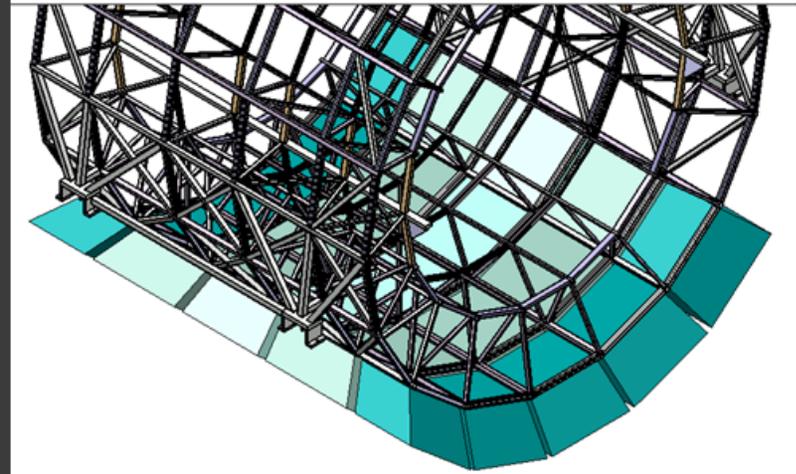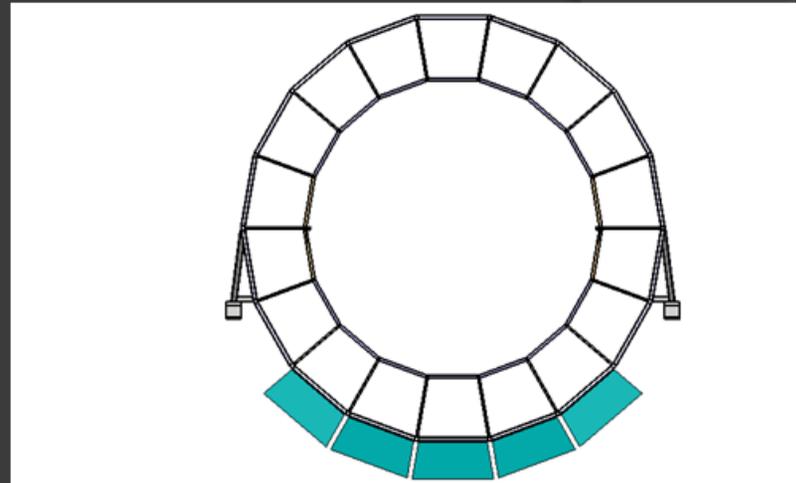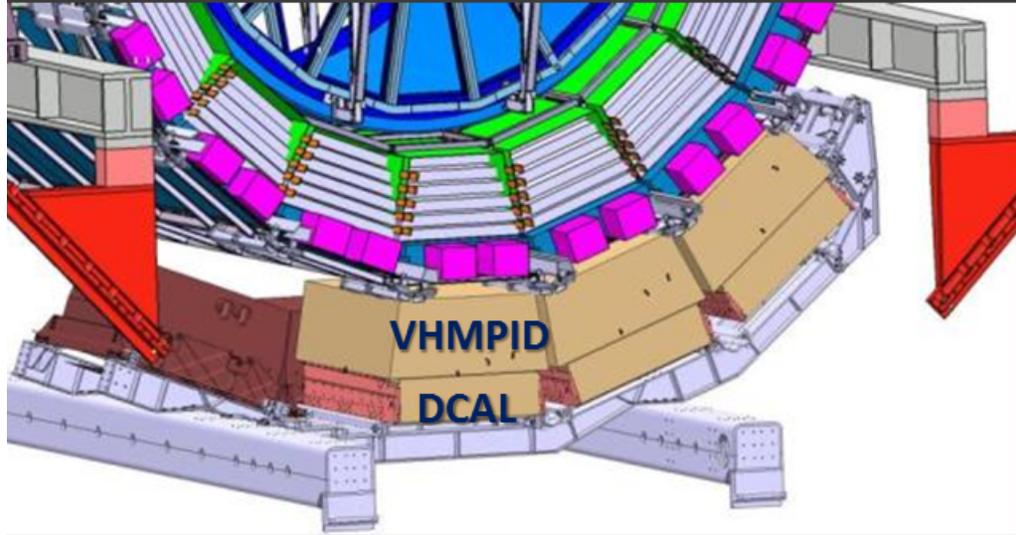


- Module arrangement under study
- 5 Central modules, size  $\sim 1.4 \times 1.7 \times 0.7 \text{ m}^3$
- 10 Side modules, size:  $\sim 2.7 \times 1.7 \times 0.7 \text{ m}^3$

*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
M. Weber, Mon 16:35





*ALICE-HMPID performance during the LHC run period 2010-2013,*  
G. de Cataldo, Mon 14:25

**ALICE** Testbeam with pressurized C<sub>4</sub>F<sub>8</sub>O radiator (Oct 2012)


The first 15 events for C<sub>4</sub>F<sub>8</sub>O at 3.5 bara with 6 GeV/c π beam

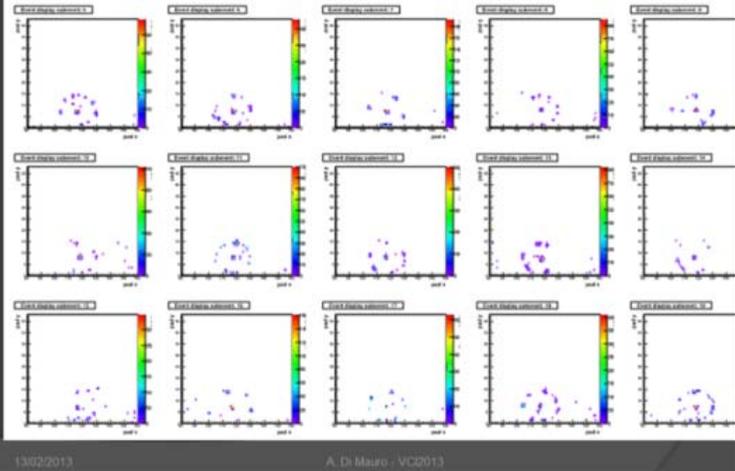

**ALICE** Testbeam with pressurized C<sub>4</sub>F<sub>8</sub>O radiator (Oct 2012)

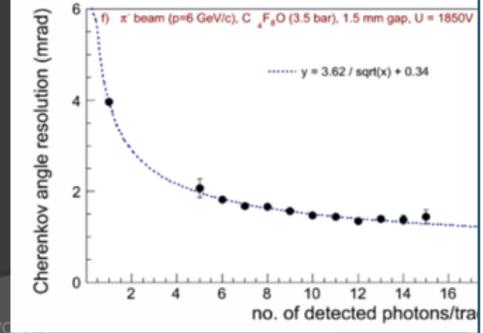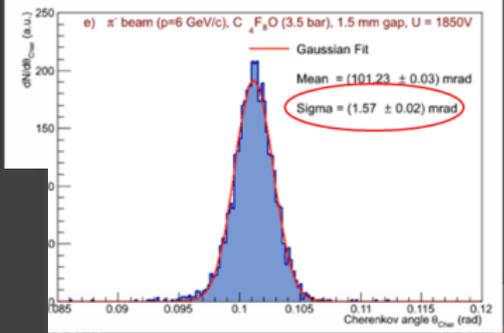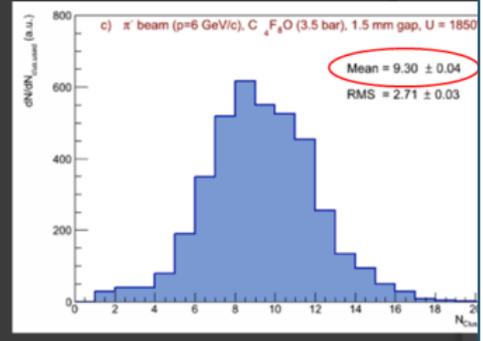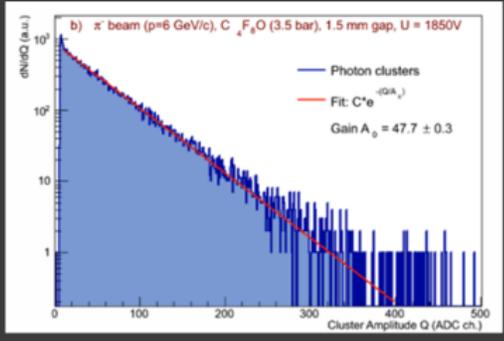


**ALICE** Testbeam with pressurized C<sub>4</sub>F<sub>8</sub>O radiator (Oct 2012)

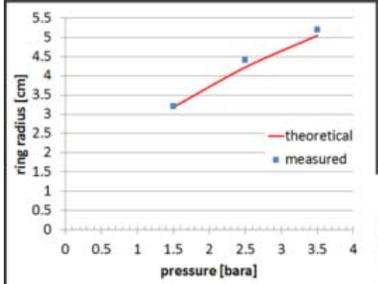


C<sub>4</sub>F<sub>8</sub>O refractive index in UV ~ C<sub>4</sub>F<sub>10</sub>, simulation are in progress to deduce exact parameterization

Few % K's contamination: detected and identified

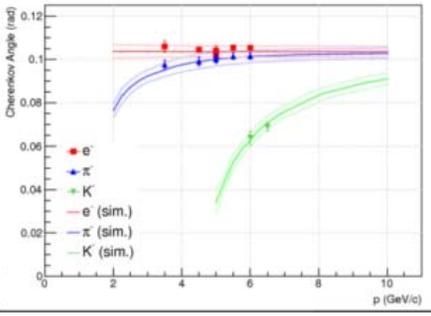

R&D on high momentum particle identification with a pressurized Cherenkov radiator, M. Weber, Mon 16:35


ALICE-HMPID performance during the LHC run period 2010-2013, G. de Cataldo, Mon 14:25



## Summary

track-by-track PID in high momentum regime

requires

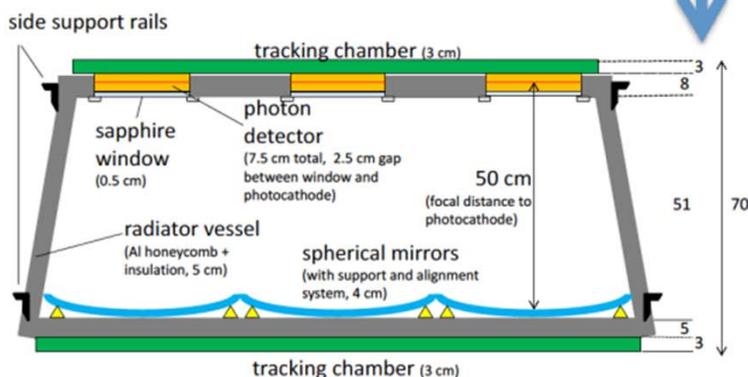


### pressurized gaseous RICH:

- Radiator: 3.5 bar  $C_4F_8O$  (50 cm)
- Photon detector: CsI-MWPC ( $CH_4$ )
- Window: Sapphire
- Mirrors: 3x3


R&D

- smaller anode-cathode gap and pad size
- Excellent chamber performance (Number of photons  $\sim 10$ )
- Excellent Cherenkov angle resolution ( $\sim 1.5$  mrad)
- Photon detection alternatives (GEM, MCP)

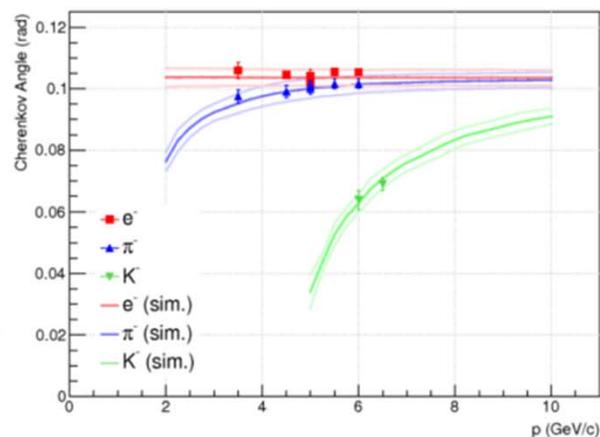

*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
M. Weber, Mon 16:35

*ALICE-HMPID performance during the LHC run period 2010-2013,*  
G. de Cataldo, Mon 14:25




## Summary and outlook


- Intense R&D campaign has been performed in 2011/12 to meet new design requirements
- Successful tests of  $C_4F_8O$  as Cherenkov radiator in UV, proven preliminary design concepts for pressurization/heating
- Baseline solution for photon-detector: CsI-MWPC with thin gap; new prototype with final layout successfully tested in Dec '12
- Further activities
  - continue tests on CsI-TGEM and Planacon, for “faster” detector option
  - FEE and readout electronics development
  - engineering studies on vessel structure and mirror system
- Lol submitted this week to the ALICE Collaboration, final decision in March

*R&D on high momentum particle identification with a pressurized Cherenkov radiator,*  
M. Weber, Mon 16:35


*ALICE-HMPID performance during the LHC run period 2010-2013,*  
G. de Cataldo, Mon 14:25





## The Hybrid Optics Design

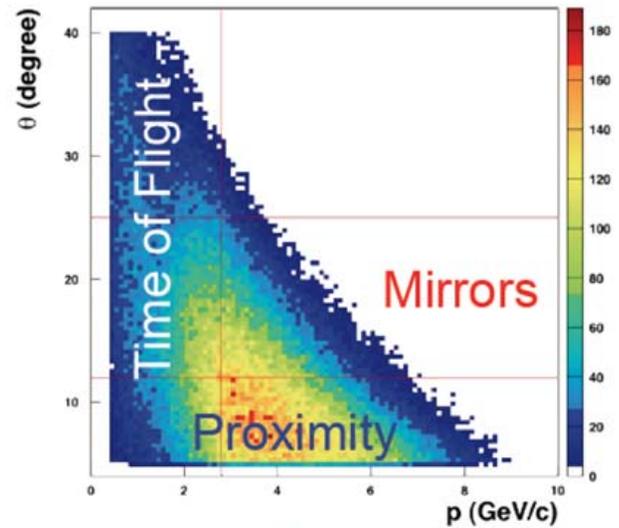

Direct rings/best performance for high momentum particles

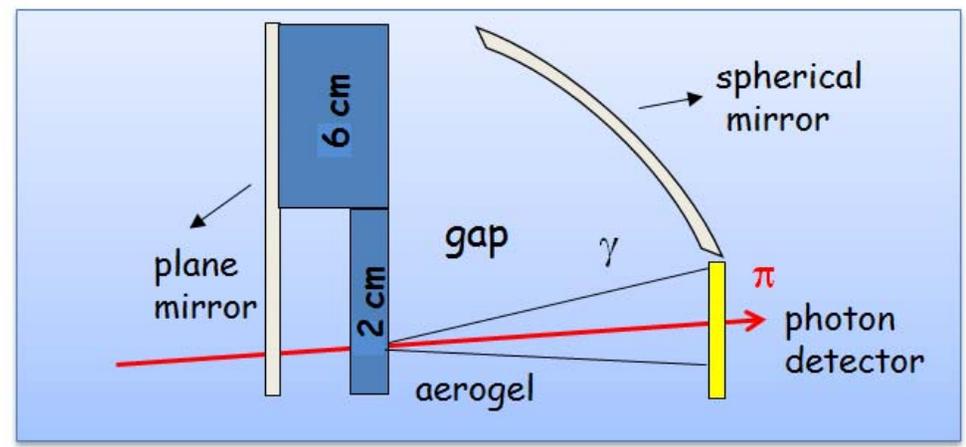

Reflected rings for less demanding low momentum particles

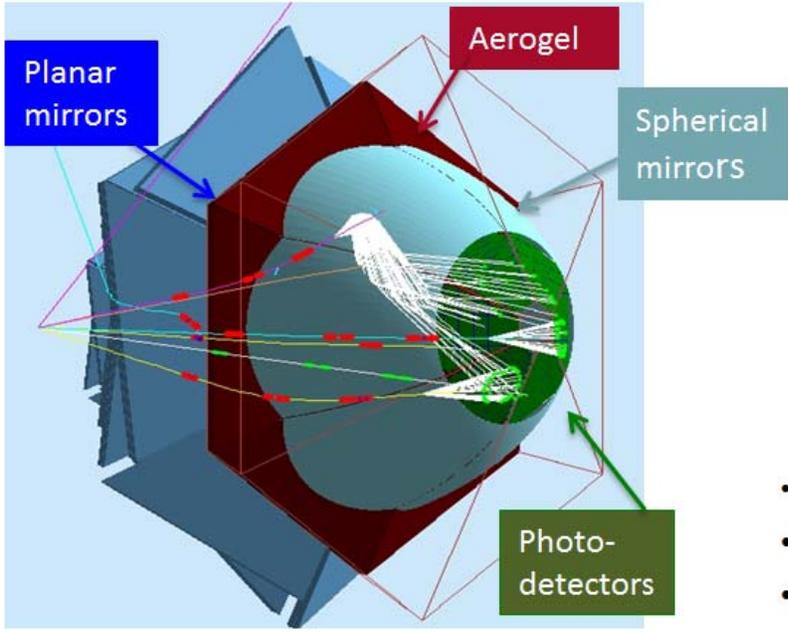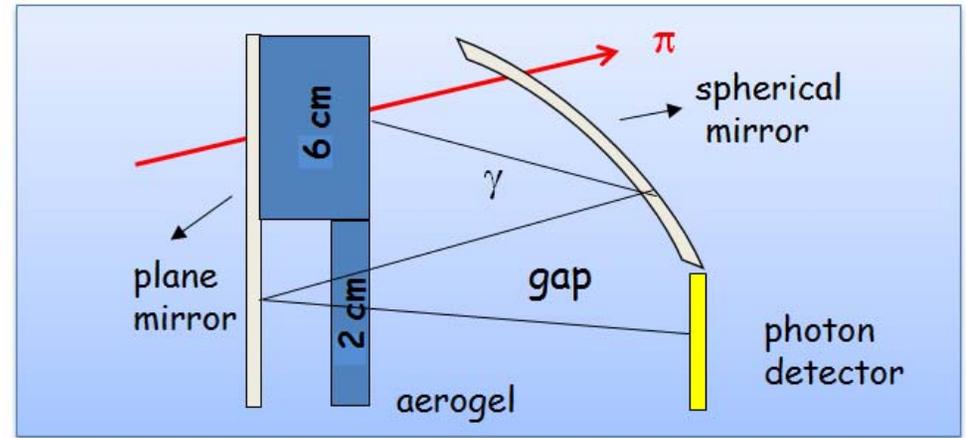

- Minimize active area (cost) to about 1 m<sup>2</sup>
- Material budget concentrated where TOF is less effective
- Focalizing mirrors allow thick radiator for good light yield



The large-area hybrid-optics CLAS12 RICH detector, M. Contalbrigo, Mon 14:50







## The CLAS12 RICH

CLAS12 Detector at Jefferson Lab  
3D structure of the nucleon by polarized deep-inelastic scattering

Forward RICH: 2 sectors to accomplish physics program, 1<sup>st</sup> sector by the end of 2016

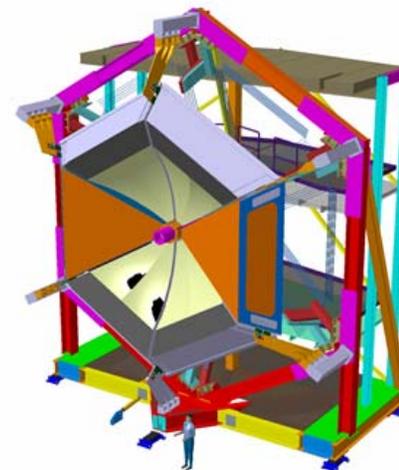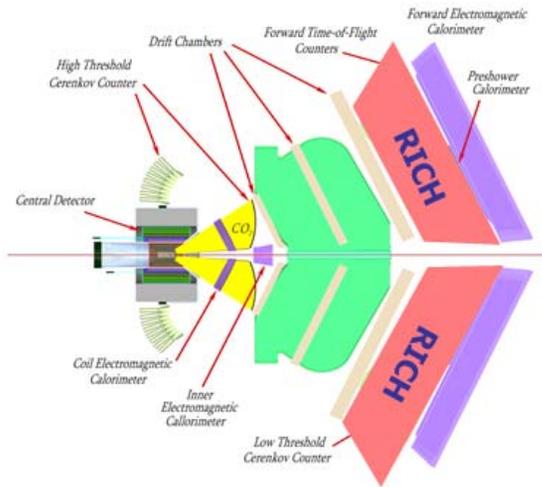

4 $\sigma$  hadron separation in the 3-8 GeV/c momentum range required to achieve flavor sensitivity  
Hybrid optics to fit into CLAS12 clearance and limit the active area cost

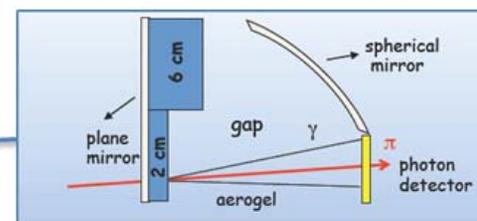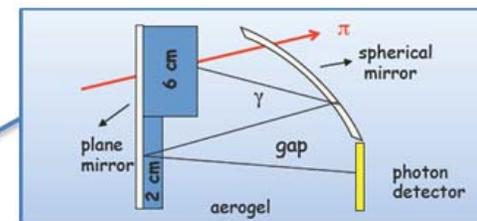
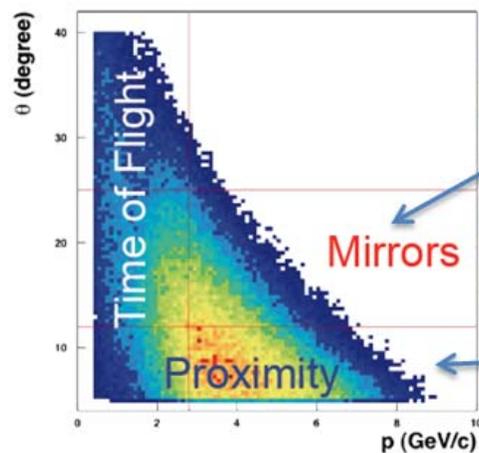
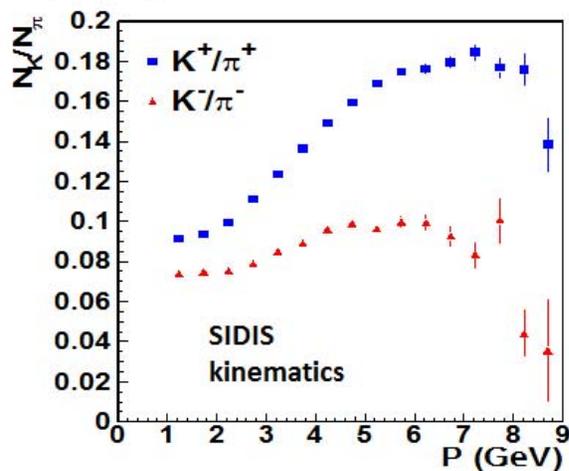


The large-area hybrid-optics CLAS12 RICH detector, M. Contalbrigo, Mon 14:50

# CLAS12 RICH





## Component Tests

### Aerogel Radiator

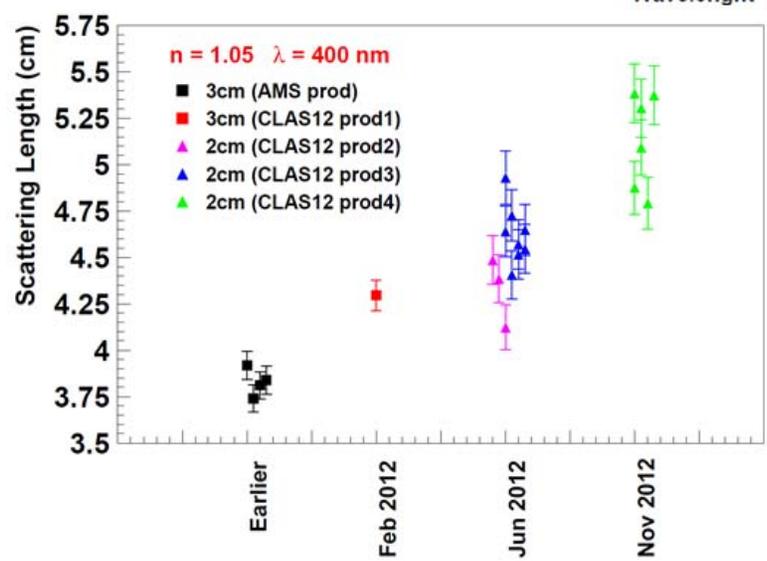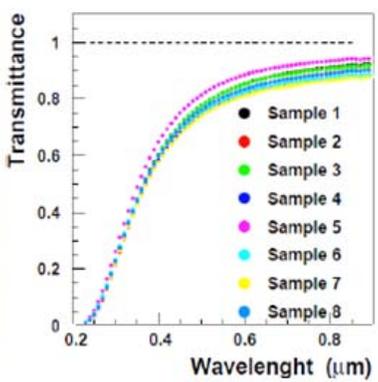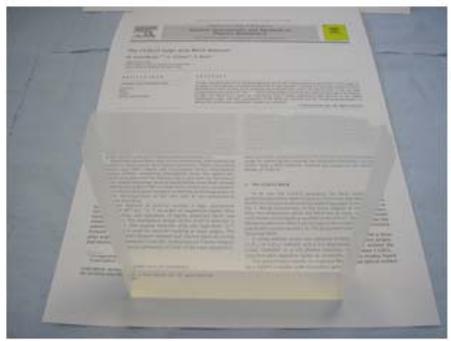


Achieved clarity for large tiles at  $n=1.05$   
 $\sim 0.00050 \mu\text{m}^4 \text{cm}^{-1}$   
 Budker and Boreskov Institute of Novosibirsk

### Photon Detection

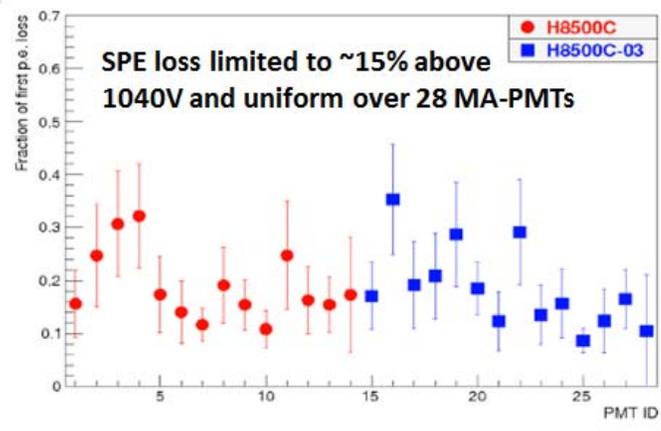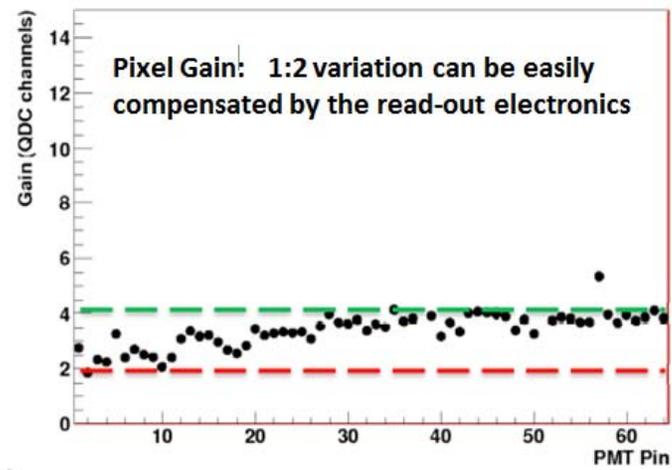


The large-area hybrid-optics CLAS12 RICH detector, M. Contalbrigo, Mon 14:50






## Prototype Results


### Direct light detection

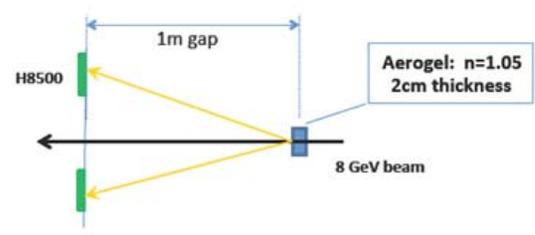


### Reflected light detection

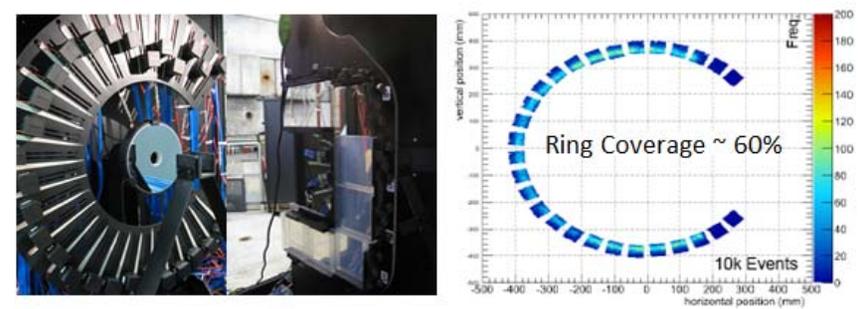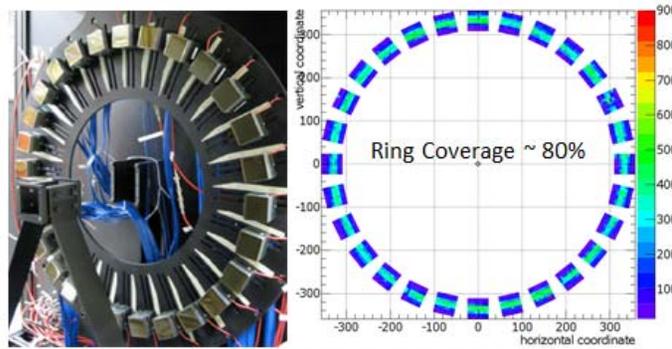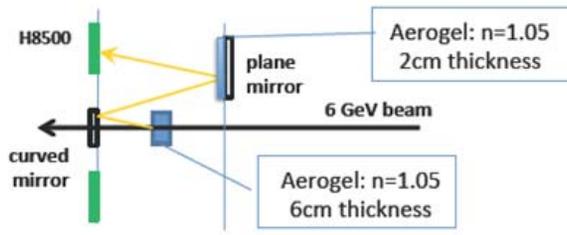

### Separation up to the CLAS12 maximum momentum

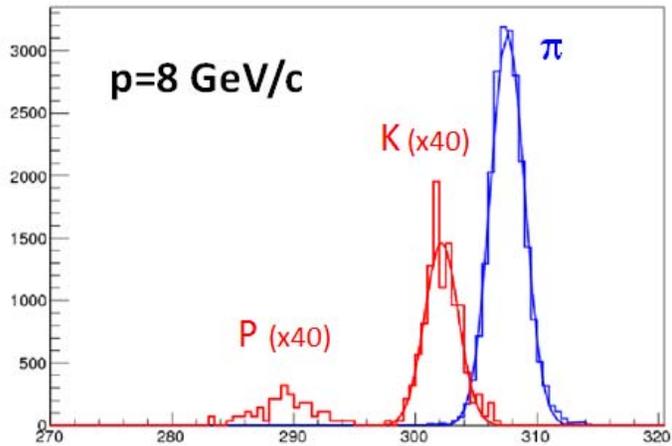

### Acceptable light loss without resolution degradation

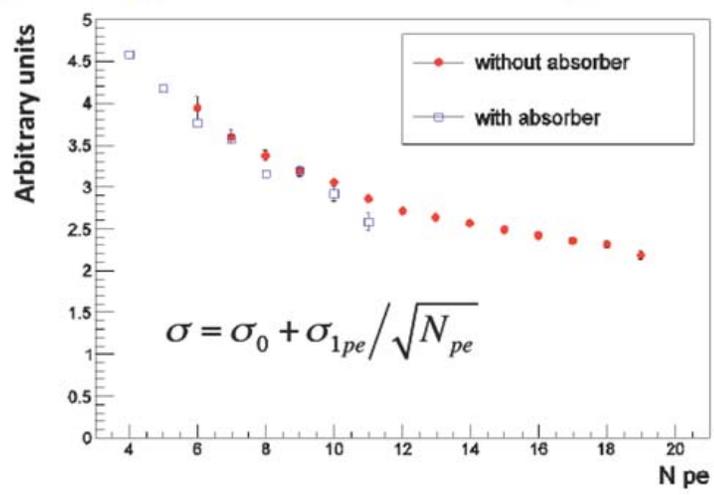


The large-area hybrid-optics CLAS12 RICH detector, M. Contalbrigo, Mon 14:50







## The CLAS12 Hadron ID

One charged particle per sector in average:

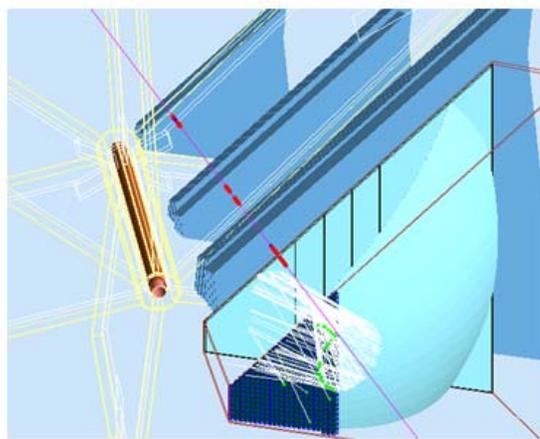


Non trivial RICH light patten due to reflections:  
patter recognition and likelihood ID required

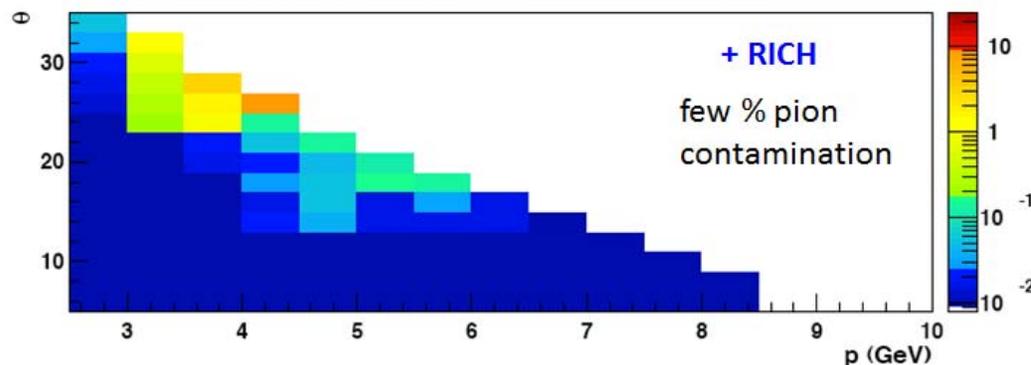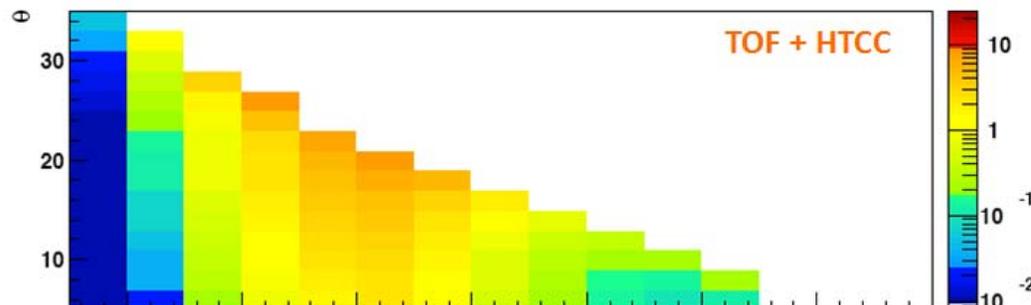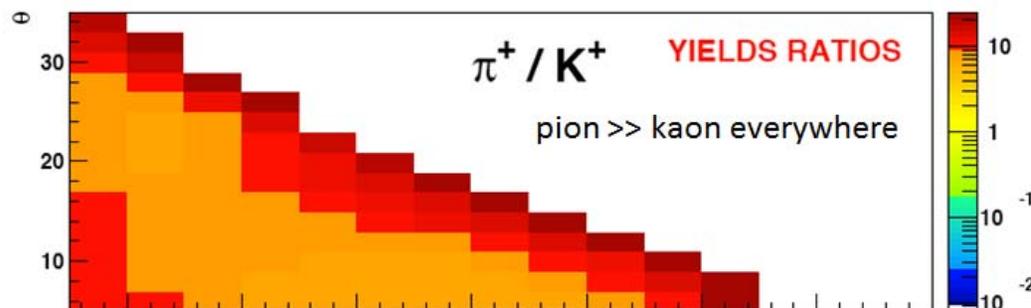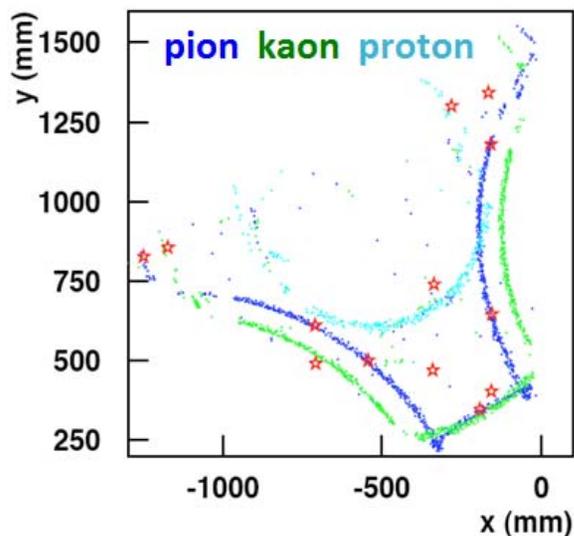

Even with a not yet optimized tuning of pattern recognition and likelihood ID, the  $\pi$  contamination is of the order of 1%


The large-area hybrid-optics CLAS12 RICH detector, M. Contalbrigo, Mon 14:50



## FARICH concept

### Focusing Aerogel RICH – FARICH


Improves proximity focusing design by reducing radiator thickness contribution into the Cherenkov angle resolution

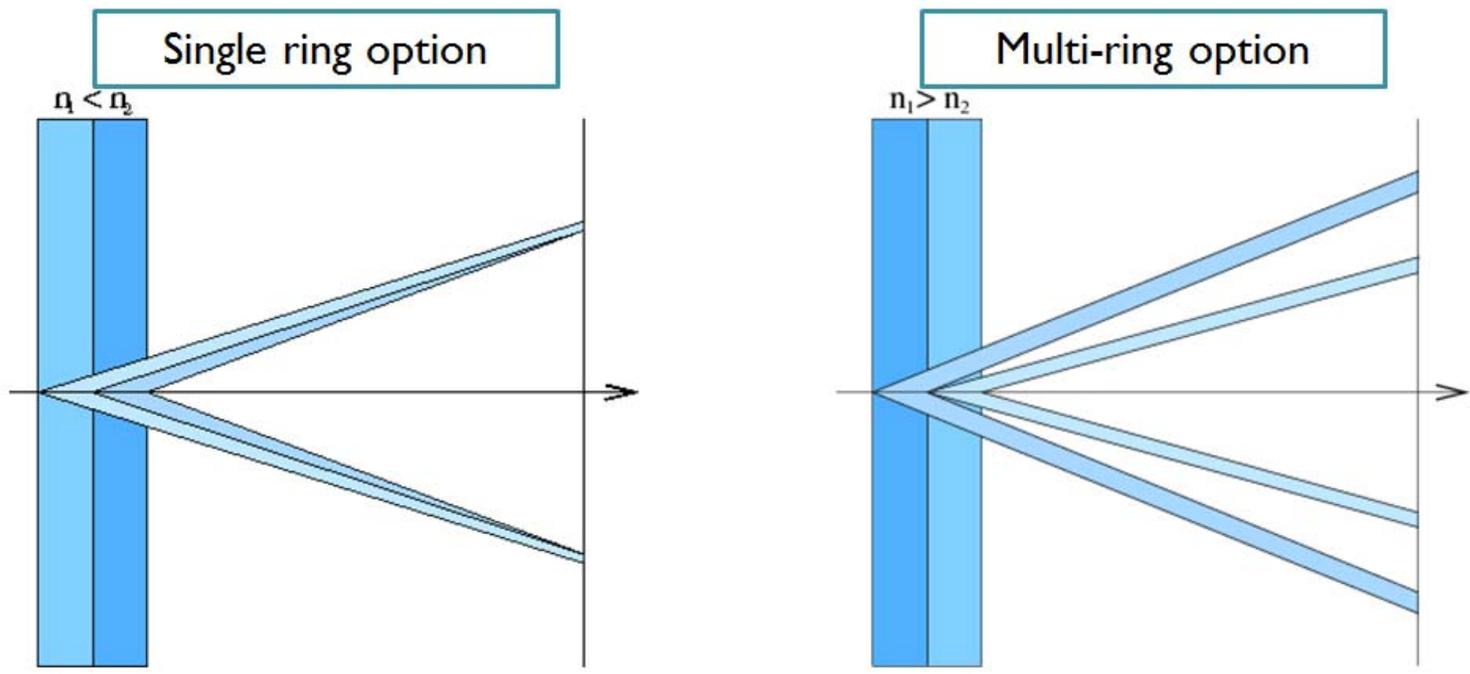

T.Iijima et al., NIM A548 (2005) 383  
A.Yu.Barnyakov et al., NIM A553 (2005) 70



13/02/2013 VCI 2013

*Tests of FARICH prototype with fine photon position detection,  
E.A. Kravchenko, Mon 16:10*




## Multi-layer 'focusing' aerogels

- Produced by Boreskov Institute of Catalysis (Novosibirsk) in cooperation with Budker Institute since 2004

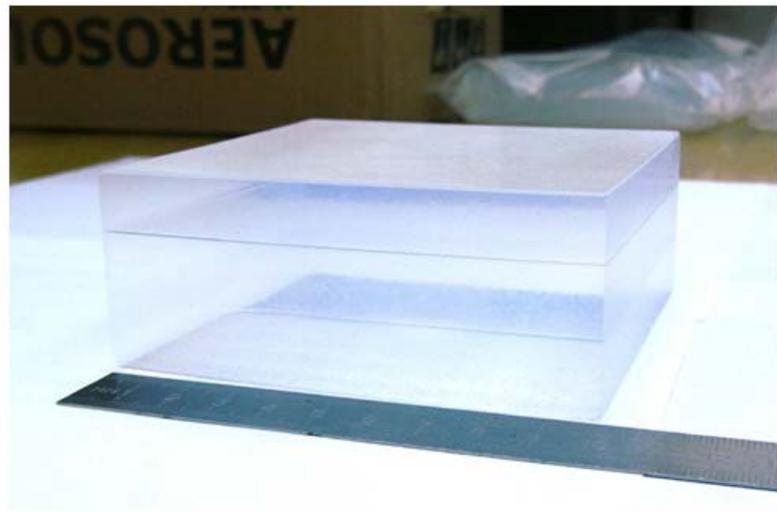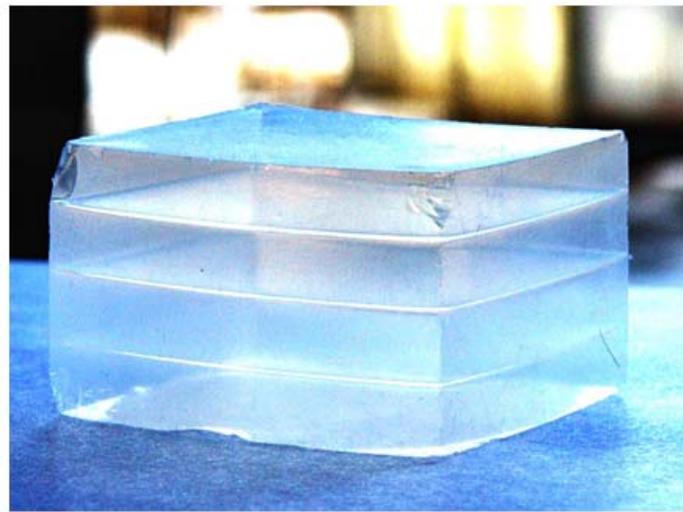


First 4-layer sample produced in 2004  
A.Yu.Barnyakov et al., NIM A553 (2005) 70


*Tests of FARICH prototype with fine photon position detection,  
E.A. Kravchenko, Mon 16:10*




## FARICH projects and proposals

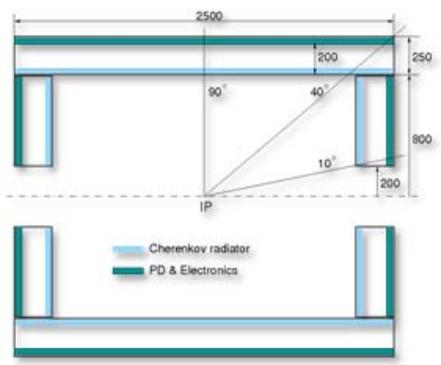

**FARICH for Super Charm-Tau Factory (Novosibirsk)**  
Particle ID:  $\mu/\pi$  up to 1.7 GeV/c  
21 m<sup>2</sup> detector area (SiPMs)  
~1M channels

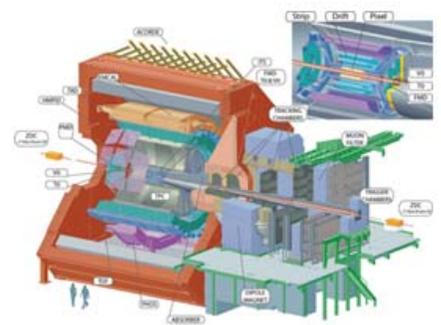

**FARICH for ALICE HMPID upgrade**  
Particle ID:  $\pi/K$  up to 10 GeV/c,  $K/p$  up to 15 GeV/c  
3m<sup>2</sup> detector area (SiPMs)

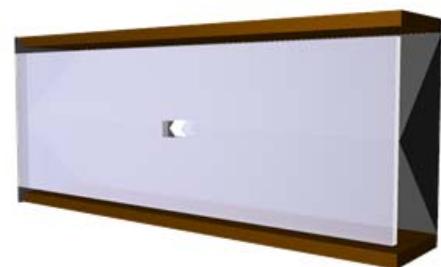

**Forward Spectrometer RICH for PANDA**  
Particle ID:  $\pi/K/p$  up to 10 GeV/c  
3m<sup>2</sup> detector area (MaPMTs or SiPMs)

*Tests of FARICH prototype with fine photon position detection,  
E.A. Kravchenko, Mon 16:10*



Sensor array: Philips digital SiPM cooled to -40C

## FARICH prototype with DPC...




- ### 4-layer aerogel
- $n_{\max} = 1.046$
  - Thickness 37.5 mm
  - Calculated focal distance 200 mm
  - Hermetic container with plexiglass window to avoid moisture condensation on aerogel



- ### Square matrix $20 \times 20 \text{ cm}^2$
- Sensors: DPC3200-22-44
  - $3 \times 3$  modules =  $6 \times 6$  tiles =  $24 \times 24$  dies =  $48 \times 48$  pixels in total
  - 576 time channels
  - 2304 amplitude (position) channels
  - 4 levels of FPGA readout: tiles, modules, bus boards, test board




Tests of FARICH prototype with fine photon position detection, E.A. Kravchenko, Mon 16:10




## FARICH-PDPC: Particle ID

Ring radius distribution

$$S(\pi/K) = \frac{R_\pi - R_K}{\sigma_\pi}$$

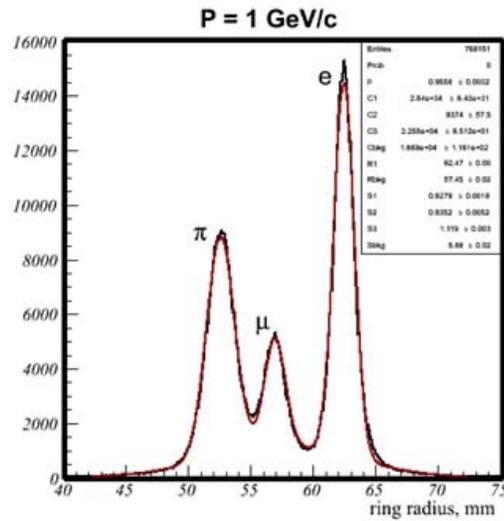


$\mu/\pi$ : **5.3 $\sigma$**  @ 1 GeV/c

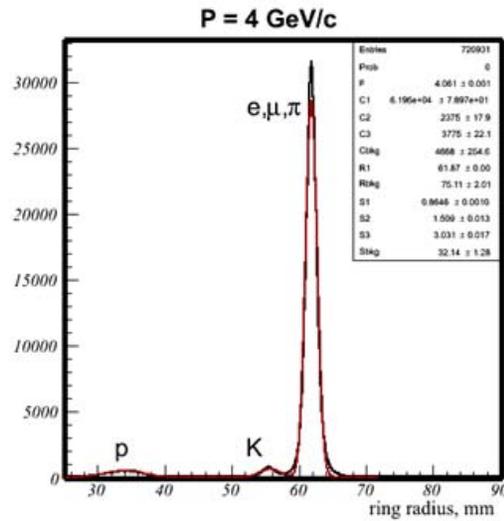


$\pi/K$ : **7.6 $\sigma$**  @ 4 GeV/c

2.3 times higher than SuperB FDIRC  
(NIM A595 (2008) 104)  
1.9 times higher than Belle II ARICH  
(NIM A (2013), <http://dx.doi.org/10.1016/j.nima.2013.06.080>)

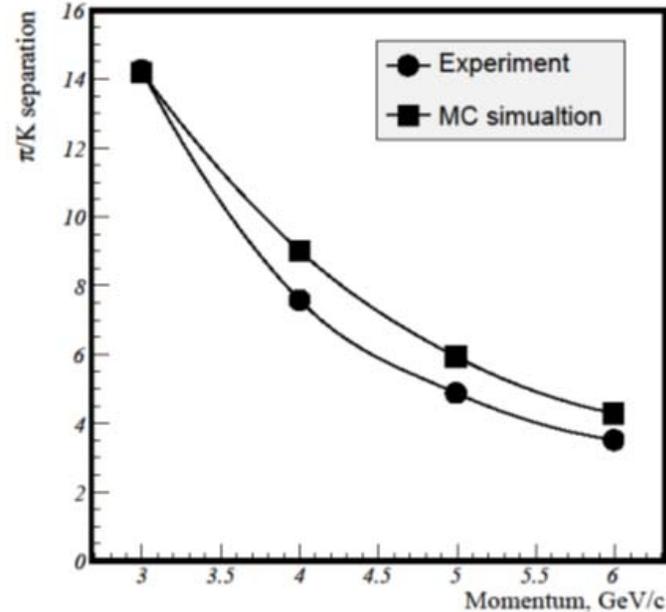

A.Yu. Barnyakov, et al., NIM A (2013),  
<http://dx.doi.org/10.1016/j.nima.2013.07.068>, Article in Press

Tests of FARICH prototype with fine photon position detection,  
E.A. Kravchenko, Mon 16:10




## Conclusion

- Beam test of FARICH prototype with Philips DPC was prepared and successfully realized in a short time scale.
- Cherenkov rings are detected from focusing aerogel with  $\sim 14$  photoelectrons for relativistic particles.
- Timing resolution of  $\sigma_t = 48$  ps is achieved for single Cherenkov photons.
- $\pi/K$  separation obtained for  $P=6$  GeV/c is  $3.8\sigma$ ,  $\mu/\pi$  separation is  $4.5\sigma$  for  $P=1$  GeV/c.
- Signs of radiation damage are observed that partially recovered by annealing at room temperature.
- Very positive experience of 2 weeks operation of the large and complex setup.
- Tests were continued at electron test beam in BINP in January 2013. Results are coming up.

*Tests of FARICH prototype with fine photon position detection,  
E.A. Kravchenko, Mon 16:10*






## 4 Introduction


### Requirements on electron identification



Rare probes:  $\rho, \omega, \phi \rightarrow e^\pm$ ,  $J/\psi, \psi' \rightarrow e^\pm$

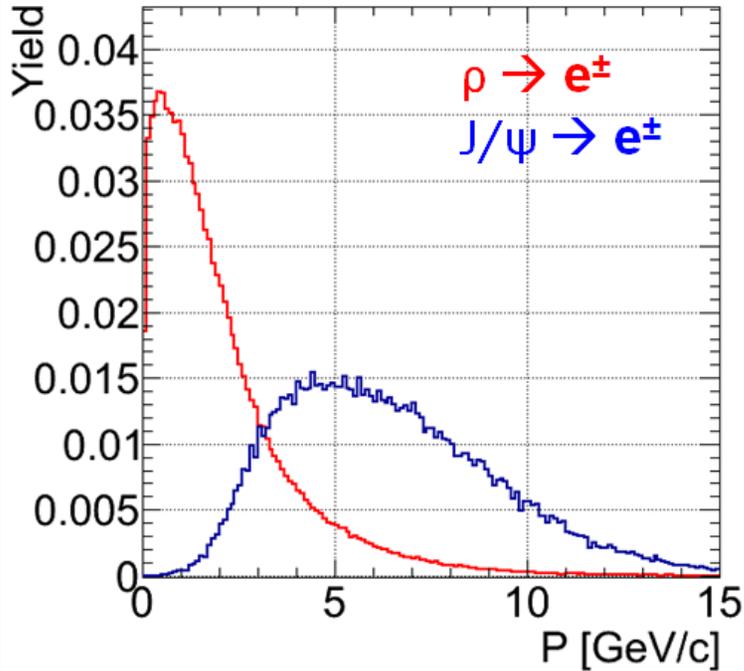

Momentum spectrum of decay-electrons from the  $\rho$  and  $J/\psi$  mesons

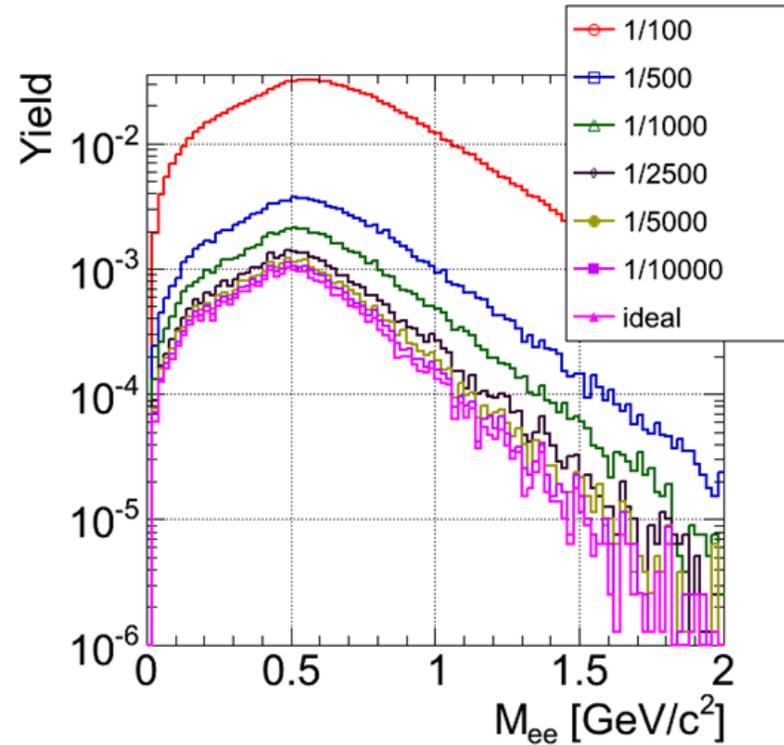

Combinatorial background for low-mass di-electron pairs assuming various pion misidentification levels

- Central Au+Au at 25A GeV:
- 700 pions are produced
- 310 lie in the RICH acceptance.

Identification of  $e^\pm$  with  $p < 10 \text{ GeV}$

pion rejection factor of  $\geq 10^4$

The CBM RICH Detector • Tariq Mahmoud • DIRC2013 • 05.09.2013

The CBM RICH project, C. Pauly, Mon 17:25



## 7 The Concept

## Three main components

$$P_{th} = \frac{m}{125}, \delta_{CO_2} = 4.3 \times 10^{-4}$$

$$e^- 17.4 \text{ GeV} \quad K^\pm 17 \text{ GeV}$$

$$\pi^\pm 4.6 \text{ GeV} \quad p 32 \text{ GeV}$$

### RADIATOR


- CO<sub>2</sub>;  $\gamma_{th} = 33$
- $p_{\pi,th} = 4.65 \text{ GeV}/c$
- $V \approx 30 \text{ m}^3$
- Length = 1.7 m

- 28 photons/ring
- $N_0 \approx 171 \text{ cm}^{-1}$
- $r_e = 4.56 \text{ cm}$  (res. 1.6%)




### MIRROR

- SIMAX-glass, Al+MgF<sub>2</sub>
- $R = 3 \text{ m}$ ,  $d \leq 6 \text{ mm}$
- 11.8 m<sup>2</sup>
- Tiles of 40×40 cm<sup>2</sup>

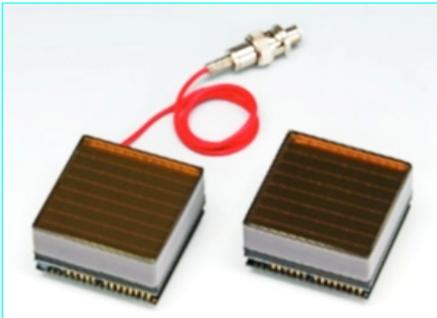


### CAMERA

- 2.4 m<sup>2</sup>, 55k Ch.
- MAPMT: H8500 series (Hamamatsu)?

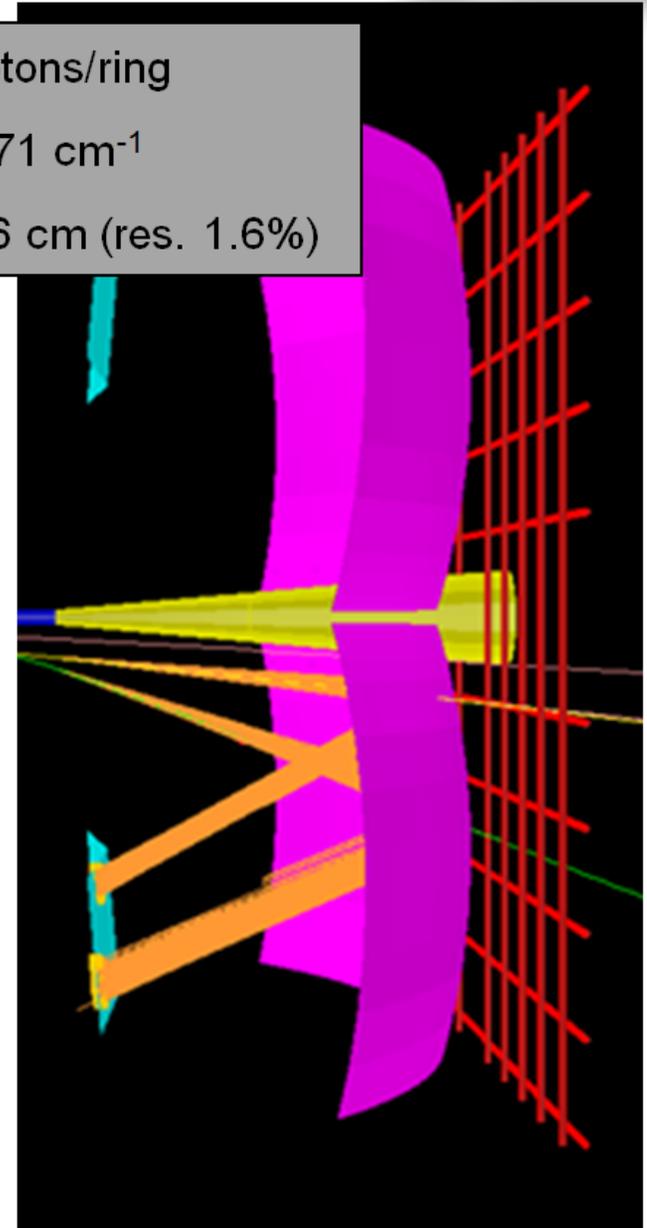

The CBM RICH Detector • Tariq Mahmoud • DIRC2013 • 05.09.2013




The CBM RICH project, C. Pauly, Mon 17:25



39


## Prototype: Electronics

New FPGA-TDC read-out electronics

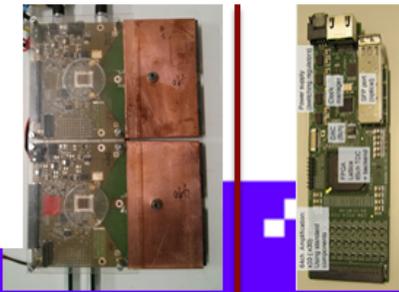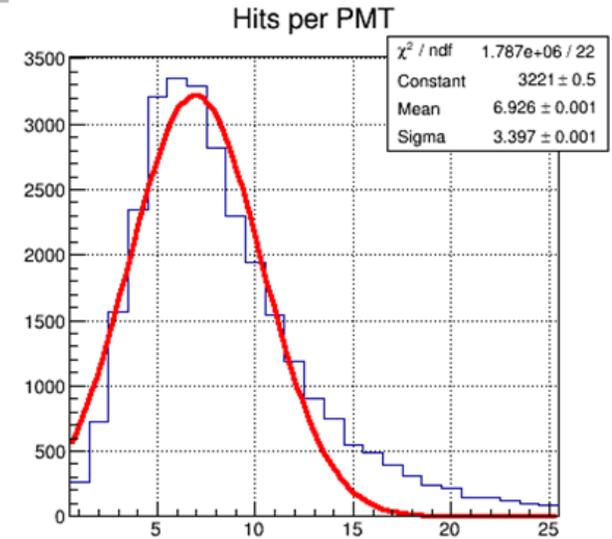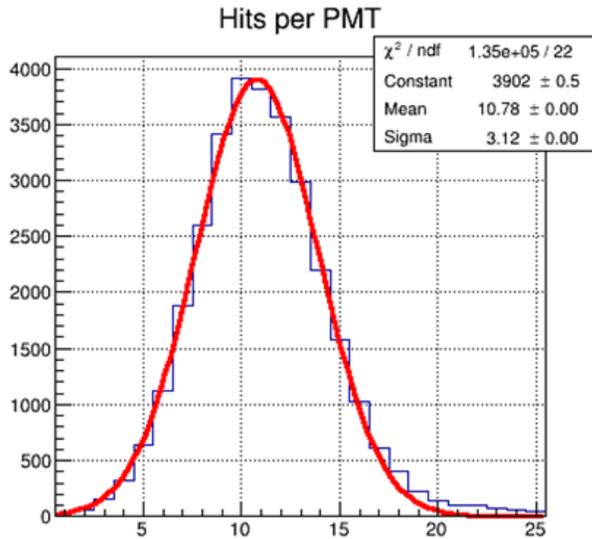

Hits per half ring: nXYter

Hits per half ring: TRBRICH

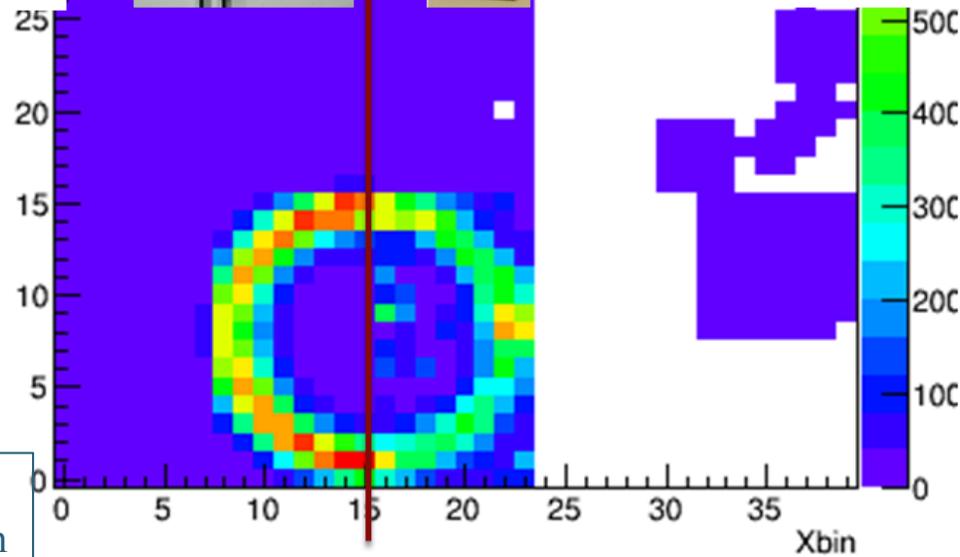


Prototype results from  
CERN test beam campaign

Integrated Cherenkov ring: left half nXYter, right half TRBRICH

The CBM RICH Detector • Tariq Mahmoud • DIRC2013 • 05.09.2013

The CBM RICH project, C. Pauly, Mon 17:25




- A RICH concept is established.
- Individual components tested and chosen.
- Real dimension RICH prototype successfully build and tested.
- Test beam:
  - Excellent qualitative and quantitative performance: number of photons and ring radius.
  - WLS test → up to 18% more photons.
  - Comparison of different photon sensors.
  - Up to 1% of O<sub>2</sub> impurity with no effects on number of photons and ring radius.
  - Fixing tolerances of mirror misalignment.
  - Test of new electronics.
- Very good working gas system.
- Simulation under realistic conditions show good physics performance.
- TDR delivered in June 2013.



## Technical Design Report for the CBM

### Ring Imaging Cherenkov (RICH) Detector

The CBM Collaboration

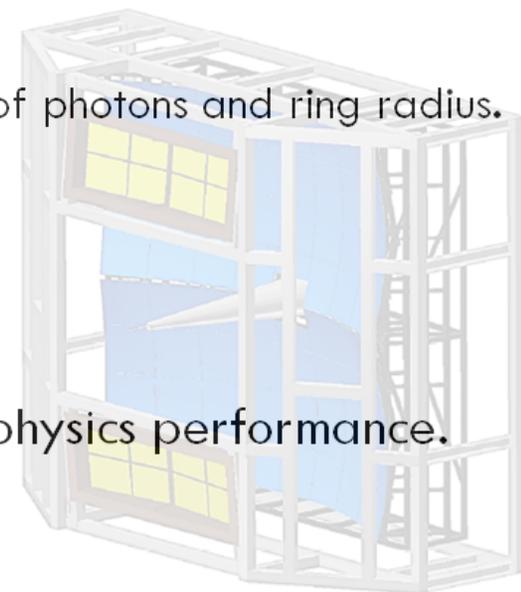

Compressed Baryonic Matter Experiment



## FDIRC FOR ITALIAN SUPERB




### Physics Goals

Exploration of CKM parameters at 1% precision.

New physics in search for CP violation in D decays,  
in search LFV in tau decays,  
in search CP violation in tau decays.

Sensitivity to New Physics phenomena  
up to energies  $\sim 30$  TeV  
(beyond LHC energies)

*Physics white paper*  
*arXiv:1008.1541*  
*Detector CDR*  
*arXiv:0709.0451*



## FDIRC FOR ITALIAN SUPERB

### Focusing DIRC (FDIRC):

barrel PID system for SuperB detector in Italy (Frascati/Tor Vergata).

### Important constraint:

BABAR DIRC bar boxes will be reused, readout outside magnetic field.


Expect much higher backgrounds at  $10^{36}/\text{cm}^2 \cdot \text{s}$  (100 times BABAR luminosity)

→ decrease size of expansion volume (main source of background in BABAR DIRC).


Design based on FDIRC R&D at SLAC (proof of principle); **new optics and electronics**

### Complete redesign of the photon camera (SLAC-PUB-14282)

- True 3D imaging using:
  - 25× smaller volume of the photon camera
  - 10× better timing resolution to detect single photons
- Optical design is based entirely on Fused Silica glass  
avoid water or oil as optical medium


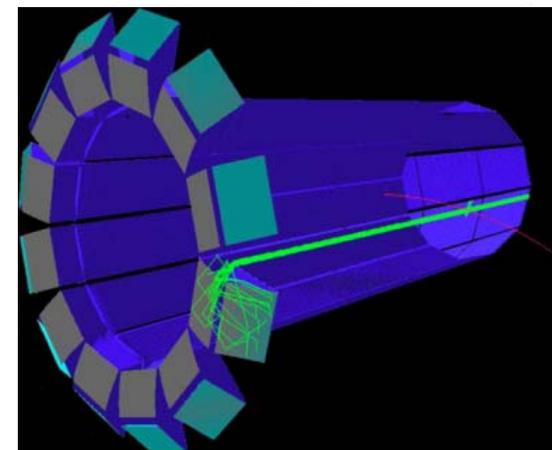



Results from the FDIRC prototype, D. Roberts, Mon 18:35



## FDIRC FOR ITALIAN SUPERB



- Photon camera design (FBLOCK):
  - Initial design by ray-tracing (SLAC-PUB-13763)
  - Geant4 model now (SLAC-PUB-14282 – RICH 2010 talk)
  - Focusing block from Corning 7980 sythetic fused silica
- Main optical components
  - New wedge (old bar box wedge was not long enough)
  - Cylindrical mirror to remove bar thickness
  - Double-folded mirror optics to provide access to detectors
- Photon detectors: highly pixilated H-8500 MaPMTs
  - Total number of detectors per FBLOCK: 48
  - Total number of detectors: 576 [12 FBLOCKs]
  - Total number of pixels:  $576 \times 32 = 18,432$

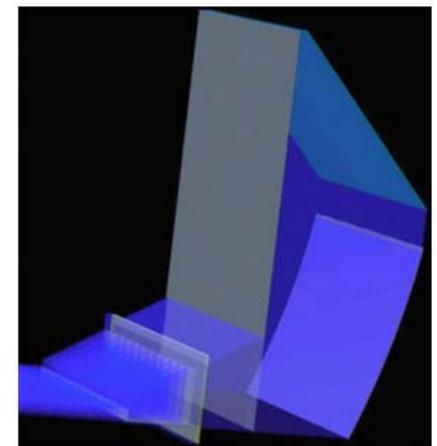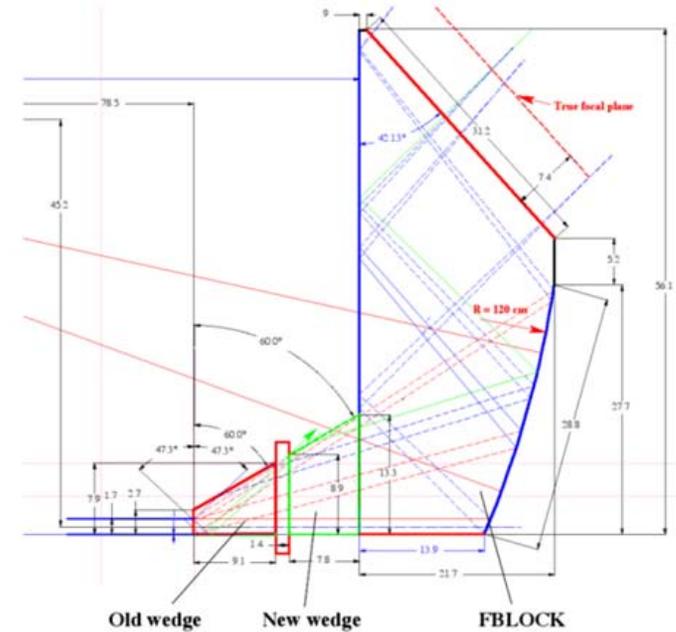



## FDIRC FOR ITALIAN SUPERB


- FDIRC design parameters
  - Timing resolution per photon:  $\sim 200$  ps
  - Cherenkov resolution per photon: 9-10 mrad
  - Cherenkov angle resolution per track: 2.5-3.0 mrad
  - Cherenkov angle determined from 2D spatial coordinates
  - Time primarily used to correct chromatic dispersion
- Members of the SuperB PID system
  - USA: SLAC, Maryland, Cincinnati
  - France: LAL, LPNHE
  - Italy: Bari, Padova
  - Russia: Novosibirsk

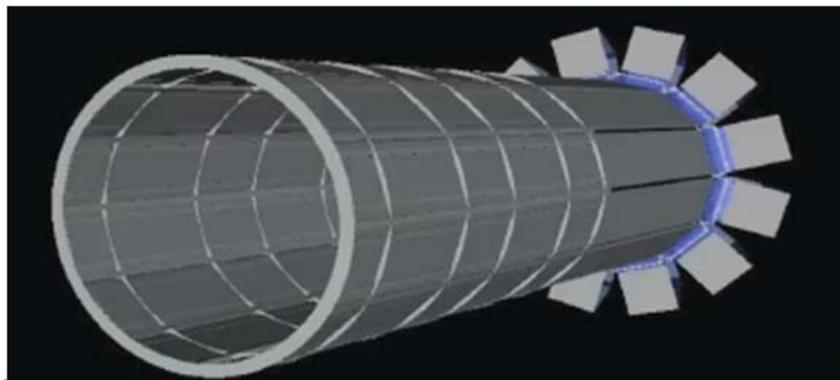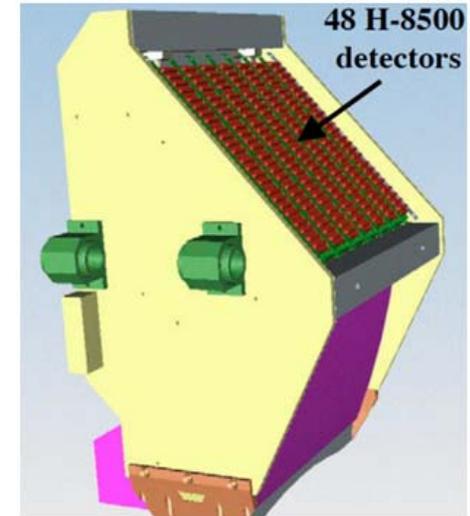

Photon cameras at the end of bar boxes in Geant4



New focusing block at SLAC.




## First full-size FDIRC sector at SLAC CRT

A proof-of-principle of the technology

Test facility: SLAC Cosmic Ray Telescope

- Selects muons with  $p > 2 \text{ GeV}$  so that  $\theta_c = 47.2^\circ$
- Good tracking resolution of  $\sim 1.5 \text{ mrad}$
- 3D muon tracks (needed to fully characterize the device)
- Precise timing given by a small Cherenkov start-counter

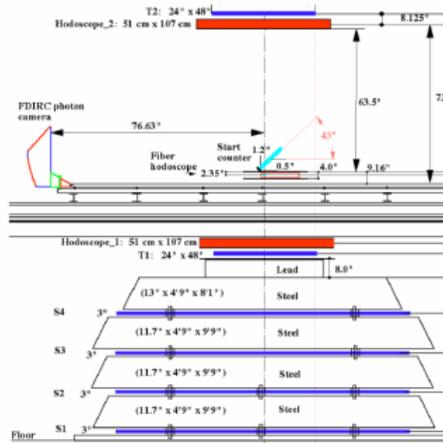

[NIMA701 \(2013\) 115-126](#)  
[SLAC-PUB-13873](#)


## First FDIRC sector built and instrumented

- First fused silica optical block manufactured
- Plating of the surfaces
- Optical coupling
- Mechanical enclosure (Fbox)
- 12 H-8500 MaPMTs (768 channels)
- Fast digitizing electronics (SLAC, Hawaii, LAL)



## Data analysis


- Full Geant4 simulation is needed to map pixel hits to photon directions (lookup table)
- Ambiguities due to the multiple possible photon paths:
  - Complex problem ( $>10$  ambiguities per hit)
  - Use hit time to remove some of the ambiguities
  - Various reconstruction algorithms being studied

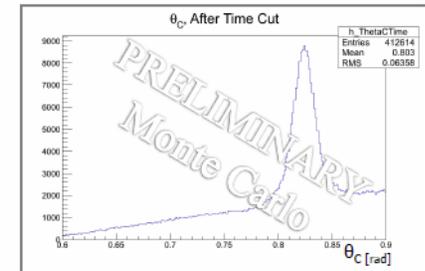

Data are being collected right now  
Results are expected soon


Martino Borsato, VCI2013

Results from the FDIRC prototype, D. Roberts, Mon 18:35




## Cherenkov angle resolution in cosmic ray telescope with 3D tracks


New photon camera is added to BaBar bar box

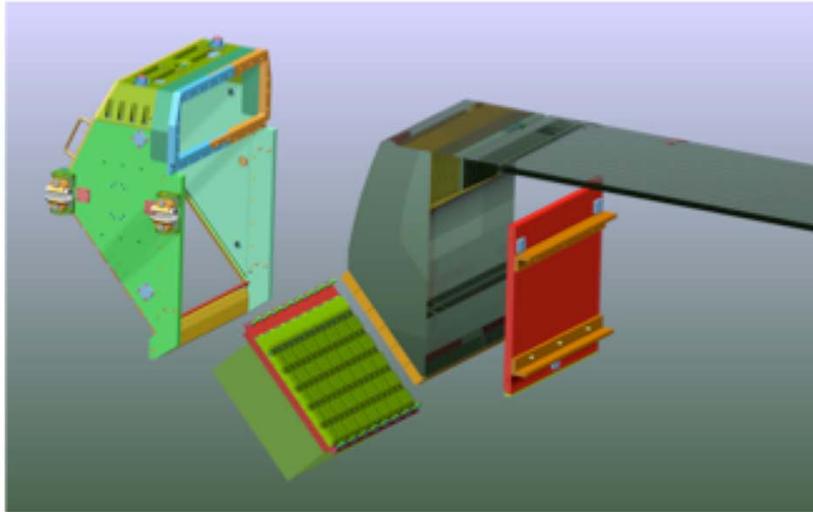


New photon camera

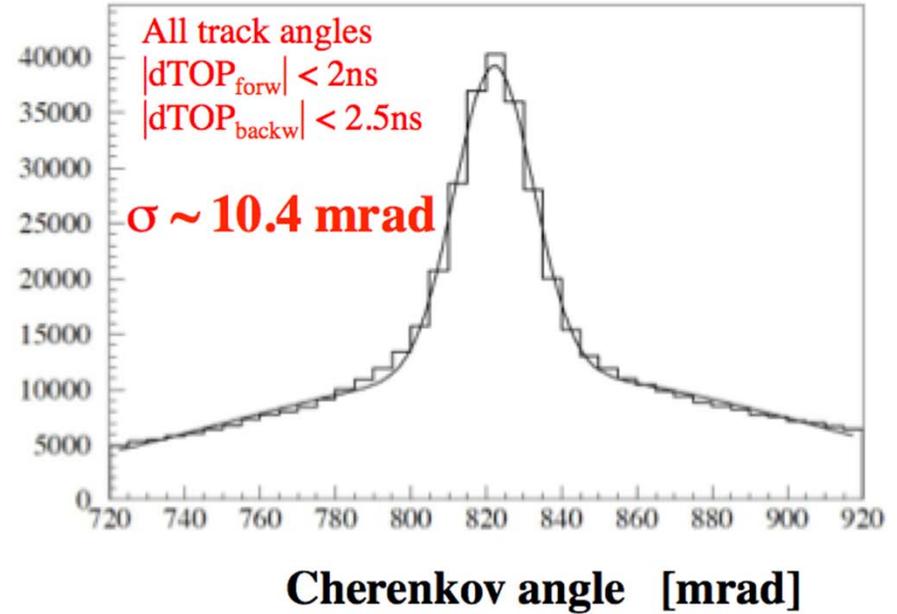

Electronics



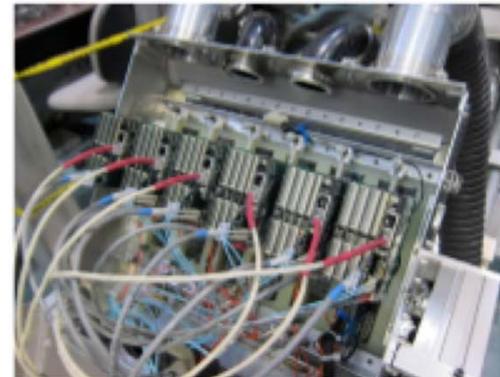


- Measured Cherenkov angle resolution (10.4 mrad) with hard muons (>2GeV) in cosmicray telescope with 3D tracks and real DIRC bar box.




## Chromatic correction using 3D tracks and real bar box

**Backward photons:**

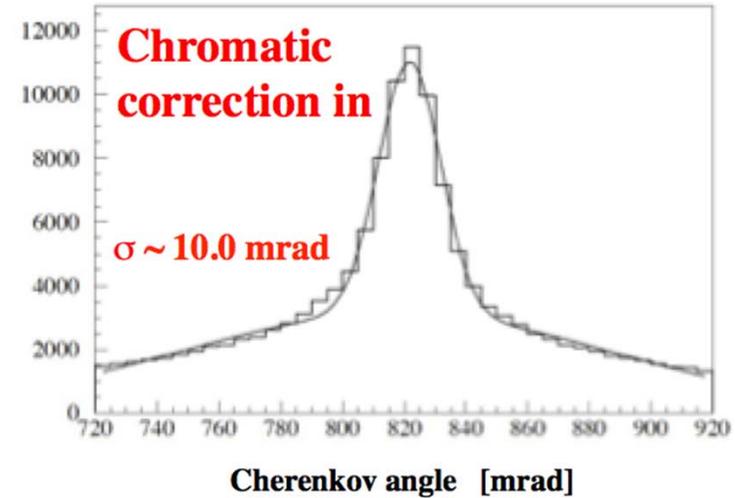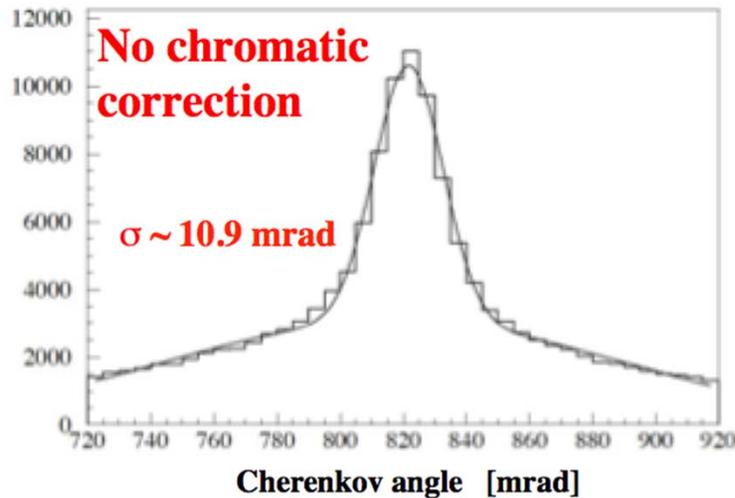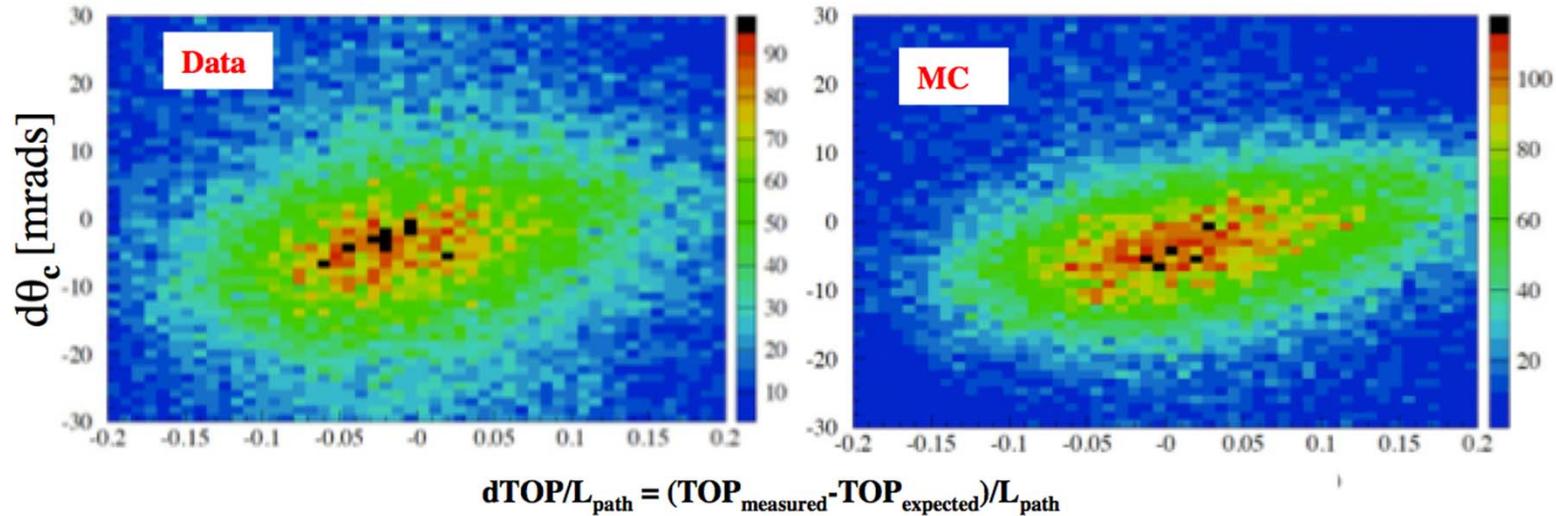

- Use this correlation from data to correct  $\theta_c$  by time. We gain about  $\sim 0.8$  mrad. MC expects a gain of  $\sim 1$  mrad. We hope to further improve this correction by improving timing resolution.



## RICH of HERMES -- Dual Radiator RICH: aerogel and C<sub>4</sub>F<sub>10</sub>

Pion, Kaon, Proton and Antiproton Identification at 2-14 GeV/c


HERMES is a deep inelastic scattering experiment.

The beam is 27.6 GeV electron or positron of DESY.

The targets are internal gas targets: proton, deuteron, and nuclei -- polarized and unpolarized

The **Spin Structure of The Nucleon** is studied.



Hadrons are detected in coincidence with scattered electron.

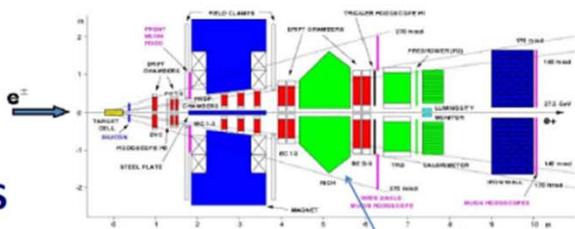


HERMES

Dual Radiator RICH

Aerogel,  $n=1.0304$ , C<sub>4</sub>F<sub>10</sub> gas,  $n=1.00137$

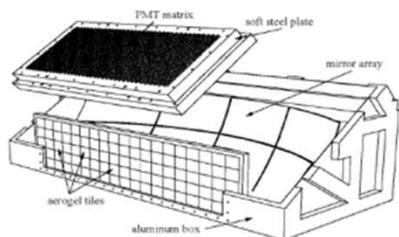

Cherenkov lights are reflected with a common mirror and are detected with 1934 phototubes of 3/4 inch diameter.





A wall made of aerogel tiles



Examples of dual Cherenkov rings:

Outer ring - aerogel

Inner ring - C<sub>4</sub>F<sub>10</sub> gas

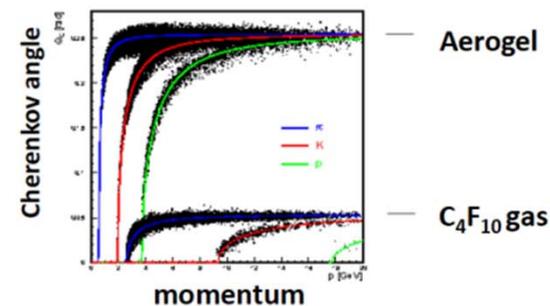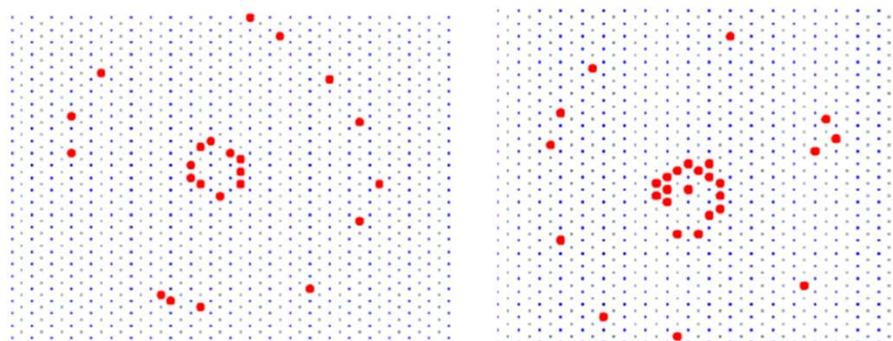

### Recent Physics Results from HERMES with RICH

A. Airapetian et al., HERMES, Phys. Rev. D 87 (2013) 012010

Azimuthal asymmetry of pions and Kaons with unpolarized proton and deuteron targets