

Preamplifier power supply

+Vcc = 6.5 V (Channel 2: Green) and -Vcc = 4.0 V (Channel 3: Blue).



← ground connection

Dual banana plug



Preamplifier power supply


Preamplifier power supply is just below the Travelling MUSIC at S4.

+Vcc = 6.5 V (Channel 2: Green) and -Vcc = 4.0 V (Channel 3: Blue).

The polarities are adjusted properly. You have to only enter the values.



Switch on the power button.

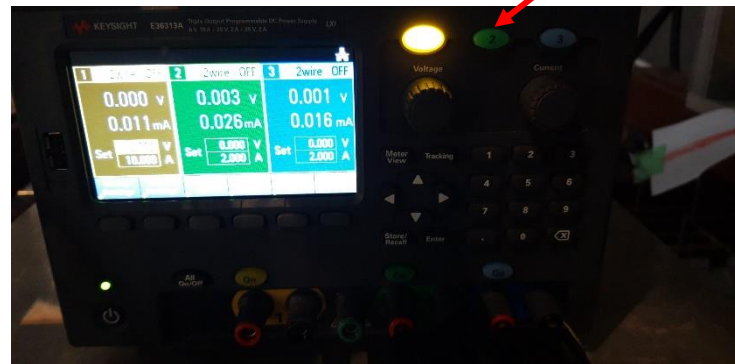


After switching on, press 2.




2 ON (green color)

Then press "ON" for channel 2

Preamplifier power supply (contd.)

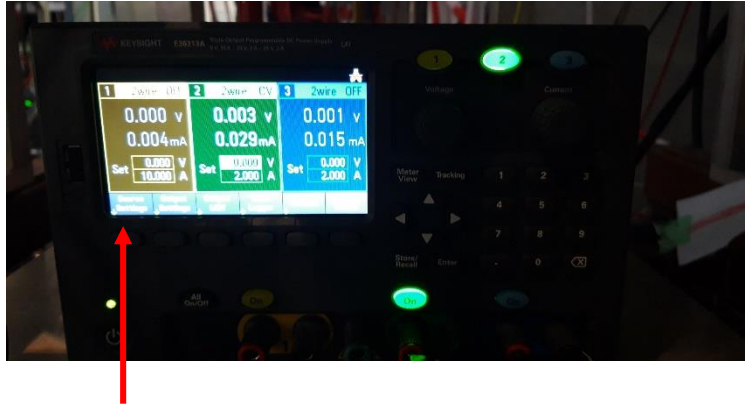

Press the button below “Source setting”

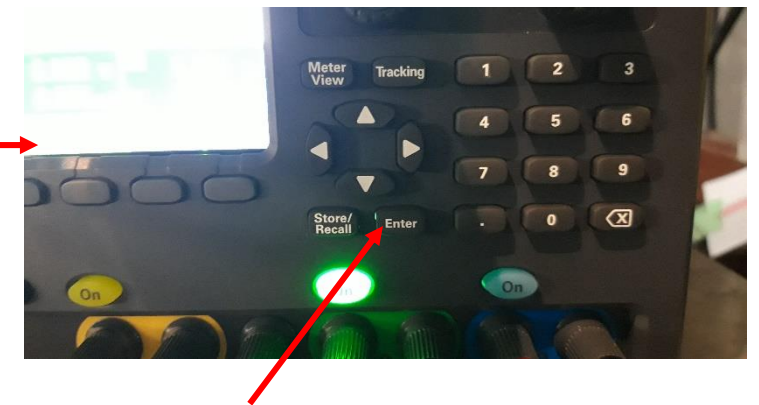


Put 6.5 Volts and press Enter

After this you will see that in Travelling MUSIC panel a green LED is on.



Preamplifier power supply (contd.)

3 (blue color)

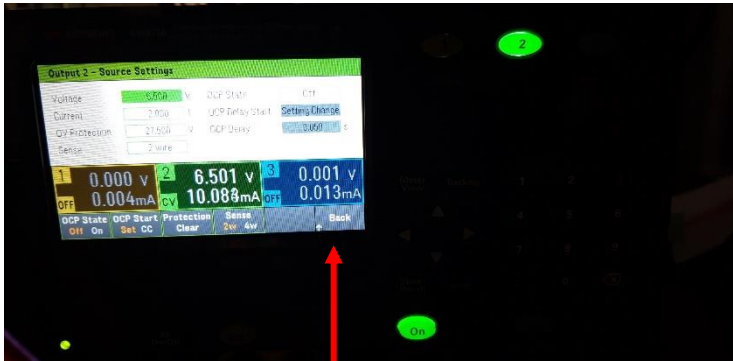

Now press the back button



Then press 3.



3 ON (blue color)

Then press "ON" for channel 3



Before switching on the button for preamps in MUSIC, you will see such values in the power supply module




Enter "4.0 V" and press "Enter" and then "Back button"

Then press "Source setting"

Preamplifier power supply (contd.)

Then you can switch on the button in MUSIC Panel. You will see that the green light changed to blue.

Button for MUSIC

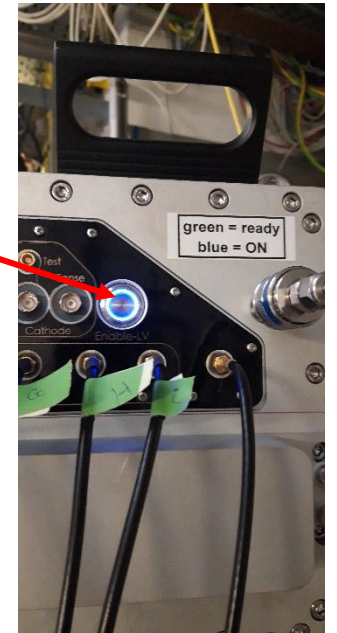

After switching on the MUSIC, you will see that the current value has been changed in the preamplifier power supply.

